




TEST REPORT IEC 60335-2-79 HOUSEHOLD AND SIMILAR ELECTRICAL APPLIANCES – SAFETY – Part 2-79: Particular requirements for high pressure cleaners and steam cleaners	
Report Number..... :	3508719.50A
Date of issue..... :	2023-04-19
Total number of pages	144 pages
Name of Testing Laboratory preparing the Report	DEKRA Testing and Certification S.r.l. CBTL of DEKRA Certification B.V.
Applicant's name	Fortador K.A. Traczyńscy Sp. Komandytowo-Akcyjna
Address..... :	ul. Aleja Krakowska 108, 05-090 Sękocin Stary, Poland
Test specification:	
Standard	IEC 60335-2-79:2021 used in conjunction with IEC 60335-1:2020
Test procedure	GB Scheme CE
Non-standard test method	N/A
TRF template used..... :	IECEE OD-2020-F1:2020, Ed.1.3
Test Report Form No. :	IEC60335_2_79K
Test Report Form(s) Originator :	SLG Prüf- und Zertifizierungs GmbH
Master TRF	Dated 2021-07-23
Copyright © 2021 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed. This report is not valid as a CB Test Report unless signed by an approved IECEE Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.	
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing NCB. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

Test item description..... :	Steam cleaner	
Trade Mark(s) :	FORTADOR	
Manufacturer :	Fortador K.A. Traczyńscy Sp. Komandytowo-Akcyjna Ul.Aleja Krakowska 108 05-090 Sękocin Stary, Poland	
Model/Type reference :	Pro	
Ratings..... :	230 V AC; 50-60 Hz; 650 W; IPX4; Class I; Rated pressure: 1,6 Mpa; Max. pressure: 2,0 Mpa; Max rated temperature: 260 °C; Rated flow: 3 l/min; Max burner power: 24 kW; total weight: 150 kg	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
☐	CB Testing Laboratory:	DEKRA Testing and Certification S.r.l.
Testing location/ address :		Via Martiri della Liberazione 12, 23875 Osnago (LC) Italy
Tested by (name, function, signature)..... :		Alessandro Luciani (ENG) 
Approved by (name, function, signature).... :		Gabrio Spinelli (REW) 
Testing procedure: CTF Stage 1:		
Testing location/ address :		
Tested by (name, function, signature)..... :		
Approved by (name, function, signature).... :		
Testing procedure: CTF Stage 2:		
Testing location/ address :		
Tested by (name + signature) :		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature).... :		
Testing procedure: CTF Stage 3:		
Testing procedure: CTF Stage 4:		
Testing location/ address :		
Tested by (name, function, signature)..... :		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature).... :		
Supervised by (name, function, signature) :		

List of Attachments (including a total number of pages in each attachment):

3508719.50A	TRF: IEC 60335-2-79:2021 used in conjunction with IEC 60335-1:2020
3508719.50B	TRF: EN 60335-2-79:2012 in conjunction with EN 60335-1:2012 and EN 50366:2003 + A1:2006 or EN 62233:2008
3508719.50C	Annex – Photos documentation

Summary of testing:**Tests performed (name of test and test clause):****Project 3508719.50:**

Clause 7 Marking and Instructions
 Clause 8 Protection against access to live parts
 Clause 10 Power input and current
 Clause 11 Heating (except clause 11.101)
 Clause 13 Leakage current and dielectric strength at operating temperature
 Clause 15 Moisture resistance
 Clause 16 Leakage current and dielectric strength
 Clause 17 Overload protection of transformers and associated circuits
 Clause 19 Abnormal use (except clause 19.11, 19.12, 19.101, 19.102, 19.103, 19.104)
 Clause 20 Stability and mechanical hazards
 Clause 21 Mechanical strength (except clause 21.101 for high pressure hose)
 Clause 22 Construction (except clause 22.48 and 22.107)
 Clause 23 Internal wiring
 Clause 24 Components
 Clause 25 Supply connection and external flexible conductors
 Clause 26 Terminal for external conductors
 Clause 27 Provision for earthing
 Clause 28 Screws and connections
 Clause 29 Clearances, creepage distance and solid insulation
 Clause 30 Resistance to heat and fire (except clause 30.2 for some components. See general product information)
 Clause 31 Resistance to rusting
 Clause 32 Radiation, toxicity and similar hazards

Testing location:

DEKRA Testing and Certification S.r.l.
 Via Martiri della Liberazione 12, 23875 Osnago (LC)
 Italy

Summary of compliance with National Differences (List of countries addressed):

European group differences verified and complied with.

☒ **The product fulfils the requirements of:**

IEC 60335-1:2020 (Sixth Edition)	EN 60335-1:2012 + AC:2014 + A11:2014 + A13:2017 + A1:2019 + A2:2019 + A14:2019
IEC 60335-2-79:2021	EN 60335-2-79:2012
	EN 62233:2008

Although the text of EN 60335-1:2012/AC:2014 + A11:2014 + A13:2017 + A1:2019 + A14:2019 + A2:2019 + A15:2021 were not included in this official Test report form, these amendments have been considered and appliance comply with them

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ **Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:**

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

☒ **Statement not required by the standard used for type testing**

(Note: When IEC or ISO standard requires a statement concerning the uncertainty of the measurement systems used for tests, this should be reported above. The informative text in parenthesis should be delete in both cases after selecting the applicable option)

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBS that own these marks.

Manufacturer:	Fortador Europe	
Model:	Pro 16	
Voltage:	230 V AC 50-60 Hz	
Power:	650W	IPX4
Rated pressure:	1,60 MPa	
Max. pressure:	2,00 MPa	
Max. rated temperature:	260 °C	
Max. weight:	150 kg	
S/N:	B010280	
Rated flow l/min:	3	
Max burner power:	24 kW	
Manufacturing year:	2023	


FORTADOR
powered by e-fortador
ul. Al. Krakowska 108 ;
05-090 Sękocin Stary ;
POLAND



Before use read the instruction carefully! Made in European Union



Test item particulars..... :	
Classification of installation and use..... :	Stationary appliance with wheels. Normally placed on a floor
Supply Connection	Type Y non detachable power supply cord provided with plug.
Possible test case verdicts:	
- test case does not apply to the test object..... :	N/A
- test case does not apply to the test object..... :	N/V
- test object does meet the requirement..... :	P (Pass)
- test object does not meet the requirement..... :	F (Fail)
Testing..... :	
Date of receipt of test item	2022-06-28
Date (s) of performance of tests	From 2022-07-06 to 2023-03-09
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. Throughout this report a ☒ comma / ☐ point is used as the decimal separator. Project 3508719.50: Original report.	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60335-1:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	☐ Yes ☒ Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies)	Fortador K.A. Traczyńscy Sp. Komandytowo-Akcyjna ul. Aleja Krakowska 108 05-090 Sękocin Stary, Poland
General product information and other remarks:	
The equipment described in this test report is a stationary appliance, class I fan-assisted Diesel fueled steam cleaner, provided with wheels, for indoor use, normally placed on a floor. It is mainly composed by a supply cord with plug (type Y attachment), a boiler heated by a burner with electric pre-heater, a solenoid valve, a mechanical fuel pump rotating through an asynchronous motor (with run capacitor), a water filter, an ignition transformer, a motor pump for boiler refilling, a pressure transducer, a capillary type thermal cut-out (260 °C), a safety pressure relief valve (1,8 MPa), a printed board to manage functioning, a display board with touch controls, a residual current device, a radio interference filter, an interlock switch, an emergency switch, a vibration pump for detergent and a vibration pump for water, each one with its own self resetting thermal cut-out. Vibrating pumps duty cycle is 5 s ON / 5 s OFF.	

In normal operation, steady conditions are reached when pressure transducer detects rated pressure. In abnormal operation, pressure relief valve opens when pressure transducer is rendered inoperative. Steam boiler refilling is controlled by water level sensing controlled by electronic circuits. When refilling is rendered inoperative, burning function ceases when a capillary self-resetting thermal cut-out opens (with boiler emptied).

On the front, a hinged door with an interlock switch and a key lock gain access to the internal parts for service and maintenance.

User interface is a touch panel also providing information about machine functioning. An emergency switch is provided to switch off the machine.

On the rear top of the machine, there are a tank cap for water reservoir, a tank cap for fuel reservoir and a tank cap for detergent reservoir.

On the rear bottom of the machine, there are a boiler drain tap, a water drain tap, a detergent drain tap, a fuel drain tap, two steam taps with non-return valves for connection to pressure hose set and a connection to water mains.

A minimum of one and a maximum of two pressure hose sets can be connected at the same time.

Pressure hose sets are provided with a locking mean to avoid unintentional steam emission. Pressure hose sets are not provided with electric components. Trigger guns have only mechanical components to control steam output. Hose sets remain in pressure when steam emission is stopped.

Boiler capacity is 10,5 litres. Rated pressure is 1,6 Mpa. Maximum pressure is 2,0 Mpa. Rated temperature is 260 °C.

Water tank capacity is 20 liters. Fuel tank capacity is 10 liters. Detergent tank capacity is 5 liters.

Machine indicates with an audible alarm when minimum level for each tank is reached. Minimum level is detected with an electronic sensor for each tank.

Tests of clause 11.101 were not verified, according to the manufacturer.

Tests of clause 19.11 were not verified as electric schemes for printed board were not provided, according to the manufacturer.

Tests of clauses 19.101, 19.102 and 19.103 were not verified according to the manufacturer.

Test of clause 21.101 for high pressure hose was not verified according to the manufacturer.

Product of pressure and volume exceeds 5 Mpa x l for steam boiler. This report does not cover an evaluation for pressure equipment directive 2014/68/EU. License holder shall provide an own risk assessment relating to pressure hazards of steam boiler.

Tests of clause 22.48 and annex AA were not verified according to the manufacturer. License holder shall provide an own risk assessment for pollution of potable water due to the lack of a backflow preventer.

Tests of clause 22.107 were not verified according to the manufacturer. License holder shall provide an own risk assessment for this clause.

Tests of clause 30.2 on refilling pump connector, oil pump motor connector and burner unit black connector were not verified according to the manufacturer. License holder shall provide an own risk assessment relating this clause for these components.

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
5	GENERAL CONDITIONS FOR THE TESTS		
	Tests performed according to clause 5, e.g. nature of supply, sequence of testing, etc.		P
5.101	The test solution shall be stored in a sealed container, in an ambient between 3 °C and 8 °C and used within seven days after its preparation (IEC 60335-2-79:2021)		N/A
5.102	Protective devices and safety valves shall remain fully functional but shall not operate under normal operation (IEC 60335-2-79:2021)		P
5.103	The typical operational mass (ToM) shall be applied, if required (IEC 60335-2-79:2021)		P
6	CLASSIFICATION		
6.1	Protection against electric shock: Class I, II or III (IEC 60335-2-79:2021) :	Class I	P
	Hand-held appliances and hand-held parts containing electrical components of steam cleaners (IEC 60335-2-79:2021) and		N/A
	high pressure cleaners shall be class II or class III (IEC 60335-2-79:2021)		N/A
6.2	Protection against harmful ingress of water	IPX4	P
	The machines shall have a degree of protection against harmful ingress of water according to Table 101 (IEC 60335-2-79:2021):		—
	Steam cleaners for indoor use only: protection class I, II, (electric shock) and protection degree (IEC 60529) IPX4 (IEC 60335-2-79:2021)		P
	Steam cleaners for indoor use only: protection class III (electric shock) and protection degree (IEC 60529) IPX3 (IEC 60335-2-79:2021)		N/A
	Steam cleaners for outdoor use only: protection class I, II, III (electric shock) and protection degree (IEC 60529) IPX5 (IEC 60335-2-79:2021)		N/A
	Steam cleaners, hand-held parts: protection class II (electric shock) and protection degree (IEC 60529) IPX7 (IEC 60335-2-79:2021)		N/A
	Steam cleaners, hand-held parts: protection class III (electric shock) and protection degree (IEC 60529) IPX3 (IEC 60335-2-79:2021)		N/A
	High pressure cleaners, hand-held appliances: protection class II, III (electric shock) and protection degree (IEC 60529) IPX7 (IEC 60335-2-79:2021)		N/A
	High pressure cleaners, other types of appliances: protection class I, II, III (electric shock) and protection degree (IEC 60529) IPX5 (IEC 60335-2-79:2021)		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	High pressure cleaners, hand-held parts: protection class II, III (electric shock) and protection degree (IEC 60529) IPX7 (IEC 60335-2-79:2021)		N/A
	However fixed appliances that are specified for installation in a separate room, where they will not be subject to spillage or splashing of water, shall be at least IPX0 (IEC 60335-2-79:2021)		N/A
7	MARKING AND INSTRUCTIONS		
7.1	Rated voltage or voltage range (V)..... :	230	P
	Symbol for nature of supply, or..... :		N/A
	Rated frequency (Hz) :	50 - 60 Hz	P
	Rated power input (W), or :	650 W	P
	Rated current (A) :		N/A
	Business name and address of the manufacturer : (IEC 60335-2-79:2021) and		P
	if applicable, his authorized representative; any address shall be sufficient to ensure postal contact (IEC 60335-2-79:2021) :	Fortador K.A. Traczyńscy Sp. Komandytowo-Akcyjna Ul.Aleja Krakowska 108 05-090 Sękocin Stary, Poland	P
	Model or type reference..... :	Pro	P
	Symbol IEC 60417-5172, for class II appliances	Class I appliance	N/A
	IP number, other than IPX0 :	IPX4	P
	Symbol IEC 60417-5180, for class III appliances, unless		N/A
	the appliance is operated by batteries only, or		N/A
	the appliance is powered by rechargeable batteries recharged in the appliance		N/A
	Appliance outlets accessible to the user and socket-outlets accessible to the user:		—
	- that are incorporated in appliances connected to the supply mains, and		N/A
	- that operate at rated voltage		N/A
	marked with their outlet load (W or A) :		N/A
	Appliances intended to be supplied from a detachable power supply part to recharge the battery:		—
	- symbol ISO 7000-0790		N/A
	- symbol IEC 60417-6181		N/A
	- model or type reference of the detachable power supply part, or :		N/A
	- the substance of the following:		—
	Use only with <model or type reference> supply unit		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Symbol IEC 60417-5018, for class II and class III appliances incorporating a functional earth		N/A
	Symbol IEC 60417-5036, for the enclosure of electrically-operated water valves in external hose-sets for connection of an appliance to the water mains, if the working voltage exceeds extra-low voltage		N/A
	Appliances additionally marked with (IEC 60335-2-79:2021):		—
	– serial number, if any; (IEC 60335-2-79:2021)		P
	– designation of the machine and series or type, allowing the technical identification of the product. This may be achieved by a combination of letters and/or numbers (IEC 60335-2-79:2021)		P
	– the year of construction, that is the year in which the manufacturing process is completed; (IEC 60335-2-79:2021)		P
	– rated pressure (Pa) (IEC 60335-2-79:2021)..... :	1,6 MPa	P
	– allowable pressure (Pa) (IEC 60335-2-79:2021)..... :	2,0 MPa	P
	– rated flow (l/min) (IEC 60335-2-79:2021)..... :	3 l/min	P
	– maximum flow rate, if necessary (l/min) (IEC 60335-2-79:2021)..... :		N/A
	– maximum rated temperature (if > 50 °C) (IEC 60335-2-79:2021)..... :	260 °C	P
	– max. power of the water heater (kW) (IEC 60335-2-79:2021)..... :	24 kW	P
	Machines equipped with wheels and other mobile machinery are marked with the ToM (kg) (IEC 60335-2-79:2021)	150 kg	P
	A yellow label with black lines showing the substance of the warning symbols in accordance with Figure 101 shall be permanently fixed to the machine. (IEC 60335-2-79:2021)		P
	Machines shall be additionally marked with the following, if applicable: (IEC 60335-2-79:2021)		—
	- When the surface of flue or duct for exhaust gases exceeding a temperature rise of 60 K: "Warning: Hot - Do not touch" (IEC 60335-2-79:2021)		P
	The height of the lettering is not less than 4 mm. This wording may be replaced by symbol IEC 60417-5041 (2002-10) (IEC 60335-2-79:2021)		P
	– Steam cleaners marked with symbol IEC 60417-5597 (IEC 60335-2-79:2021)		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	– Machines not intended to connect to the water mains, marked with figure 104 (IEC 60335-2-79:2021)		N/A
	– Machines intended to be used indoors and powered by internal combustion engines, except LPG-powered engines, marked with the symbol according to Figure 105 (IEC 60335-2-79:2021)	No internal combustion engines	N/A
	It is acceptable to show this symbol in monochrome colour (IEC 60335-2-79:2021)		N/A
7.1.101	All high pressure hoses marked with the following: (IEC 60335-2-79:2021)		—
	– with a pressure of at least the allowable pressure (Pa) (IEC 60335-2-79:2021):.....	220 bar (22 MPa)	P
	– max. temperature (°C) (IEC 60335-2-79:2021):..... :	160 °C	P
	– manufacturer's name (IEC 60335-2-79:2021):.	PA	P
	- date of production (IEC 60335-2-79:2021):..... :	mold date	P
7.1.102	All high pressure accessories (e.g. trigger gun, spray lance) marked with the following: (IEC 60335-2-79:2021)		—
	– pressure of at least the allowable pressure (Pa) (IEC 60335-2-79:2021):..... :	220 bar (22 MPa)	P
	– max. temperature (°C) (IEC 60335-2-79:2021):	160 °C	P
7.1.103	Motorized cleaning heads marked with: (IEC 60335-2-79:2021)		—
	– rated voltage or rated voltage range (V) (IEC 60335-2-79:2021):..... :		N/A
	– rated power input (W) (IEC 60335-2-79:2021) :		N/A
	– name, trade mark or identification mark of the manufacturer or responsible vendor (IEC 60335-2-79:2021):..... :		N/A
	– model or type reference (IEC 60335-2-79:2021):..... :		N/A
	- year of construction, i.e. the year in which the manufacturing process is completed (IEC 60335-2-79:2021):..... :		N/A
	– mass of the most usual configuration (kg) (IEC 60335-2-79:2021):..... :		N/A
	Motorized cleaning heads for water-suction cleaning appliances, except those of class III construction having a working voltage up to 24 V marked with symbol IEC 60417-5935 (2012-09) (IEC 60335-2-79:2021)		N/A
7.2	Warning for stationary appliances for multiple supply		N/A
	Warning placed in vicinity of terminal cover		N/A
7.3	Range of rated values marked with the lower and upper limits separated by a hyphen		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Different rated values marked with the values separated by an oblique stroke		N/A
	This requirement also applies to appliances with provision for connection to both single-phase and multi-phase supplies		N/A
7.4	Appliances adjustable for different rated voltages or rated frequencies, the voltage or the frequency setting is clearly discernible		N/A
	If frequent changes in voltage or frequency setting are not required, the rated voltage or rated frequency to which the appliance is to be adjusted can be determined from a wiring diagram		N/A
	Wiring diagram may be on the inside of a cover that has to be removed to connect the supply conductors		N/A
	Wiring diagram not on a label loosely attached to the appliance		N/A
7.5	Appliances with more than one rated voltage or one or more rated voltage ranges, marked with rated input or rated current for each rated voltage or range, unless		N/A
	the power input or current are related to the arithmetic mean value of the rated voltage range		N/A
	Relation between marking for upper and lower limits of rated power input or rated current and voltage is clear		N/A
7.6	Correct symbols used		P
	Symbol for nature of supply placed next to rated voltage		N/A
	Symbol for class II appliances placed unlikely to be confused with other marking		N/A
	Units of physical quantities and their symbols according to international standardized system		P
	Additional symbols give no rise to misunderstanding		P
	Symbols specified in IEC 60417 and ISO 7000 may be used		P
	Symbol IEC 60417-5597 used: steam, low jet (IEC 60335-2-79:2021)		P
	Symbol IEC 60417-5041 used: hot surface (IEC 60335-2-79:2021)		P
7.7	Connection diagram fixed to appliances to be connected to more than two supply conductors and appliances for multiple supply, unless		N/A
	correct mode of connection is obvious		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	For multi-phase appliances, correct mode of connection considered to be obvious if:		—
	- indicated by arrows pointing towards the terminals, or		N/A
	- marked in words		N/A
	Connection diagram may be the wiring diagram		N/A
7.8	Except for type Z attachment, terminals for connection to the supply mains indicated as follows:		—
	- marking of terminals exclusively for the neutral conductor (letter N)		N/A
	- marking of protective earthing terminals (symbol IEC 60417-5019)		P
	- marking of functional earthing terminals (symbol IEC 60417-5018)		N/A
	- marking not placed on removable parts		P
7.9	Marking or placing of switches which may cause a hazard		P
7.10	Indications of switches on stationary appliances and controls on all appliances by use of figures, letters or other visual means :		P
	This applies also to switches which are part of a control	Figures and letters used	P
	If figures are used, the off position indicated by the figure 0		N/A
	The figure 0 indicates only OFF position, unless no confusion with the OFF position		N/A
	The figure 0 may be used on a digital programming keyboard		N/A
7.11	Indication for direction of adjustment of controls		P
7.12	Instructions for safe use provided in hard copy form		P
	Instructions may be marked on the appliance as long as they are visible in normal use		P
	Details concerning precautions during user maintenance		P
	The instructions the substance of the following:		—
	- the machine is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge (IEC 60335-2-79:2021)		P
	- children should be supervised not to play with the appliance		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	For a part of class III construction supplied from a detachable power supply part, the instructions state that the appliance is only to be used with the unit provided		N/A
	Instructions for class III appliances state that it must only be supplied at SELV, unless		N/A
	it is a battery-operated appliance, the battery being charged outside the appliance		N/A
	For appliances for altitudes exceeding 2 000 m, the maximum altitude is stated :		N/A
	The instructions for appliances incorporating a functional earth state that the appliance incorporates an earth connection for functional purposes		N/A
	The instructions for appliances intended to be connected to a supply for battery recharging state a warning to only use an external supply with the described specifications		N/A
	The instructions for appliances intended to be supplied from a detachable power supply part for battery recharging state the type reference of the supply part along with a warning to only use the unit provided with this appliance		N/A
	The instructions for appliances intended for use with batteries using metal-ion chemistries state the normal temperature range for battery charging		N/A
	Meaning of symbol for detachable power supply part explained, unless not used		N/A
	Front cover of the instructions include the following: (IEC 60335-2-79:2021)		—
	"Warning: Read the instructions before using the machine " (IEC 60335-2-79:2021)		P
	This wording may be replaced by symbols ISO 7000-0434 (2004-01) and ISO 7000-0790 (2004-01) (IEC 60335-2-79:2021)		P
	The instructions for use shall contain at least the following: (IEC 60335-2-79:2021)		—
	– the business name and full address of the manufacturer and, if applicable, his authorized representative; (IEC 60335-2-79:2021)		P
	– designation of the machine and series or type, except for the serial number, allowing the technical identification of the product. (IEC 60335-2-79:2021)		P
	This may be achieved by a combination of letters and/or numbers (IEC 60335-2-79:2021)		N/A
	– the general description of the machine; (IEC 60335-2-79:2021)		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	– the intended use of the machine and the auxiliary equipment as covered by the scope of this standard; (IEC 60335-2-79:2021)		P
	– the intended use of the machine and the auxiliary equipment as covered by the scope of this standard (IEC 60335-2-79:2021)		P
	– the meaning of the symbols used on the machine and in the instructions (IEC 60335-2-79:2021)		P
	– drawings, diagrams, descriptions and explanations necessary for the safe use, maintenance and repair of the machine and for checking its correct functioning (IEC 60335-2-79:2021)		P
	- information regarding putting into service, safe operation, handling, transportation, and storage of the machine taking into account its mass (IEC 60335-2-79:2021)		P
	- instructions to enable adjustment and maintenance to be carried out safely, including the protective measures that should be taken during these operations (IEC 60335-2-79:2021)		P
	– the conditions in which the machine meets the requirement of stability during use, transportation, assembly, dismantling when out of service, testing or foreseeable breakdowns (IEC 60335-2-79:2021)		P
	– the procedure to be followed to prevent unsafe situations in the event of accident or equipment breakdown (IEC 60335-2-79:2021)		P
	The instructions indicate the type and frequency of inspections and maintenance required for safe operation including the preventive maintenance measures (IEC 60335-2-79:2021) and		P
	give the specifications of the spare parts if they affect the health and safety of the operator. (IEC 60335-2-79:2021)		P
	In addition, the instructions give the following information, if applicable: (IEC 60335-2-79:2021)		—
	– information about appropriate personnel protection equipment (PPE) for high pressure cleaners in operation which shall be worn while operating the equipment (IEC 60335-2-79:2021)		P
	– instructions for water jetters given, such as "Insert hose beyond to red mark before turning on the machine" to prevent the operator being hit by the water jet or debris/sewage (IEC 60335-2-79:2021)		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	– adequate information about the connection with the water mains, including the maximum inlet pressure, if not given on the rating plate (IEC 60335-2-79:2021)		P
	– adequate information about the nozzles to be used, the danger of the reaction force and the sudden torque on the spray assembly when operating the trigger gun (IEC 60335-2-79:2021)		P
	- the reaction forces if they exceed 20 N (IEC 60335-2-79:2021)		N/A
	– the functioning of the safety devices, e.g. safety valves, flow switches, pressure switches (IEC 60335-2-79:2021)		P
	– for battery powered machines, the precautions to be taken for safe charging (IEC 60335-2-79:2021)		N/A
	– information regarding safe disposal of batteries (IEC 60335-2-79:2021)		N/A
	– if split rims are used for pneumatic tyres, instructions given for the safe change of tyres (IEC 60335-2-79:2021)		N/A
	- For mains operated machines, the substance of the following: (IEC 60335-2-79:2021)		—
	The electric supply connection is to be made by a qualified electrician and comply with IEC 60364-1 (IEC 60335-2-79:2021)		N/A
	It is recommended that the electric supply to this machine should include either a residual current device that will interrupt the supply if the leakage current to earth exceeds 30 mA for 30 ms or (IEC 60335-2-79:2021)	Included into the machine	N/A
	a device that will prove the earth circuit (IEC 60335-2-79:2021)		N/A
	- For oil fired machines without a primary safety control, the substance of the following: (IEC 60335-2-79:2021)		N/A
	This machine must be attended during operation (IEC 60335-2-79:2021)		N/A
	- For fixed appliances intended to be used in a dry independent room, and for steam cleaners intended for indoor use only, the substance of the following: (IEC 60335-2-79:2021)		P
	Do not splash or wash down (IEC 60335-2-79:2021)		P
	For machines not intended to be connected to the potable water mains, the instructions give the following information, if applicable (IEC 60335-2-79:2021)		—
	– adequate information for the correct connection to the water supply (IEC 60335-2-79:2021)		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	– adequate information about suction operation (IEC 60335-2-79:2021)		N/A
	– necessary length and quality of the water supply hose (IEC 60335-2-79:2021)		N/A
	– necessary measures for conversion of the connection from supply from other water sources to supply from the potable water mains (IEC 60335-2-79:2021)		N/A
7.12.1	Sufficient details for installation supplied		P
	For an appliance intended to be permanently connected to the water mains and not connected by a hose-set, this is stated		N/A
	If different rated voltages or different rated frequencies are marked, the instructions state what action to be taken to adjust the appliance		N/A
7.12.2	Stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III, the instructions state that means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules		N/A
7.12.3	Insulation of the fixed wiring in contact with parts exceeding 50 K during clause 11; instructions state that the fixed wiring must be protected		N/A
7.12.4	Instructions for built-in appliances:		—
	- dimensions of space		N/A
	- dimensions and position of supporting and fixing		N/A
	- minimum distances between parts and surrounding structure		N/A
	- minimum dimensions of ventilating openings and arrangement		N/A
	- connection to supply mains and interconnection of separate components		N/A
	- allow disconnection of the appliance after installation, by accessible plug or a switch in the fixed wiring, unless		N/A
	a switch complying with 24.3		N/A
7.12.5	Replacement cord instructions, type X attachment with a specially prepared cord		N/A
	Replacement cord instructions, type Y attachment		P
	Replacement cord instructions, type Z attachment		N/A
	Replacement cord set instructions, if required according to 22.58		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
7.12.6	Caution in the instructions for appliances incorporating a non-self-resetting thermal cut-out that is reset by disconnection of the supply mains, if this cut-out is required to comply with the standard		N/A
7.12.7	Instructions for fixed appliances stating how the appliance is to be fixed		N/A
7.12.8	Instructions for appliances connected to the water mains:		—
	- max. inlet water pressure (Pa) :	0,4 MPa (4 bar)	P
	- min. inlet water pressure, if necessary (Pa) :		N/A
	Instructions concerning new and old hose-sets for appliances connected to the water mains by detachable hose-sets		N/A
7.12.9	Instructions specified in 7.12 and from 7.12.1 to 7.12.8 are in hard copy form and appear together before any other instructions supplied with the appliance		P
	Alternatively, these instructions may be supplied with the appliance separately from any functional use booklet		P
	They may follow the description of the appliance that identifies parts, or follow the drawings/sketches common to the languages of the instructions		P
	They may follow the description of the appliance that identifies parts, or follow the drawings/sketches		P
	In addition, instructions are also available in an alternative format such as on a website or on request in a format such as a DVD..... :	DVD on request	P
	Instead of hard copy, electronic form can be used if the following conditions are met: (IEC 60335-2-79:2021)		—
	- instructions for unpacking, installation and enabling access to the complete safety instructions on a suitable reading device shall be provided on paper or marked on the machine (IEC 60335-2-79:2021)		N/A
	- the suitable reading device shall be provided with the machine or be necessary to operate the machine, and (IEC 60335-2-79:2021)		N/A
	- the content of the electronic instructions shall be provided with the machine. (IEC 60335-2-79:2021)		N/A
	For non-safety related functional use, the operational manual may be provided in electronic form either: (IEC 60335-2-79:2021)		—
	- on a suitable electronic display incorporated in the appliance, or (IEC 60335-2-79:2021)		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	- on a separate electronic device provided with the appliance, or (IEC 60335-2-79:2021)		N/A
	- from a provided link to a website, where they may be viewed and/or downloaded (IEC 60335-2-79:2021)		N/A
7.12.101	The instructions include warnings concerning ways in which the machine shall not be used, which in the experience of the manufacturer are likely to occur. (IEC 60335-2-79:2021)		P
	At least, they include the substance of the following warnings, if applicable (IEC 60335-2-79:2021)		P
	– WARNING This machine has been designed for use with the cleaning agent supplied or recommended by the manufacturer. The use of other cleaning agents or chemicals may adversely affect the safety of the machine. (IEC 60335-2-79:2021)		P
	– WARNING High pressure jets can be dangerous if subject to misuse. The jet must not be directed at persons, live electrical equipment or the machine itself. (IEC 60335-2-79:2021)		P
	– WARNING During use of high pressure cleaners, aerosols may be formed. Inhalation of aerosols can be hazardous to health. (IEC 60335-2-79:2021)		P
	– WARNING High pressure jets can be dangerous if subject to misuse. The jet must not be directed at persons, live electrical equipment or the machine itself. (IEC 60335-2-79:2021)		P
	– WARNING Do not use the machine within range of persons unless they wear protective clothing (IEC 60335-2-79:2021)		P
	– WARNING Do not direct the jet against yourself or others in order to clean clothes or foot-wear (IEC 60335-2-79:2021)		P
	– WARNING Risk of explosion – Do not spray flammable liquids (IEC 60335-2-79:2021)		P
	– WARNING High pressure cleaners shall not be used by children or untrained personnel (IEC 60335-2-79:2021)		P
	– WARNING High pressure hoses, fittings and couplings are important for the safety of the machine. Use only hoses, fittings and couplings recommended by the manufacturer (IEC 60335-2-79:2021)		P
	– WARNING To ensure machine safety, use only original spare parts from the manufacturer or approved by the manufacturer (IEC 60335-2-79:2021)		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	– WARNING Water that has flowed through backflow preventers is considered to be non-potable (IEC 60335-2-79:2021)		P
	- A warning that the machine has to be disconnected from its power source during cleaning or maintenance and when replacing parts or converting the machine to another function: (IEC 60335-2-79:2021)		P
	•for mains operated machines, by removing the plug from the socket-outlet; (IEC 60335-2-79:2021)		P
	•for battery powered machines, by safely disconnecting at least the B+ or B– pole of the battery or by an equivalent method; (IEC 60335-2-79:2021)		N/A
	for non-SELV both poles must be disconnected. (IEC 60335-2-79:2021)		N/A
	•for internal combustion engine powered machines, by removing the ignition key and by disconnecting the battery (IEC 60335-2-79:2021)		N/A
	– WARNING Do not use the machine if a supply cord or important parts of the machine are damaged, e.g. safety devices, high pressure hoses, trigger gun (IEC 60335-2-79:2021)		P
	– WARNING Inadequate extension cords can be dangerous. If an extension cord is used, it shall be suitable for outdoor use, and the connection has to be kept dry and off the ground. It is recommended that this is accomplished by means of a cord reel which keeps the socket at least 60 mm above the ground (IEC 60335-2-79:2021)		P
	– WARNING Do not use combustion engine powered machines indoors unless adequate ventilation is assessed by a competent person or labour authorities (IEC 60335-2-79:2021)		N/A
	– WARNING Ensure that any exhaust emissions are not in the vicinity of air intakes (IEC 60335-2-79:2021)		P
	– WARNING For gas or oil-heated machines it is important to provide adequate ventilation and make sure that the flue gases are properly discharged (IEC 60335-2-79:2021)		P
	– WARNING Always switch off the mains disconnecting switch when leaving the machine unattended (IEC 60335-2-79:2021)		P
	Instructions for machines where gas or liquid fuel are used also include the specification of the correct fuel and the substance of the following: (IEC 60335-2-79:2021)		—

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	– WARNING Incorrect fuels shall not be used as they may prove hazardous (IEC 60335-2-79:2021)		P
	Instructions for machines having a current-carrying hose, operating at other than safety extra-low voltage, also include the substance of the following: (IEC 60335-2-79:2021)		—
	– WARNING This hose contains electrical connections: do not use it to collect water and do not immerse in water for cleaning. (IEC 60335-2-79:2021)		N/A
	The instructions for machines not intended for commercial use shall include the substance of the following: (IEC 60335-2-79:2021)		—
	– WARNING Depending on the application, shielded nozzles can be used for high pressure cleaning, which will reduce the emission of hydrous aerosols dramatically. However, not all applications allow the use of such a device. If shielded nozzles are not applicable for the protection against aerosols, a respiratory mask of class FFP 2 or equivalent may be needed, depending on the cleaning environment. (IEC 60335-2-79:2021)		N/A
	The instructions for machines intended for commercial use shall include the substance of the following: (IEC 60335-2-79:2021)		—
	– WARNING The employer shall perform a risk assessment in order to specify the necessary protective measures regarding aerosols, depending on the surface to be cleaned and its environment. Respiratory masks of class FFP 2, an equivalent or higher are suitable for the protection against hydrous aerosols. (IEC 60335-2-79:2021)		P
7.12.102	Information on noise (IEC 60335-2-79:2021)		P
7.12.103	Information on vibration (IEC 60335-2-79:2021)		N/A
7.13	Instructions and other texts in an official language		P
	The words "Original instructions" appear on the language version(s) verified by the manufacturer (IEC 60335-2-79:2021)		P
7.14	Markings clearly legible:		—
	Signal words WARNING, CAUTION, DANGER in uppercase having a height as specified :		P
	Uppercase letter of the text explaining the signal word not smaller than 1,6 mm :		P
	Moulded in, engraved, or stamped markings either raised above or have a depth below the surface of at least 0,25 mm, unless		N/A
	contrasting colours are used		N/A
	Markings checked by inspection, measurement and rubbing test as specified		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Markings clearly durable, and on containers that are likely to be cleaned frequently they are not by means of paint or enamel, other than vitreous enamel		P
	The height of symbol IEC 60417-5935 (2012-09) is at least 15 mm (IEC 60335-2-79:2021)		P
7.15	Markings specified in 7.1 to 7.5 on a main part		P
	Marking clearly discernible from the outside, if necessary after removal of a cover		P
	For portable appliances, cover can be removed or opened without a tool		N/A
	For stationary appliances, name, trademark or identification mark and model or type reference visible after installation		N/A
	For fixed appliances, name, trademark or identification mark and model or type reference visible after installation according to the instructions		N/A
	Indications for switches and controls placed on or near the components. Marking not on parts which can be positioned or repositioned in such a way that the marking is misleading		P
	The symbol IEC 60417-5018 placed next to the symbol IEC 60417-5172 or IEC 60417-5180		N/A
	Type reference of detachable power supply part placed next to symbol IEC 60417-6181		N/A
	Marking of outlet load close to appliance outlet or socket-outlet		N/A
7.16	Marking of a possible replaceable thermal link or fuse link clearly visible with regard to replacing the link		N/A
8	PROTECTION AGAINST ACCESS TO LIVE PARTS		
8.1	Adequate protection against accidental contact with live parts		P
	Water and water-borne cleaning agents are considered conductive. (IEC 60335-2-79:2021)		P
8.1.1	Requirement applies for all positions, detachable parts removed unless otherwise specified		P
	Use of test probe B of IEC 61032:		—
	- force not exceeding 1 N: no contact with live parts		P
	- force of 20 N: no contact with live parts		P
	- lamps behind a detachable cover not removed, if conditions met		N/A
	- protection against contact with live parts of the lamp cap during lamp insertion or removal		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Use of test probe 18 of IEC 61032 for non-commercial appliances and commercial appliances intended for public access:		—
	- force not exceeding 1 N: no contact with live parts		P
	- force of 10 N: no contact with live parts		P
	- appliance fully assembled as in normal use, no parts removed		P
	No contact with live parts protected by materials as specified		P
8.1.2	Use of test probe 13 of IEC 61032, with a force not exceeding 1 N, through openings in class 0 appliances and class II appliances/constructions: no contact with live parts		P
	Test probe 13 also applied through openings in earthed metal enclosures having a non-conductive coating: no contact with live parts		N/A
8.1.3	For appliances other than class II, use of test probe 41 of IEC 61032, with a force not exceeding 1 N: no contact with live parts of visible glowing heating elements or supporting parts		P
	For a single switching action obtained by a switching device, requirements as specified		P
	For appliances with a supply cord and without a switching device, the single switching action may be obtained by the withdrawal of the plug		N/A
8.1.4	Accessible part not considered live if:		—
	- safety extra-low AC voltage: peak value not exceeding 42,4 V		N/A
	- safety extra-low DC voltage: not exceeding 42,4 V		N/A
	- or separated from live parts by protective impedance		N/A
	If protective impedance: DC current not exceeding 2 mA, and		N/A
	AC peak value not exceeding 0,7 mA		N/A
	- for peak values over 42,4 V up to and including 450 V, capacitance not exceeding 0,1 µF		N/A
	- for peak values over 450 V up to and including 15 kV, discharge not exceeding 45 µC		N/A
	- for peak values over 15 kV, the energy in the discharge not exceeding 350 mJ		N/A
8.1.5	Live parts protected at least by basic insulation before installation or assembly:		—
	- built-in appliances		N/A
	- fixed appliances		N/A
	- appliances delivered in separate units		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
8.2	Class II appliances and constructions constructed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only		P
	Only possible to touch parts separated from live parts by double or reinforced insulation		P
8.3	For battery-operated appliances with a functional earth or supply connection, parts within a battery compartment only accessible if:		—
	- class I, 0I and II appliances: separated from live parts by double and reinforced insulation		N/A
	- class 0 appliances: separated from live parts by basic insulation		N/A
	- battery compartment of class III construction, and basic insulation in addition to supply at SELV, if limits in 8.1.4 exceeded		N/A
	The test probes are only applied to built-in appliances and fixed appliances after installation		N/A
9	STARTING OF MOTOR-OPERATED APPLIANCES		
	Only possible to start the machine by intended actuation of a control device provided for the purpose. (IEC 60335-2-79:2021)		P
	The same requirement applies when restarting the machine after a stoppage, whatever the cause. (IEC 60335-2-79:2021)		P
10	POWER INPUT AND CURRENT		
10.1	Power input at normal operating temperature, rated voltage and normal operation not deviating from rated power input by more than shown in Table 1 :	(See appended table)	P
	If the power input varies throughout the operating cycle and its maximum value exceeds twice its arithmetic mean value occurring during a representative period, the power input is the maximum value that is exceeded for more than 10 % of the representative period if this value is greater than the arithmetic mean value,		N/A
	otherwise the power input is the arithmetic mean value		N/A
	In case of doubt, the power input of the motors may be measured separately		N/A
	In case of measurement during a representative period, duration of the representative period..... :		N/A
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated power input is related to the arithmetic mean value of the relevant range		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliance outlets accessible to the user and socket-outlets accessible to the user incorporated in appliances connected to the supply mains and operating at rated voltage are not loaded during test,		N/A
	however, their contribution to the power input is considered to be the marked outlet load per appliance outlet or socket-outlet		N/A
10.2	Current at normal operating temperature, rated voltage and normal operation not deviating from rated current by more than shown in Table 2..... :	(See appended table)	N/A
	If the current varies throughout the operating cycle and its maximum value exceeds twice its arithmetic mean value occurring during a representative period, the current is the maximum value that is exceeded for more than 10 % of the representative period if this value is greater than the arithmetic mean value,		N/A
	otherwise the current is the arithmetic mean value		N/A
	In case of doubt, the current of the motors may be measured separately		N/A
	In case of measurement during a representative period, duration of the representative period..... :		N/A
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated current is related to the arithmetic mean value of the relevant range		N/A
	Appliance outlets and socket-outlets accessible to the user incorporated in appliances connected to the supply mains and operating at rated voltage are not loaded during test,		N/A
	however, their contribution to the current is considered to be the marked outlet load per appliance outlet or socket-outlet		N/A
10.101	At normal operation, the pressure does not deviate more than $\pm 10\%$ from the rated pressure. (IEC 60335-2-79:2021)	(See appended table)	P
11	HEATING		
11.1	No excessive temperatures in normal use		P
11.2	The appliance is held, placed or fixed in position as described :		P
11.3	Temperature rises, other than of windings, determined by thermocouples		P
	Temperature rises of windings determined by resistance method, unless		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	the windings are non-uniform or it is difficult to make the necessary connections		N/A
11.4	Electric heating appliances operated under normal operation at 1.15 times rated power input (W) (IEC 60335-2-79:2021)		N/A
11.5	Motor-operated appliances operated under normal operation at most unfavourable voltage between 0,94 and 1,06 times rated voltage (V)		N/A
11.6	Combined appliances operated under normal operation at most unfavourable voltage between 0,94 and 1,06 times rated voltage (V)	1,06 x 230 V = 243,8 V	P
11.7	Operation duration corresponding to the most unfavourable conditions of normal use		P
	Appliance outlets and socket-outlets accessible to the user loaded with a resistive load that gives the marked outlet load		N/A
	For appliances incorporating integral batteries or separable batteries not disconnected from the appliance during charging:		—
	- the fully discharged battery is charged for 1 h, while the appliance is operated continuously performing its intended function		N/A
	- the fully discharged battery is charged for 24 h or until it is fully charged, without the appliance performing its intended function		N/A
	Machines are operated until steady conditions are established (IEC 60335-2-79:2021)		P
11.8	Temperature rises monitored continuously and not exceeding the values in Table 3	(See appended table)	P
	If the temperature rise of a motor winding exceeds the value of Table 3, or		P
	if there is doubt with regard to classification of insulation,		N/A
	tests of Annex C are carried out		N/A
	Sealing compound does not flow out		P
	Protective devices do not operate, except		P
	components in protective electronic circuits tested for the number of cycles specified in 24.1.4		N/A
11.101	The max. temperature of flue gases not exceeding 400°C (IEC 60335-2-79:2021)		P
	The amount of smoke in the flue gasses does not exceed (IEC 60335-2-79:2021):		—
	- for atomizing and wall burners, that corresponding to a No. 2 Shell-Bacharach smoke spot (IEC 60335-2-79:2021)		N/V

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	- for vaporizing burners, that corresponding to a No. 2 Shell-Bacharach smoke spot (IEC 60335-2-79:2021)		N/V
	Amount of CO in the flue gases shall not exceed 0,04 % (volume) on an air-free and dry basis : (IEC 60335-2-79:2021)		N/V
11.102	Hoses, spray lances and fittings containing the cleaning agent do not exceed the rated temperature (IEC 60335-2-79:2021)		P
11.103	Adequate protection against unintentional contact of hot metal parts by the user. (IEC 60335-2-79:2021)		P
	The protection means shall be considered as an external enclosure. (IEC 60335-2-79:2021)		P
11.104	Liquid fuel: fuel temperature in the tank shall not exceed a temperature of 10 °C below the flash point, if there is a source of ignition in contact with the air/fuel mixture (IEC 60335-2-79:2021)		N/A
12	CHARGING OF METAL-ION BATTERIES		
	Charging a battery that uses metal-ion chemistry does not cause any cell to exceed its operating region for charging		N/A
	Fully discharged battery is charged with the charging system indicated in the instructions at an ambient temperature of 20 °C ± 5 °C		N/A
	Test repeated at:		—
	- minimum ambient temperature, if specified to be less than 10 °C by the manufacturer (°C)..... :		N/A
	- at maximum ambient temperature, if specified to be greater than 40 °C by the manufacturer (°C) .. :		N/A
	For all individual cells, the voltage, temperature and charging current are monitored :	(See appended table)	N/A
	For parallel configuration, analysis may be used to avoid measuring the individual branch currents,		N/A
	the test result not exceeding the specified operating region for charging		N/A
	Location of thermocouples for each cell temperature measurement on the outer surface, halfway along the longest dimension of the cell		N/A
	For each cell, the specified operating region for charging specified by the cell manufacturer is not exceeded at the temperature of the cell		N/A
	For batteries where cells are configured in series, the test is repeated with the charge in one battery deliberately imbalanced, the imbalance being introduced into a fully discharged battery by charging one cell to:		—
	- approximately 50 % of its full charge, or		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	- less than 50 % of its full charge, if it can be demonstrated as specified that this would occur in normal operation		N/A
13	LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE		
13.1	Leakage current not excessive and electric strength adequate		P
	Heating appliances operated at 1,15 times the rated power input (W)		N/A
	Motor-operated appliances and combined appliances supplied at 1,06 times the rated voltage (V)	1,06 x 230 V = 243,8 V	P
	Protective impedance and radio interference filters disconnected before carrying out the tests		P
13.2	The leakage current is measured by means of the circuit described in Figure 4 of IEC 60990:2016		P
	For class 0I appliances and class I appliances, except parts of class II construction, C may be replaced by a low impedance ammeter		P
	Leakage current measurements	(See appended table)	P
13.3	The appliance is disconnected from the supply		P
	Electric strength tests according to Table 4	(See appended table)	P
	No breakdown during the tests		P
14	TRANSIENT OVERVOLTAGES		
	Appliances withstand the transient over-voltages to which they may be subjected		N/A
	Clearances having a value less than specified in Table 16 subjected to an impulse voltage test, the test voltage specified in Table 6	(See appended table)	N/A
	No flashover during the test, unless		N/A
	of functional insulation if the appliance complies with clause 19 with the clearance short-circuited		N/A
15	MOISTURE RESISTANCE		
15.1	Enclosure provides the degree of moisture protection according to classification of the appliance		P
	Compliance checked as specified in 15.1.1, taking into account 15.1.2, followed by the electric strength test of 16.3		P
	No trace of water on insulation which can result in a reduction of clearances or creepage distances below values specified in clause 29		P
	No water in the enclosure of appliances and parts of appliances with pins for insertion into socket-outlets		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
15.1.1	Appliances, other than IPX0, subjected to tests as specified in IEC 60529:1989 including IEC 60529:1989/AMD1:1999 and IEC 60529:1989/AMD2:2013..... :		P
	Water valves containing live parts in external hoses for connection of an appliance to the water mains tested as specified for IPX7 appliances		N/A
15.1.2	Hand-held appliances turned continuously through the most unfavourable positions during the test		N/A
	Appliances with an automatic cord reel are tested according to 15.1.1 with the supply cord unreel, coiled and reel again as specified, and		N/A
	for fixed appliances mounted on the wall or ceiling, the cord is dropped from the minimum height as specified in the instructions before being coiled		N/A
	Built-in appliances installed according to the instructions		N/A
	Appliances placed or used on the floor or table placed on a horizontal unperforated support		P
	Appliances normally fixed to a wall are mounted on a wooden board		N/A
	Appliances and parts of appliances with integral pins for insertion into socket-outlets are held by the pins in the most unfavourable position without being mounted in a socket-outlet		N/A
	For IPX3 appliances, the base of wall mounted appliances is placed at the same level as the pivot axis of the oscillating tube		N/A
	For IPX4 appliances, the horizontal centre line of the appliance is aligned with the pivot axis of the oscillating tube, and		P
	for appliances normally used on the floor or table, the movement is limited to two times 90° for a period of 5 min, the support being placed at the level of the pivot axis of the oscillating tube		P
	Wall-mounted appliances with the distance to the floor stated in the instructions are tested with a board placed accordingly under the appliance		N/A
	Appliances normally fixed to a ceiling are mounted underneath a horizontal unperforated support, the pivot axis of the oscillating tube located at the level of the underside of the support, and		N/A
	for IPX4 appliances, the movement of the tube is limited to two times 90° from the vertical for a period of 5 min		N/A
	Appliances with type X attachment fitted with a flexible cord as described, unless		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	having a specially prepared cord		N/A
	Detachable parts removed and subjected to the relevant treatment with the main part, however		p
	not removed if the instructions state that the part must be removed for user maintenance and a tool is needed		P
15.2	All machines are constructed so that does not affect their electrical insulation (IEC 60335-2-79:2021):		—
	– spillage of liquid due to normal operation, (IEC 60335-2-79:2021)		P
	– filling including overfilling (IEC 60335-2-79:2021) and		P
	– overturning of hand-guided machines, hand-held appliances and unstable machines (IEC 60335-2-79:2021)		N/A
	Tanks for the following liquids are excluded from the tests (IEC 60335-2-79:2021):		—
	– hydraulic oil (IEC 60335-2-79:2021)		N/A
	– coolant (IEC 60335-2-79:2021)		N/A
	– fuel (diesel, gasoline, LPG) (IEC 60335-2-79:2021)		P
	Compliance is checked as described: (IEC 60335-2-79:2021)		P
	After each of these tests, the machine shall withstand the electric strength test of 16.3 (IEC 60335-2-79:2021)		P
	No trace of liquid on insulation that reduces the clearances or creepage distances below the values specified in Clause 29. (IEC 60335-2-79:2021)		P
15.3	Appliances proof against humid conditions		P
	Checked by test Cab: The relative humidity shall be $(93 \pm 6) \%$. (IEC 60335-2-79:2021)		P
	Cable entries, if any, left open		P
	If knock-outs provided, one of them opened		P
	Detachable parts removed and subjected, if necessary, to the humidity test with the main part		P
	Humidity test for 48 h in a humidity cabinet		P
	Reassembly of those parts that may have been removed		P
	The appliance withstands the tests of clause 16		p

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
15.101	Motorized cleaning heads resistant to liquids that may come into contact with them (IEC 60335-2-79:2021)		N/A
	The following test is not applicable to motorized cleaning heads of class III construction having a working voltage up to 24 V. (IEC 60335-2-79:2021)		N/A
	Compliance is checked by the test as specified (IEC 60335-2-79:2021)		N/A
16	LEAKAGE CURRENT AND ELECTRIC STRENGTH		
16.1	Leakage current not excessive and electric strength adequate		P
	Protective impedance disconnected from live parts before carrying out the tests		N/A
	Tests carried out at room temperature and not connected to the supply		P
16.2	Single-phase appliances: test voltage 1,06 times rated voltage (V)	1,06 x 230 = 243,8 V	P
	Three-phase appliances: test voltage 1,06 times rated voltage divided by $\sqrt{3}$ (V)		N/A
	Leakage current measurements	(See appended table)	P
	Limit values doubled if:		—
	- all controls have an off position in all poles, or		N/A
	- the appliance has no control other than a thermal cut-out, or		N/A
	- all thermostats, temperature limiters and energy regulators do not have an off position, or		N/A
	- the appliance has radio interference filters		P
	With the radio interference filters disconnected, the leakage current does not exceed limits specified. :	(See appended table)	P
16.3	Electric strength tests according to Table 7	(See appended table)	P
	Test voltage applied between the supply cord and inlet bushing and cord guard and cord anchorage as specified	(See appended table)	P
	No breakdown during the tests		P
17	OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS		
	No excessive temperatures in transformer or associated circuits in event of short-circuits likely to occur in normal use	(See appended table)	P
	Appliance supplied with 1,06 or 0,94 times rated voltage under the most unfavourable short-circuit or overload likely to occur in normal use (V)	243,8 V	P
	Basic insulation is not short-circuited		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Temperature rise of insulation of the conductors of safety extra-low voltage circuits not exceeding the relevant value specified in Table 3 by more than 15 K	Secondary output of printed board transformer protected by a delay fuse (rated current: 0,8 A). No possible overheating	P
	Temperature of the winding not exceeding the value specified in Table 8		P
	However, limits do not apply to fail-safe transformers complying with subclause 15.5 of IEC 61558-1:2017		N/A
18	ENDURANCE		
18.101	The insulation, contacts and connections not damaged and do not work loose, as result of heating, vibration, etc. (IEC 60335-2-79:2021)		N/A
	For motor-operated appliances, compliance is checked by the tests of 18.102 and 18.106 (IEC 60335-2-79:2021) and		N/A
	by the additional tests of 18.103 to 18.105 as are applicable (IEC 60335-2-79:2021)		N/A
	During the tests of 18.102 and 18.103, overload protective devices and safety valves shall not operate. (IEC 60335-2-79:2021)		N/A
18.102	Machine is operated under normal operation and at rated voltage for 96 h, reduced by the running time for the tests of Cl. 11 and 13 (IEC 60335-2-79:2021)		N/A
	Machines are operated continuously, or for a corresponding number of periods, each period being not less than 8 h. (IEC 60335-2-79:2021)		N/A
	The specified operating time is the actual running time. (IEC 60335-2-79:2021)		N/A
	If the machine incorporates more than one motor, the operating times specified apply to each motor separately. (IEC 60335-2-79:2021)		N/A
	The test carried out with a cleaning agent that has not been heated. (IEC 60335-2-79:2021)		N/A
	All hose lines are coiled on concrete during this test. (IEC 60335-2-79:2021)		N/A
18.103	Machines are started under normal operation; (IEC 60335-2-79:2021)		N/A
	50 starts at 1,1 times rated voltage for not less than 10 s (IEC 60335-2-79:2021) and		N/A
	50 starts at 0,85 times rated voltage for not less than 10 s (IEC 60335-2-79:2021)		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
18.104	Machines provided with a centrifugal or other automatic starting switch are started 10 000 times under normal operation and at a voltage equal to 0,9 times the rated voltage, the operating cycle being that specified in 18.103. (IEC 60335-2-79:2021)		N/A
	Forced cooling may be used, if necessary. (IEC 60335-2-79:2021)		N/A
18.105	Appliances provided with self-resetting thermal cut-outs shall work reliably under overvoltage conditions. (IEC 60335-2-79:2021)		N/A
	The machine is supplied at a voltage equal to 1,1 times the rated voltage, under such a load as will cause the thermal cut-out to operate within a few minutes, until the thermal cut-out has performed 200 cycles of operation. (IEC 60335-2-79:2021)		N/A
18.106	After tests of 18.102 to 18.105, the appliance withstands tests of Cl. 16 (IEC 60335-2-79:2021)		N/A
	Connections, handles, guards, brush-caps and other fittings or components have not worked loose (IEC 60335-2-79:2021)		N/A
	Safety in normal use not impaired (IEC 60335-2-79:2021)		N/A
19	ABNORMAL OPERATION		
19.1	The risk of fire, mechanical damage or electric shock under abnormal or careless operation obviated		P
	Electronic circuits so designed and applied that a fault will not render the appliance unsafe :	(See appended table)	N/V
	Appliances incorporating heating elements subjected to the tests of 19.2 and 19.3, and	Considered for air pre-heater	P
	if the appliance also has a control that limits the temperature during clause 11 it is subjected to the test of 19.4, and		P
	if applicable, to the test of 19.5		N/A
	Appliances incorporating PTC heating elements are also subjected to the test of 19.6		N/A
	Appliances incorporating motors subjected to the tests of 19.7 to 19.10, as applicable		P
	The test of 19.7 is not applicable to the pump motor of three-phase machines (IEC 60335-2-79:2021)		N/A
	Machines with appliance outlets complying with the standard sheets in IEC 60320-3 and socket outlets are subject ed to the test of 19. 104 (IEC 60335-2-79:2021)		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances incorporating electronic circuits subjected to the tests of 19.11 and 19.12, as applicable		N/V
	Appliances incorporating contactors or relays subjected to the test of 19.14, being carried out before the tests of 19.11		N/A
	Appliances incorporating voltage selector switches subjected to the test of 19.15		N/A
	Appliances having a mains connection and replaceable batteries subjected to the test of 19.16		N/A
	Appliances incorporating rechargeable batteries that use metal-ion chemistries subjected to the test of 19.17		N/A
	Unless otherwise specified, the tests are continued until a non-self-resetting thermal cut-out operates, or		P
	until steady conditions are established		P
	If a heating element or an intentionally weak part becomes open-circuited, the relevant test is repeated on a second sample, and		N/A
	that same part on the second sample does also become permanently open-circuited in the second test,		N/A
	unless a non-self-resetting thermal cut-out operates or steady conditions are established		N/A
19.2	Test of appliances with heating elements with restricted heat dissipation; test voltage (V), power input of 0,85 times rated power input (W) :	$0,85 \times 110 = 93,5 \text{ W}$	P
19.3	Test of 19.2 repeated; test voltage (V), power input of 1,24 times rated power input (W) :	$1,24 \times 110 = 136,4 \text{ W}$	P
19.4	Test conditions as in clause 11, any control limiting the temperature during tests of clause 11 short-circuited		P
19.5	Test of 19.4 repeated on class 0I and I appliances with tubular sheathed or embedded heating elements. No short-circuiting, but one end of the element connected to the sheath	No tubular sheathed or embedded heating elements	N/A
	The test repeated with reversed polarity and the other end of the heating element connected to the sheath		N/A
	The test is not carried out on appliances intended to be permanently connected to fixed wiring or on appliances where an all-pole disconnection occurs during the test of 19.4 (IEC 60335-2-79:2021)		N/A
19.6	Appliances with PTC heating elements tested at rated voltage, establishing steady conditions		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	The working voltage of the PTC heating element is increased by 5 % and the appliance is operated until steady conditions are re-established. The voltage is then increased in similar steps until 1,5 times working voltage or until the PTC heating element ruptures (V) :		N/A
19.7	Stalling test by locking the rotor if the locked rotor torque is smaller than the full load torque, or	Motor fans separately approved	P
	locking moving parts of other appliances		N/A
	Locked rotor, capacitors open-circuited one at a time		P
	Test repeated with capacitors short-circuited one at a time, unless		P
	the capacitor is of class S2 or S3 of IEC 60252-1:2010 including IEC 60252-1:2010/AMD1:2013		N/A
	Appliances with timer or programmer supplied with rated voltage for each of the tests, for a period equal to the maximum period allowed :		N/A
	An electronic timer or programmer that operates to ensure compliance with the test before the maximum period under the conditions of Clause 11 is reached, is a protective electronic circuit		N/A
	Other appliances supplied with rated voltage for a period as specified..... :	5 minutes	P
	Winding temperatures not exceeding values specified in Table 8..... :	(See appended table)	P
	Motorized cleaning heads are tested with the rotating brush or similar device locked for 30 s (IEC 60335-2-79:2021)		N/A
19.8	Multi-phase motors operated at rated voltage with one phase disconnected		N/A
19.9	Running overload test on appliances incorporating motors intended to be remotely or automatically controlled or liable to be operated continuously		N/A
	Motor-operated and combined appliances for which 30.2.3 is applicable and that use overload protective devices relying on electronic circuits to protect the motor windings, are also subjected to the test		N/A
	Winding temperatures not exceeding values as specified..... :	(See appended table)	N/A
19.10	Series motor operated at 1,3 times rated voltage for 1 min (V) :		N/A
	During the test, parts not being ejected from the appliance		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
19.11	Electronic circuits, compliance checked by evaluation of the fault conditions specified in 19.11.2 for all circuits or parts of circuits, unless	Not verified according to the manufacturer since electric schemes for printed boards were not provided	N/V
	they comply with the conditions specified in 19.11.1		N/V
	Appliances incorporating an electronic circuit that relies upon a programmable component to function correctly, subjected to the test of 19.11.4.8, unless		N/V
	restarting does not result in a hazard		N/V
	Appliances having a device with an off position obtained by electronic disconnection, or a device placing the appliance in a stand-by mode, subjected to the tests of 19.11.4		N/V
	If the safety of the appliance under any of the fault conditions depends on the operation of a miniature fuse-link complying with IEC 60127, the test of 19.12 is carried out		N/V
	During and after each test the following is checked:		—
	- the temperature of the windings does not exceed the values specified in Table 8		N/V
	- the appliance complies with the conditions specified in 19.13		N/V
	- any current flowing through protective impedance not exceeding the limits specified in 8.1.4		N/V
	If a conductor of a printed board becomes open-circuited, the appliance is considered to have withstood the particular test, provided both of the following conditions are met:		—
	- the base material of the printed circuit board withstands the test of normative Annex E		N/V
	- any loosened conductor does not reduce clearance or creepage distances between live parts and accessible metal parts below the values specified in clause 29		N/V
19.11.1	Fault conditions a) to g) in 19.11.2 are not applied to circuits or parts of circuits meeting both of the following conditions:		—
	- the electronic circuit is a low-power circuit, that is, the maximum power at low-power points does not exceed 15 W according to the tests specified		N/V
	- the protection against electric shock, fire hazard, mechanical hazard or dangerous malfunction of other parts of the appliance does not rely on the correct functioning of the electronic circuit		N/V
19.11.2	Fault conditions applied one at a time, the appliance operating under conditions specified in clause 11, but supplied at rated voltage, duration of the tests as specified:		—

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	a) short circuit of functional insulation if clearances or creepage distances are less than the values specified in clause 29		N/V
	b) open circuit at the terminals of any component		N/V
	c) short circuit of capacitors, unless		N/V
	they comply with IEC 60384-14:2013 including IEC 60384-14:2013/AMD:2016		N/V
	d) short circuit of any two terminals of an electronic component, other than integrated circuits		N/V
	This fault condition is not applied between the two circuits of an optocoupler		N/V
	e) failure of triacs in the diode mode		N/V
	f) failure of microprocessors and integrated circuits		N/V
	g) failure of an electronic power switching device		N/V
	Each low power circuit is short-circuited by connecting the low-power point to the pole of the supply source from which the measurements were made		N/V
	Any cord between a battery-operated appliance consuming more than 15 W and the detachable power supply part short-circuited as specified		N/V
	Contactors complying with the relevant IEC standard not open-circuited or short-circuited, provided the appropriate standard covers the conditions that occur with the machine (IEC 60335-2-79:2021)		N/V
	However, locking in the ON-position of the main contacts of a contactor intended for switching on and off the electrical heating element(s) in normal use is considered to be a fault condition (IEC 60335-2-79:2021) unless		N/V
	the machine is provided with at least two sets of contacts connected in series (IEC 60335-2-79:2021)		N/V
	This condition is, for example, achieved by providing two contactors operating independently of each other (IEC 60335-2-79:2021) or		N/V
	by providing one contactor having two independent armatures operating two independent sets of main contacts (IEC 60335-2-79:2021)		N/V
19.11.3	If the appliance incorporates a protective electronic circuit that operates to ensure compliance with clause 19, the appliance is tested as specified		N/V
19.11.4	Appliances having a device with an off position obtained by electronic disconnection, or	No dangerous malfunction	N/A
	a device that can be placed in the stand-by mode,		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	subjected to the tests of 19.11.4.1 to 19.11.4.7, the device being set in the off position or in the stand-by mode		N/A
	Appliances incorporating a protective electronic circuit subjected to the tests of 19.11.4.1 to 19.11.4.7, the tests being carried out after the protective electronic circuit has operated as specified, however		N/A
	tests of electromagnetic phenomena not applied to protective electronic circuits operating during 19.7 in appliances that are used while attended		N/A
	Surge protective devices disconnected, unless		N/A
	they incorporate spark gaps		N/A
19.11.4.1	The appliance is subjected to electrostatic discharges in accordance with IEC 61000-4-2, test level 4		N/A
19.11.4.2	The appliance is subjected to radiated fields in accordance with IEC 61000-4-3, at frequency ranges as specified		N/A
19.11.4.3	The appliance is subjected to fast transient bursts in accordance with IEC 61000-4-4, test level 3 or 4 as specified		N/A
19.11.4.4	The power supply terminals of the appliance subjected to voltage surges in accordance with IEC 61000-4-5 as specified		N/A
	An open circuit test voltage of 2 kV is applicable for the line-to-line coupling mode		N/A
	An open circuit test voltage of 4 kV is applicable for the line-to-earth coupling mode		N/A
	Earthed heating elements in class I appliances disconnected		N/A
	For appliances having surge arresters incorporating spark gaps, tests repeated at 95 % of the flashover voltage		N/A
19.11.4.5	The appliance is subjected to injected currents in accordance with IEC 61000-4-6, test level 3		N/A
19.11.4.6	Appliances having a rated current not exceeding 16 A are subjected to the class 3 voltage dips and interruptions in accordance with IEC 61000-4-11:2020		N/A
	Appliances having a rated current exceeding 16 A are subjected to the class 3 voltage dips and interruptions in accordance with IEC 61000-4-34:2005 including IEC 61000-4-34:2005/AMD1:2009		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
19.11.4.7	The appliance is subjected to mains signals in accordance with IEC 61000-4-13:2002 including IEC 61000-4-13:2002/AMD1:2009 and IEC 61000-4-13:2002/AMD2:2015, test level class 2		N/A
19.11.4.8	The appliance is supplied at rated voltage and operated under normal operation. After 60 s the power supply is reduced to a level such that the appliance ceases to respond or parts controlled by the programmable component cease to operate		N/A
	The appliance continues to operate normally, or		N/A
	requires a manual operation to restart		N/A
19.12	If the safety of the appliance for any of the fault conditions specified in 19.11.2 depends on the operation of a miniature fuse-link complying with IEC 60127, the test is repeated, measuring the current flowing through the fuse-link; measured current (A); current rating of the fuse-link (A) :		N/V
19.13	During the tests the appliance does not emit flames, molten metal, poisonous or ignitable gas in hazardous amounts		P
	Temperature rises not exceeding the values shown in table 9 :	(See appended table)	P
	Compliance with clause 8 not impaired		P
	If the appliance can still be operated, it complies with 20.2		N/A
	Insulation, other than of class III appliances or class III constructions that do not contain live parts, withstands the electric strength test of 16.3, the test voltage as specified in Table 4:		—
	- basic insulation (V) :	1228	P
	- supplementary insulation (V) :		N/A
	- reinforced insulation (V) :	3000	P
	After operation or interruption of a control, clearances and creepage distances across the functional insulation withstand the electric strength test of 16.3, the test voltage being twice the working voltage		P
	The appliance does not undergo a dangerous malfunction, and		P
	no failure of protective electronic circuits, if the appliance is still operable		P
	For accessible safety extra-low voltage outlets, connectors, or USB outlets, no increase of the no-load output voltage by more than 3 V or 10 % of the voltage in normal use, whichever higher, with a maximum/peak of 42,4 VDC/VAC		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances tested with an electronic switch in the off position, or in the stand-by mode:		
	- do not become operational, or		N/A
	- if they become operational, do not result in a dangerous malfunction during or after the tests of 19.11.4	No possible dangerous malfunction	P
	If the appliance contains lids or doors that are controlled by one or more interlocks, one of the interlocks may be released provided that both:		—
	- the lid or door does not move automatically to an open position when the interlock is released, and		N/A
	- the appliance does not start after the cycle in which the interlock was released		N/A
19.14	Appliances operated under the conditions of clause 11, any contactor or relay contact operating under the conditions of clause 11 being short-circuited		N/A
	For a relay or contactor with more than one contact, all contacts are short-circuited at the same time		N/A
	A relay or contactor operating only to ensure the appliance is energized for normal use is not short-circuited		N/A
	If more than one relay or contactor operates in clause 11, they are short-circuited in turn		N/A
	If the appliance has several modes of operation, the tests are carried out with the appliance operating in each mode, if necessary		N/A
19.15	For appliances with a mains voltage selector switch, the switch is set to the lowest rated voltage position and the highest value of rated voltage is applied		N/A
19.16	Appliances having mains connection and replaceable batteries supplied at rated voltage and operated under normal operation but with batteries removed or in any position allowed by construction		N/A
19.17	For battery-operated appliances incorporating a battery using metal-ion chemistry, the battery system is operated according to the instructions and tested under the following conditions, duration as specified:		—
	a) series configured battery:		N/A
	- imbalance introduced into fully discharged battery by charging one cell to the percentage of being fully charged applied during the test of Clause 12;		N/A
	- single cell or parallel only configured battery: fully discharged		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	b) series configured battery: imbalance introduced as specified and fully charged, if the test of clause 12 was conducted with an imbalance of less than 50 % and if a single fault in the circuitry results in the loss of maintaining balance		N/A
	c) series configured battery: cells at 50 % of full charge, except one which is shortened, battery then fully charged		N/A
	d) fully charged battery connected to the charging system: short circuit introduced to the charging system as specified to produce the most unfavourable results, and for a charging system with a cord connecting to the battery, short circuit introduced at a point producing the most adverse effects; resistance of short circuit not exceeding 10 m Ω		N/A
	No explosion or ignition of the battery during or after the test		N/A
	Voltage on any cell not exceeding upper limit charging voltage by more than 150 mV, unless		N/A
	charging system permanently disabled from recharging battery, checked as specified		N/A
	Recharging considered to be permanently disabled, if:		—
	- battery discharged to approximately 50 % of full charge, by using the battery-operated appliance tested (in case of an integral battery), or		N/A
	by using a new sample of the battery-operated appliance (in case of a detachable and separable battery)		N/A
	- attempt made to recharge battery normally		N/A
	- no charging current after 10 min or after 25 % of the nominal capacity has been delivered, whichever occurs first		N/A
19.101	For oil-fired and fan-assisted gas-fired appliances (IEC 60335-2-79:2021):		—
	When the combustion air supply to a machine having fan-assisted draught is partially or completely blocked, the machine either continues to operate safely or the fuel supply is shut off. (IEC 60335-2-79:2021)		N/V
	Compliance is checked by applying 11.101 under the test conditions specified in 19.101.1 and 19.101.2 (IEC 60335-2-79:2021)		N/V
19.101.1	The exhaust flue is blocked with a flat metal plate of sufficient area to cover the entire aperture. (IEC 60335-2-79:2021)		N/V
	It is placed in the most disadvantageous way on top of the flue. (IEC 60335-2-79:2021)		N/V

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
19.101.2	With the machine under normal operation, the combustion air intake is restricted. (IEC 60335-2-79:2021)		N/V
	The air intake to the burner assembly is blocked by means of an adequately sized terry-towel introduced with a force not exceeding 1 N. (IEC 60335-2-79:2021)		N/V
19.102	For atmospheric gas-fired appliances (IEC 60335-2-79:2021):		—
19.102.1	With the outlet of the draught hood blocked, the concentration of carbon monoxide in an air-free sample of the flue gases shall not exceed 0,04 %. (IEC 60335-2-79:2021)		N/V
	Compliance is checked by inspection and as described; CO (%) (IEC 60335-2-79:2021)		N/V
19.102.2	Total downdraught pressures ranging from 0 Pa to 13 Pa imposed at the outlet of the draught hood shall not extinguish the main burner flames nor cause them to flash back, lift, float or burn outside the machine, nor produce a concentration of carbon monoxide in an air-free sample of the flue gases in excess of 0,04 %. (IEC 60335-2-79:2021)		N/V
	Compliance is checked as described; CO (%) : (IEC 60335-2-79:2021)		N/V
19.102.3	Downdraughts imposed as stated for the main burner shall not extinguish the pilot burner flames nor cause them to flash back when they are operated separately from the main burner(s). (IEC 60335-2-79:2021)		N/V
	The construction of a machine equipped with a power burner or operating under forced or induced draught shall be such that its performance is not impaired by chimney draughts or chimney stoppage. (IEC 60335-2-79:2021)		N/V
	With the flue outlet or outlet of the draught diverting device, if one is provided, blocked to any degree up to and including complete closure, the concentration of carbon monoxide in an air-free sample of the flue gases shall not exceed 0,04 %. (IEC 60335-2-79:2021)		N/V
	Compliance is checked as described; CO (%) (IEC 60335-2-79:2021)		N/V
	In case outage occurs, raw gas shall not be forced into the combustion chamber on reopening of the flue outlet. (IEC 60335-2-79:2021)		N/V

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
19.102.4	Total downdraught pressures ranging from 0 Pa to 13 Pa imposed at the flue outlet or outlet of the draught diverting device, if provided, shall not extinguish the main burner flames nor cause them to flash back, lift, float, burn outside the machine, nor produce a concentration of carbon monoxide in an air-free sample of the flue gases in excess of 0,04 %. (IEC 60335-2-79:2021)		N/V
	Compliance is checked as described; CO (%) (IEC 60335-2-79:2021)..... :		N/V
19.103	The machine shall be able to start with a successful ignition even under undervoltage condition, if applicable. (IEC 60335-2-79:2021)		N/V
19.104	Machines with appliance outlets, complying with the standard sheets in IEC 60320-3 and socket outlets shall be operated under conditions of normal operation (IEC 60335-2-79:2021) except		N/A
	the appliance outlet or socket outlet is loaded with the maximum food corresponding to its configuration in accordance with IEC 60320-3 or IEC TR 6008F (IEC 60335-2-79:2021)		N/A
	Machines with more than one appliance outlet or socket outlet are tested with each outlet loaded one at the time (IEC 60335-2-79:2021)		N/A
	However, this test is not applied for appliances with appliance outlets or socket outlets: (IEC 60335-2-79:2021)		—
	- intended only to supply accessories supplied with the machine (IEC 60335-2-79:2021) or		N/A
	- inaccessible to the user, (IEC 60335-2-79:2021) or		N/A
	- provided with a protective device as specified in 22.61 (IEC 60335-2-79:2021)		N/A
20	STABILITY AND MECHANICAL HAZARDS		
20.1	Machines, other than fixed appliances, hand-held appliances and hand-guided machines without a fixed upright parking position of the handle, intended to be used on a surface such as the floor or a table, have adequate stability. (IEC 60335-2-79:2021)		P
	Tilting test through an angle of 10°, appliance placed on an inclined plane/horizontal support, not connected to the supply mains; appliance does not overturn		P
	Tilting test repeated on appliances with heating elements, angle of inclination increased to 15°		P
	Possible heating test in overturned position; temperature rise does not exceed values shown in Table 9		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
20.2	Moving parts adequately arranged or enclosed as to provide protection against personal injury		P
	Protective enclosures, guards and similar parts are non-detachable, and		P
	have adequate mechanical strength		P
	Enclosures that can be opened by overriding an interlock are considered to be detachable parts		P
	Self-resetting thermal cut-outs and overcurrent protective devices not causing a hazard by unexpected closure		P
	Not possible to touch dangerous moving parts with the test probes, checked by:		—
	- inspection		P
	- test of 21.1		N/A
	- applying a force not exceeding 5 N by means of a test probe similar to test probe B of IEC 61032 but having a circular stop face with a diameter of 50 mm, instead of the noncircular face		N/A
	- applying test probe 18 of IEC 61032 with a force not exceeding 2,5 N, if appliance intended for non-commercial use or to be installed in an area open to the public		N/A
20.101	Pumps, pipes, hoses, hose connectors, couplers, seals, valves and other components withstand any mechanical, chemical or thermal stress (IEC 60335-2-79:2021)		P
	Compliance is checked as described (IEC 60335-2-79:2021)		P
20.102	Appliances with water heaters: appliance equipped with safety devices that do not allow the temperature to exceed the rated temperature + 20 K or the permissible pressure to be exceeded (IEC 60335-2-79:2021)	Permissible pressure: 2,0 MPa, while pressure relief device opens at 1,8 MPa; Rated temperature: 260 °C, while self resetting thermal cut-out does not allow the temperature to exceed 237,7 °C	P
20.103	Oil or gas heated machines have primary safety control (IEC 60335-2-79:2021) unless	Optical sensor	P
	they are oil-fired, portable (IEC 60335-2-79:2021) and unless	Stationary appliance	N/A
	there is re-ignition during operation by a continuous ignition device. (IEC 60335-2-79:2021)		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
20.104	Injury due to unintentional closing or slamming or parts, such as movable side walls and covers, is prevented (IEC 60335-2-79:2021)		N/A
	Wheels or rollers for the transport of appliances heavier than 20 kg are located or protected so that injury to the feet of the operator is prevented (IEC 60335-2-79:2021)		P
21	MECHANICAL STRENGTH		
21.1	Machines and their components and fittings have adequate mechanical strength and constructed to withstand such rough handling that may be expected in normal use, during transportation, assembly, dismantling, scrapping and any other action involving the machine. (IEC 60335-2-79:2021)		P
	Checked by applying 3 blows to every point of the enclosure like to be weak, in accordance with test Ehb of IEC 60068-2-75, spring hammer test, with an impact energy of 1,0 J $\pm$ 0,04 J. (IEC 60335-2-79:2021)	(See appended table)	P
	Appliances and parts of appliances having pins for insertion into mains socket-outlets subjected to the test, Free fall repeated, procedure 2, of IEC 60068-2-31, under the specified conditions		N/A
	The appliance shows no damage impairing compliance with this standard, and		P
	compliance with 8.1, 15.1 and clause 29 not impaired		P
	If doubt, supplementary or reinforced insulation subjected to the electric strength test of 16.3		N/A
	If necessary, repetition of groups of three blows on a new sample		N/A
21.2	Accessible parts of solid insulation having strength to prevent penetration by sharp implements		N/A
	Test not applicable if the thickness of supplementary insulation is at least 1 mm and reinforced insulation at least 2 mm		P
	The insulation is tested as specified, and does withstand the electric strength test of 16.3		N/A
21.3	Appliances with pins for insertion into socket-outlets with a rotating plug part are provided with a mechanical stop to prevent rotation having adequate mechanical strength and constructed to withstand rough handling		N/A
	Application of a torque of 2 Nm for 1 min does not result in rotation of the plug part after rotating it until the mechanical stop prevents further rotation, both directions checked		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
21.101	Parts subjected to the hydraulic pressure shall be of sufficient mechanical strength (IEC 60335-2-79:2021)		P
21.101.1	Pressure tests (IEC 60335-2-79:2021):		—
	High pressure system: 2 times the rated pressure for 5 min (IEC 60335-2-79:2021)		P
	High pressure hose: 4 times the rated pressure, test pressure reached between 15 and 30 s after starting at zero pressure (IEC 60335-2-79:2021)		N/V
21.101.2	Supply hose, if any: 2 times the rated pressure for 5 min (IEC 60335-2-79:2021)		N/A
21.101.3	Low pressure accessory: 2 times of measured pressure (IEC 60335-2-79:2021)		N/A
21.102	Pressure safety devices operate reliably (IEC 60335-2-79:2021)		P
21.103	Hand-held and hand guided appliances, appliances carried on the operator's body in normal use and (IEC 60335-2-79:2021)		N/A
	spray guns are resistant to dropping (IEC 60335-2-79:2021)		P
	Compliance is checked as described (IEC 60335-2-79:2021)		P
21.104	During normal operation, the allowable pressure is not exceeded. (IEC 60335-2-79:2021)		P
	The allowable pressure does not exceed 1,5 times the rated pressure. (IEC 60335-2-79:2021)		P
	Equipped with the nozzle for highest flow assigned by the manufacturer, the flow rate does not deviate more than $\pm 10\%$ from the maximum flow rate. (IEC 60335-2-79:2021)		P
22	CONSTRUCTION		
22.1	Appliance marked with the first numeral or any of the additional letters of the IP system	IPX4	P
22.2	Stationary appliance: means to ensure disconnection from the supply being provided:		—
	- a supply cord fitted with a plug, or		P
	- a switch providing all-pole disconnection complying with 24.3, or		N/A
	- a statement in the instruction sheet that a disconnection incorporated in the fixed wiring is to be provided, or		N/A
	- an appliance inlet		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Singe-pole switches and single-pole protective devices for the disconnection of heating elements in single-phase, permanently connected class 0I and class I appliances, connected to the line conductor		N/A
22.3	Appliance provided with pins: no undue strain on socket-outlets		N/A
	Means for retaining pins withstand the forces to which the pins are like to be subjected in normal use		N/A
	Applied torque not exceeding 0,25 Nm, torque to keep the socket-outlet itself in the vertical plane not included in this value		N/A
	Pull force of 50 N for 1 min to each pin after the appliance has being placed in the heating cabinet; when cooled to room temperature the pins are not displaced by more than 1 mm		N/A
	Each pin subjected to a torque of 0,4 Nm; the pins are not rotating, unless		N/A
	rotating does not impair compliance with this standard		N/A
22.4	Appliance for heating liquids and appliance causing undue vibration not provided with pins for insertion into socket-outlets		P
22.5	No risk of electric shock from charged capacitors resulting in a capacitance equal or greater than 0,1 μ F when touching pins, the appliance being disconnected from the supply at the instant of voltage peak		P
	Voltage not exceeding 34 V (V)..... :	4 V	P
	If compliance relies on the operation of an electronic circuit, the electromagnetic phenomena tests of 19.11.4.3 and 19.11.4.4 are applied		N/A
	The test for measuring the voltage between the pins of the plug is then repeated three times, voltage not exceeding 34 V (V) :		N/A
22.6	Electrical insulation not affected by condensing water or leaking liquid		P
	Electrical insulation of class II appliances not affected if a hose ruptures or seal leaks		N/A
	In case of doubt, test as described		N/A
22.7	Adequate safeguards against the risk of excessive pressure in appliances containing liquid or gases or having steam-producing devices		P
	Any safety device are either inaccessible to the user (IEC 60335-2-79:2021) or		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	it is evident that the setting of the safety valve is sealed (IEC 60335-2-79:2021) and		P
	there is no provision for rendering the device inoperative (IEC 60335-2-79:2021)		P
	Cleaning agent ejected from the safety valve are directed safely (IEC 60335-2-79:2021)	Pressure released on the bottom side	P
22.8	Electrical connections not subject to pulling during cleaning of compartments to which access can be gained without the aid of a tool, and that are likely to be cleaned in normal use		P
22.9	Insulation, internal wiring, windings, commutators and slip rings not exposed to oil, grease or similar substances, unless		P
	the substance has adequate insulating properties		P
22.10	Not possible to reset voltage-maintained non-self-resetting thermal cut-outs by the operation of an automatic switching device incorporated within the appliance, if:		N/A
	- a non-self-resetting thermal cut-out is required by the standard, and		N/A
	- a voltage maintained non-self-resetting thermal cut-out is used to meet it		N/A
	Non-self-resetting thermal motor protectors have a trip-free action, unless		N/A
	they are voltage maintained		N/A
	Reset buttons of non-self-resetting controls so located or protected that accidental resetting is unlikely		N/A
22.11	Reliable fixing of non-detachable parts that provide the necessary degree of protection against electric shock, moisture or contact with moving parts		P
	Obvious locked position of snap-in devices used for fixing such parts		P
	No deterioration of the fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing		N/A
	Tests as described	Push force 50 N applied to external enclosure Pull force 30 N applied to top handle and bottom steam outlet connectors	P
22.12	Handles, knobs, etc. fixed in a reliable manner, if loosening could result in a hazard, including a choking hazard		P
	Requirement concerning the choking hazard does not apply to commercial appliances		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Removing or fixing in wrong position of handles, knobs, etc. indicating position of switches or similar components not possible, if resulting in a hazard		P
	No use of sealing compound and similar materials, other than self-hardening resins, to prevent loosening		N/A
	Axial force of 15 N applied for 1 min to parts unlikely to be subjected to axial pull in normal use		N/A
	Axial force of 30 N applied for 1 min to parts likely to be subjected to axial pull in normal use		N/A
	Loosening of removed parts not resulting in a choking hazard, checked with small parts cylinder		N/A
	Not possible to disconnect parts of the high pressure system without tools (IEC 60335-2-79:2021)		P
22.13	Unlikely that handles, when gripped as in normal use, make the operator's hand touch parts having a temperature rise exceeding the value specified for handles which are held for short periods only		P
22.14	No ragged or sharp edges creating a hazard for the user in normal use or during user maintenance		P
	No exposed pointed ends of self-tapping screws or other fasteners likely to be touched by the user in normal use or during user maintenance		P
22.15	Storage hooks and the like for flexible cords smooth and well rounded		N/A
22.16	Automatic cord reels cause no undue abrasion or damage to the sheath of the flexible cord, no breakage of conductor strands and no undue wear of contacts		N/A
	Cord reel tested with 6 000 operations, as specified		N/A
	Electric strength test of 16.3, voltage of 1 000 V applied		N/A
22.17	Spacers not removable from the outside by hand or by means of a screwdriver or a spanner		N/A
22.18	Current-carrying parts and other metal parts resistant to corrosion, unless		P
	made from stainless steel, plated steel or similar corrosion-resistant alloys		P
22.19	Driving belts not relied upon to provide the required level of insulation, unless		N/A
	constructed to prevent inappropriate replacement		N/A
22.20	Direct contact between live parts and thermal insulation effectively prevented, unless		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	material used is non-corrosive, non-hygroscopic and non-combustible, or thermal insulation is glass-wool		P
22.21	Wood, cotton, silk, ordinary paper and fibrous or hygroscopic material not used as insulation, unless		P
	impregnated		N/A
	Requirement not applicable to magnesium oxide and mineral ceramic fibres electrically insulating heating elements and insulating material where fibre interstices are filled with a suitable insulant		N/A
22.22	Appliances not containing asbestos		P
22.23	Oils containing polychlorinated biphenyl (PCB) not used		P
22.24	Bare heating elements, except in class III appliances or class III constructions that do not contain live parts, adequately supported		N/A
	In case of rupture, the heating conductor is unlikely to come into contact with accessible metal parts		N/A
22.25	Sagging heating conductors cannot come into contact with accessible metal parts		N/A
	Requirement not applicable to class III appliances or class III constructions without live parts, appliances where a core effectively prevents sagging, or where supplementary insulation prevents contact		N/A
22.26	For class III constructions, the insulation between parts operating at safety extra-low voltage and other live parts complies with the requirements for double or reinforced insulation		N/A
22.27	Parts connected by protective impedance separated by double or reinforced insulation		N/A
22.28	Metal parts of class II appliances conductively connected to gas pipes or in contact with water separated from live parts by double or reinforced insulation		N/A
22.29	Class II appliances permanently connected to fixed wiring constructed so that the required degree of access to live parts is maintained after installation		N/A
22.30	Parts serving as supplementary or reinforced insulation fixed so that they cannot be removed without being seriously damaged, or		P
	constructed so that they cannot be replaced in an incorrect position and if omitted, the appliance is rendered inoperable or manifestly incomplete		N/A
22.31	Neither clearances nor creepage distances over supplementary and reinforced insulation reduced below values in clause 29 as a result of wear		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Neither clearances nor creepage distances between live parts and accessible parts reduced below values for supplementary insulation if wires, screws, etc. become loose		P
22.32	Supplementary and reinforced insulation constructed or protected against pollution so that clearances or creepage distances are not reduced below the values in clause 29		P
	Supplementary insulation of natural or synthetic rubber resistant to ageing, or arranged and dimensioned so that creepage distances are not reduced below values specified in 29.2		N/A
	Ceramic material not tightly sintered, similar materials or beads alone not used as supplementary or reinforced insulation		N/A
	Ceramic and similar porous material in which heating conductors are embedded is considered to be basic insulation, not reinforced insulation		N/A
	No visible cracks after oxygen bomb test at 70 °C for 96 h and 16 h at room temperature		N/A
22.33	Conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts are not in direct contact with live parts, or		P
	unearthed metal parts separated from live parts by basic insulation only		P
	Electrodes not used for heating liquids		P
	For class II constructions, conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts are not in direct contact with basic or reinforced insulation, unless		P
	the reinforced insulation consists of at least 3 layers		N/A
	For class II constructions, conductive liquids which are in contact with live parts are not in direct contact with reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	An air layer not used as basic or supplementary insulation in a double insulation system if likely to be bridged by leaking liquid		N/A
22.34	Shafts of operating knobs, handles, levers etc. not live, unless		N/A
	the shaft is not accessible when the part is removed		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
22.35	For other than class III constructions, handles, levers and knobs, held or actuated in normal use, not becoming live in the event of a failure of basic insulation		P
	Such parts being of metal, and their shafts or fixings are likely to become live in the event of a failure of basic insulation, are either adequately covered by insulation material or their accessible parts are separated from their shafts or fixings by supplementary insulation		N/A
	This requirement does not apply to handles, levers and knobs on stationary appliances and cordless appliances, other than those of electrical components, provided they are reliably connected to an earthing terminal or earthing contact, or separated from live parts by earthed metal		N/A
	Insulating material covering metal handles, levers and knobs withstands the electric strength test of 16.3 for supplementary insulation		N/A
	These parts are subject to the hammer test of Clause 21 and meet the requirement of 29.3 (IEC 60335-2-79:2021) or		P
	if this insulation does not meet the requirement of 29.3, these are subject to the impact test as described in the following. (IEC 60335-2-79:2021)		N/A
	After this test, it shows that the insulation has not peeled off (IEC 60335-2-79:2021) and		N/A
	an electric strength test as specified in 16.3 is made between metal parts and metal foil wrapped round the insulation in the required area. (IEC 60335-2-79:2021)		N/A
22.36	For appliances other than class III appliances, handles continuously held in the hand in normal use so constructed that when gripped as in normal use, the operator's hand is not likely to touch metal parts, unless		P
	they are separated from live parts by double or reinforced insulation		P
22.37	Capacitors in class II appliances not connected to accessible metal parts and their casings, if of metal, separated from accessible metal parts by supplementary insulation, unless		N/A
	the capacitors comply with 22.42		N/A
22.38	Capacitors not connected between the contacts of a thermal cut-out		P
22.39	Lampholders used only for the connection of lamps		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
22.40	Motor-operated appliances and combined appliances intended to be moved while in operation, or having accessible moving parts, fitted with a switch to control the motor. The actuating member of the switch being easily visible and accessible		N/A
	If the appliance cannot operate continuously, automatically or remotely without giving rise to a hazard, appliances for remote operation being fitted with a switch for stopping the operation. The actuating member of the switch being easily visible and accessible		N/A
22.41	No components, other than lamps, containing mercury		P
22.42	Protective impedance consisting of at least two separate components		N/A
	Values specified in 8.1.4 not exceeded if any one of the components are short-circuited or open-circuited		N/A
	Resistors checked by the test of 14.2 a) in IEC 60065:2014		N/A
	Capacitors checked by the tests for class Y capacitors in IEC 60384-14:2013 including IEC 60384-14:2013/AMD1:2016		N/A
22.43	Appliances adjustable for different voltages, accidental changing of the setting of the voltage unlikely to occur		N/A
22.44	Appliances not having an enclosure that is shaped or decorated like a toy, unless		P
	a toy is shaped like the appliance		N/A
22.45	When air is used as reinforced insulation, clearances not reduced below the values in 29.1.3 due to deformation of the enclosure, applying a force of 30 N to accessible surfaces		N/A
22.46	For programmable protective electronic circuits used to ensure compliance with the standard, the software contains measures to control the fault/error conditions in Table R.1		N/A
	These requirements are not applicable to software used for functional purpose or compliance with clause 11		N/A
	Compliance checked by evaluating the software in accordance with the relevant requirements of normative Annex R		N/A
	If the software is modified, the evaluation and relevant tests are repeated if the modification influences the results of the test involving protective electronic circuits		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
22.47	Not applicable. (IEC 60335-2-79:2021)		N/A
22.48	Appliances connected to the water mains constructed to prevent back-siphonage of non-potable water		N/V
	Compliance is checked by the relevant tests of IEC 61770, as modified in Annex AA of this standard. (IEC 60335-2-79:2021)		N/V
22.49	For remote operation, the duration of operation is to be set before the appliance can be started, unless		N/A
	the appliance switches off automatically or can operate continuously without hazard		N/A
22.50	Controls incorporated in the appliance take priority over controls actuated by remote operation		N/A
22.51	There is a control on the appliance manually adjusted to the setting for remote operation before the appliance can be operated in this mode		N/A
	There is a visual indication showing that the appliance is adjusted for remote operation		N/A
	These requirements are not necessary on appliances that can operate as follows, without giving rise to a hazard:		—
	- continuously, or		N/A
	- automatically, or		N/A
	- remotely		N/A
22.52	Socket-outlets on appliances accessible to the user in accordance with the socket-outlet system used in the country in which the appliance is sold		N/A
22.53	Class II appliances and class III appliances that incorporate functionally earthed parts have at least double insulation or reinforced insulation between live parts and the functionally earthed parts		N/A
22.54	Button cells and batteries designated R1 not accessible without the aid of a tool, unless		N/A
	the cover of their compartment can only be opened after at least two independent movements have been applied simultaneously		N/A
22.55	Devices operated to stop the intended function of the appliance, if any, are being distinguished from other manual devices by means of shape, size, surface texture, or position	Shape and position	P
	The requirement concerning position does not preclude use of a push on push off switch		P
	An indication when the device has been operated is given by:		—
	- tactile feedback from the actuator or from the appliance, or		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	- reduction in heat output, or		N/A
	- audible and visible feedback		P
22.56	Detachable power supply part provided with the part of class III construction		N/A
22.57	The properties of non-metallic materials do not degrade from exposure to UV-C radiation, as specified in normative Annex T		N/A
	This requirement does not apply to glass, ceramics or similar materials		N/A
22.58	Appliances connected to the supply mains by an appliance inlet are provided with a cord set or a connector for attachment to a suitable flexible cord, except from		N/A
	- appliances complying with IEC 60320-3, or		N/A
	- single phase appliances having a rated current exceeding 16 A, connected to mains by an appliance inlet complying with IEC 60309-2, or		N/A
	- multi-phase appliances connected to mains by an appliance inlet complying with IEC 60309-2		N/A
22.59	Protective extra-low voltage circuits separated by at least supplementary insulation from circuits operating at safety extra-low voltage	No circuits operating at safety extra-low voltage (only protective extra-low voltage circuits)	N/A
22.60	Functional earthing terminals and functional earthing contacts not connected to the neutral terminal		N/A
22.61	Appliance outlets complying with the standard sheets in IEC 60320-3 accessible to the user and socket outlets accessible to the user are single phase, if:		—
	- they are incorporated in appliances connected to the supply mains, and		N/A
	- they operate at rated voltage		N/A
	Current rating not exceeding 16 A (A) :		N/A
	Appliance outlets accessible to the user, other than those supplying accessories, and socket-outlets accessible to the user are protected by one of the following:		—
	- a circuit breaker for equipment complying with IEC 60934, or		N/A
	- a non-user replaceable fuse-link		N/A
	Current rating of protective device not exceeding current rating of the appliance outlet or socket-outlet (A) :		N/A
	Protective device placed behind a non-detachable cover		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Current rating of appliance outlets and socket-outlets marked with the outlet load in watts, obtained from the market outlet load divided by the rated voltage (A) :		N/A
	The protective device is not necessary for appliances for which 30.2.2 is applicable, fitted with a supply cord or cord set, having a plug of the identical maximum current rating as the socket-outlet or appliance outlet integrated into the appliance. (IEC 60335-2-79:2021)		N/A
22.62	Remote communication through public networks does not impair compliance with this standard		N/A
	The requirement does only apply to remote communication where the download of software or the transmission of data:		—
	a) includes measures according to normative Annex R necessary for compliance with 22.46, or		N/A
	includes means necessary for compliance with Clauses 8 to 32		N/A
	b) only affects the software part that is not covered by a), but where compliance might be impaired due to improper separation of partitioning from the software or data in a)		N/A
	The requirement does not apply to appliances:		N/A
	- where all measures to comply with this standards are independent of software,		N/A
	- using remote communication through public networks for the send-only transmission of data, or		N/A
	- that only provide event driven messages or push remote monitoring		N/A
	Compliance checked by inspection of the product and the technical documentation, and by the requirements and tests in normative Annex U		N/A
22.101	Machines constructed so as to prevent the penetration of objects from the floor, which may impair the safety of the machine. (IEC 60335-2-79:2021)		P
	The machine, placed in the intended operation position shall have no live parts less than 60 mm from the floor that could come to contact with liquid. (IEC 60335-2-79:2021)		P
	Portable appliances having a ToM not exceeding 40 kg shall be positioned in all stable positions as defined by the manufacturer with all necessary hoses and supply cords connected and shall have no live parts less than 30 mm from the floor that could come to contact with liquid. (IEC 60335-2-79:2021)		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
22.102	Drain holes have at least a diameter of 5 mm, or an area of 30 mm ² , the width not less than 3 mm (IEC 60335-2-79:2021)		P
22.103	Machine or the trigger gun provided with device for stopping the liquid flow. (IEC 60335-2-79:2021)		P
	For hand-held washing devices, steam cleaners and trigger guns this devices operating automatically without hydraulic pressure when its operating means is not actuated by the user. (IEC 60335-2-79:2021)		P
	It shall not be possible to supply the nozzle with high pressure fluid without having the trigger gun (IEC 60335-2-79:2021) or		P
	equivalent means in the high pressure system. (IEC 60335-2-79:2021)		N/A
	The operating means of hand-held washing devices, steam cleaners and trigger guns shall have a device by means of which it can be locked when the device is in the non-operating condition (IEC 60335-2-79:2021)		P
	Hand-held washing devices, steam cleaners and trigger guns shall not have any locking means in the operating condition. (IEC 60335-2-79:2021)		P
	The operating means positioned so that there is no risk of inadvertent actuation when put down on a flat surface (IEC 60335-2-79:2021)		P
	Water jetters not to be operated by a valve lever, tested as described (IEC 60335-2-79:2021)		N/A
	During and after the test, there is no leakage of water. (IEC 60335-2-79:2021)		N/A
	After the test, the locking device still functional. (IEC 60335-2-79:2021)		N/A
	Drainage of water from the nozzle is permissible during the test of the first requirement (IEC 60335-2-79:2021)		N/A
22.104	Machines, except steam cleaners, provided with pencil jet nozzle facility have a distance from the trigger to the nozzle greater than 750 mm (IEC 60335-2-79:2021)		N/A
22.105	Fitments on the high pressure hoses only accomplished by the manufacturer (IEC 60335-2-79:2021) or		P
	his agent using specialist tools (IEC 60335-2-79:2021)		P
	Water jetters have red marking around the high-pressure hose at a distance of 50 cm from the rigid part of the nozzle (IEC 60335-2-79:2021)		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
22.106	Machines and their parts do not have uncontrolled movement to a hazardous degree when used in accordance with the manufacturer's instructions (IEC 60335-2-79:2021)		P
	Portable appliances having a mass exceeding 100 kg have a parking brake or equivalent means (IEC 60335-2-79:2021)	Stationary appliance with wheels, not considered as a portable appliance. However, wheels have adequate means for braking.	N/A
22.107	The component of the reaction force of the nozzle in the direction of spray gun F_r is limited to 150 N (IEC 60335-2-79:2021)		N/V
	Calculated force F_r (N) (IEC 60335-2-79:2021)... :	Informative: equal to 169,7 N. Manufacturer shall either introduce as solution as per following lines or include and solve this requirement within an own risk assessment	N/V
	If the reaction force in the direction of the handle exceeds 150 N, the trigger gun is equipped with a support by which the reaction force is completely or partially transferred to the operator's body (IEC 60335-2-79:2021)		N/V
	Instead of a support, trigger guns can also be equipped with a two-hand activation mechanism that can only be operated when both operating elements are activated at the same time. (IEC 60335-2-79:2021)		N/V
	Considering the middle of the finger grip as a pivot point, the torque reaction T on the handle is not more than 20 Nm in any direction (IEC 60335-2-79:2021)	$\alpha = 0^\circ$	N/A
	Calculated torque T (Nm) (IEC 60335-2-79:2021):		N/A
22.108	Trigger gun and lance provided with two handles. (IEC 60335-2-79:2021)		P
	One of the handles could be a suitable shape of the spraying pipe. (IEC 60335-2-79:2021)		N/A
22.109	High pressure cleaners fitted with a switch or contactor in their supply circuit that ensures all-pole disconnection (IEC 60335-2-79:2021)		N/A
	Except for stationary appliances, circuits not controlling the motor driving the high pressure pump are acceptable to be directly connected to the supply mains without this switch. (IEC 60335-2-79:2021)		N/A
22.110	The equivalent nozzle diameter of low pressure accessories not less than 2 mm (IEC 60335-2-79:2021)		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
22.111	Fixed guards secured by systems that can be opened or removed only with tools (IEC 60335-2-79:2021) and		P
	incapable of remaining in place without their fixings, if applicable. (IEC 60335-2-79:2021)		P
	Their fixing systems remain attached to the guards (IEC 60335-2-79:2021) or		P
	to the machine when the guards are removed, with the exception of fixing systems that can remain detachable without impairing safety. (IEC 60335-2-79:2021)		N/A
	This does also not apply if, after removal of the fixing systems, (IEC 60335-2-79:2021) or		N/A
	if the component is incorrectly repositioned, the machine becomes inoperative or is obviously incomplete. (IEC 60335-2-79:2021)		N/A
	If movable guards are interlocked, the interlocking devices prevent the start of hazardous machine functions until the guards are fixed in their position (IEC 60335-2-79:2021) and		P
	give a stop command whenever they are no longer closed (IEC 60335-2-79:2021)		P
	Interlocking movable guards, as far as possible, remain attached to the appliance when open (IEC 60335-2-79:2021) and		N/A
	they are designed and constructed in such a way that they can be adjusted only by means of an intentional action. (IEC 60335-2-79:2021)		N/A
	Interlocking movable guards must be designed in such a way that the absence or failure of one of their components prevents starting (IEC 60335-2-79:2021) or		N/A
	stops the hazardous functions of the appliance. (IEC 60335-2-79:2021)		N/A
	Adjustable guards may be used only to restrict access to those areas of the moving parts strictly necessary for the work. (IEC 60335-2-79:2021)		N/A
	They are manually or automatically adjustable based on the type of work involved (IEC 60335-2-79:2021) and		N/A
	are adjustable without use of tools. (IEC 60335-2-79:2021)		N/A
22.112	Machines designed in such a way as to avoid incorrect mounting, if this can lead to an unsafe situation. (IEC 60335-2-79:2021)		N/A
	If this is not possible, information on the correct mounting given directly on the part and/or the enclosure (IEC 60335-2-79:2021)		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
22.113	For machines where the operator is required to use personal protective equipment (PPE), controls designed in such a way that they can be operated safely (IEC 60335-2-79:2021)		P
23	INTERNAL WIRING		
23.1	Wireways smooth and free from sharp edges		P
	Wires protected against contact with burrs, cooling fins, etc.		P
	Wire holes in metal well-rounded or provided with bushings		P
	Wiring effectively prevented from coming into contact with moving parts		N/A
23.2	Beads etc. on live wires cannot change their position, and are not resting on sharp edges		N/A
	Beads inside flexible metal conduits contained within an insulating sleeve		N/A
23.3	Electrical connections and internal conductors movable relatively to each other not exposed to undue stress		P
	Flexible metallic tubes not causing damage to insulation of conductors		N/A
	Open-coil springs not used		N/A
	Adequate insulating lining provided inside a coiled spring, the turns of which touch one another		N/A
	No damage after 10 000 flexings for conductors flexed during normal use, or		N/A
	100 flexings for conductors flexed during user maintenance		N/A
	Electric strength test of 16.3, 1 000 V between live parts and accessible metal parts		N/A
	Not more than 10 % of the strands of any conductor broken, and		N/A
	not more than 30 % for wiring supplying circuits that consume no more than 15 W		N/A
23.4	Bare internal wiring sufficiently rigid and fixed		N/A
23.5	No use of a single layer of internal wiring insulation to provide reinforced insulation		P
	For class II construction, the sheath of a cord complying with IEC 60227 or IEC 60245 or IEC 62821 may provide supplementary insulation		P
	Insulation of single layer internal wiring subjected to the supply mains voltage withstands the electrical stress likely to occur in normal use, if:		—

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	- insulation of single layer internal wiring electrically equivalent to the basic insulation of cords complying with IEC 60227 or IEC 60245 or IEC 62821, or		N/A
	- no breakdown when a voltage of 2 000 V is applied for 15 min between the conductor and metal foil wrapped around the insulation		N/A
23.6	Sleeving used as supplementary insulation on internal wiring retained in position by clamping at both ends, or		P
	be such that it can only be removed by breaking or cutting		P
23.7	The colour combination green/yellow only used for earthing conductors		P
23.8	Aluminium wires not used for internal wiring		P
	The requirement does not apply to windings		P
23.9	Stranded conductors not consolidated by soldering where they are subjected to contact pressure, unless		P
	the contact pressure is provided by spring terminals		N/A
	The requirement does not apply to the soldered tip of a stranded conductor		N/A
23.10	The insulation and sheath of internal wiring, incorporated in external hoses for the connection of an appliance to the water mains, at least equivalent to that of light polyvinyl chloride sheathed flexible cord (60227 IEC 52), checked as specified		N/A
24	COMPONENTS		
24.1	Components comply with safety requirements in relevant IEC standards		P
	List of components :	(See appended table)	P
	Motors not required to comply with IEC 60034-1, they are tested as part of the appliance		N/A
	Relays tested as part of the appliance, or		P
	alternatively, acc. to IEC 60730-1:2013 including IEC 60730-1:2013/AMD1:2015, and meeting the additional requirements in IEC 60335-1		N/A
	The requirements of Clause 29 apply between live parts of components and accessible parts of the appliance		P
	Components can comply with the requirements for clearances and creepage distances for functional insulation in the relevant component standard		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	30.2 of this standard applies to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections		P
	Components that have not been previously tested to comply with the IEC standard for the relevant component are tested according to the requirements of 30.2		P
	Components that have been previously tested to comply with the resistance to fire requirements in the IEC standard for the relevant component need not be retested provided that the specified conditions are met		P
	If these conditions are not satisfied, the component is tested as part of the appliance		P
	Power electronic converter circuits not required to comply with IEC 62477-1, they are tested as part of the appliance		N/A
	If components have not been tested and found to comply with relevant IEC standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		P
	For components mentioned in 24.1.1 to 24.1.9 no additional tests specified in the relevant component standard are necessary other than those specified in 24.1.1 to 24.1.9		P
	Components not tested and found to comply with relevant IEC standard and components not marked or not used according to their marking, tested under the conditions occurring in the appliance		P
	Lampholders and starterholders not being previously tested and found to comply with the relevant IEC standard, tested as a part of the appliance and additionally complying with the gauging and interchangeability requirements of the relevant IEC standard under the conditions occurring in the appliance		N/A
	No additional tests specified for nationally standardized plugs such as those detailed in IEC TR 60083 or connectors or plug connectors complying with the standard sheets of IEC 60320-3 or connectors complying with the standard sheets of IEC 60309-2		P
24.1.1	Capacitors likely to be permanently subjected to the supply voltage and used for radio interference suppression or for voltage dividing comply with IEC 60384-14:2013 including IEC 60384-14:2013/AMD1:2016		P
	If the capacitors have to be tested, they are tested according to normative Annex F		N/A

IEC 60335-2-79			
Clause	Requirement + Test		Verdict
24.1.2	Transformers in associated switch mode power supplies comply with Annex BB of IEC 61558-2-16:2009 including IEC 61558-2-16:2009/AMD1:2013		N/A
	Safety isolating transformers comply with IEC 61558-2-6:2009		P
	If they have to be tested, they are tested according to normative Annex G		N/A
	The relevant standard for ignition transformers is IEC 61558-2-3. (IEC 60335-2-79:2021)		P
24.1.3	Switches comply with IEC 61058-1:2016, number of cycles of operation being at least 10 000, unless		P
	the appliance meets the requirements of this standard when they are rendered inoperative, then the number of cycles need not to be declared for 7.4 of IEC 61058-1:2016		N/A
	If they have to be tested, they are tested according to normative Annex H		Interlock switch P
	If the switch operates a relay or contactor, the complete switching system is subjected to the test		N/A
	If the switch only operates a motor starting relay complying with IEC 60730-2-10 with the number of cycles of a least 10 000 as specified, the complete switching system need not be tested		N/A
	The mains disconnecting switch suitable for at least 10 000 operations (IEC 60335-2-79:2021)		P
	Switches of the trigger gun are for 50 000 operations (IEC 60335-2-79:2021)		N/A
	After the test, the device stop the flow to the nozzle immediately (IEC 60335-2-79:2021)		N/A
	Small leakages are allowed (IEC 60335-2-79:2021)		N/A
24.1.4	Automatic controls comply with IEC 60730-1:2013 including IEC 60730-1:2013/AMD1:2015 together with the relevant part 2. The number of cycles of operation being at least:		—
	- thermostats:	10 000	N/A
	- temperature limiters:	1 000	N/A
	- self-resetting thermal cut-outs:	300	P
	- voltage maintained non-self-resetting thermal cut-outs:	1 000	N/A
	- other non-self-resetting thermal cut-outs:	30	N/A
	- timers:	3 000	N/A
	- energy regulators:	10 000	N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	The number of cycles for controls operating during clause 11 need not be declared, if the appliance meets the requirements of this standard when they are short-circuited or rendered inoperative		P
	If automatic controls have to be tested, additionally tested in accordance with 11.3.5 to 11.3.8 and Clause 17 of IEC 60730-1:2013 including IEC 60730-1:2013/AMD1:2015 as type 1 controls, tests of Clauses 12, 13 and 14 not carried out before the test of Clause 17		N/A
	Thermal motor protectors are tested in combination with their motor under the conditions specified in normative Annex D		N/A
	For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, degree of protection declared for 6.5.2 of IEC 60730-2-8:2018 is IPX7		N/A
	Thermal cut-outs of the capillary type comply with the requirements of IEC 60730-2-9:2015 including IEC 60730-2-9:2015/AMD1:2018 (IEC 60335-2-79:2021)		P
24.1.5	Appliance couplers comply with IEC 60320-1		N/A
	However, for appliances classified higher than IPX0, the appliance couplers comply with IEC 60320-2-3		N/A
24.1.6	Small lampholders similar to E10 lampholders comply with IEC 60238, the requirements for E10 lampholders being applicable		N/A
24.1.7	For remote operation of the appliance via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is IEC 62151		N/A
24.1.8	Thermal links comply with IEC 60691		N/A
	Thermal links not complying with IEC 60691 are considered to be an intentionally weak part for the purposes of Clause 19		N/A
24.1.9	Contactors and relays, other than motor starting relays, tested as part of the appliance		P
	They are also tested in accordance with Clause 17 of IEC 60730-1:2013 including IEC 60730-1:2013/AMD:2015, the number of cycles of operations in 24.1.4 selected according to the contactor or relay function in the appliance.... :		N/A
24.1.10	Lamps and lamp systems that have not been previously tested and found to comply with the exempt group classification of IEC 62471:2006 GLS regarding E _s and E _{UVA} :		—
	- tested as part of the appliance		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	- comply with the requirements of Clause 32 under the conditions occurring in the appliance		N/A
	Unless otherwise specified, the following components are considered to comply with the specified GLS classification:		—
	- visible light indicators		N/A
	- infrared sources used for signalling or communication		N/A
	- seven-segment indicators		N/A
	- liquid crystal displays		N/A
	- organic LED displays (OLED)		N/A
	- plasma displays		N/A
24.1.11	Cord sets required to be provided with the appliance comply with IEC 60799		N/A
	Cord sets with cords complying to IEC 62821-3 allowed		N/A
24.2	Appliances not fitted with:		—
	- switches, automatic controls, power supplies and the like in flexible cords		P
	- devices causing the protective device in the fixed wiring to operate in the event of a fault in the appliance		P
	- thermal cut-outs that can be reset by soldering, unless		P
	the solder has a melting point of at least 230 °C		N/A
24.3	Switches intended for all-pole disconnection of stationary appliances are directly connected to the supply terminals and have a contact separation in all poles, providing full disconnection under overvoltage category III conditions		N/A
24.4	Plugs and socket-outlets for extra-low voltage circuits and heating elements, not interchangeable with plugs and socket-outlets listed in IEC TR 60083 or IEC 60906-1 or with connectors, appliance inlets, plug connectors and appliance outlets complying with the standard sheets of IEC 60320-3		N/A
24.5	Capacitors in auxiliary windings of motors marked with their voltage rating and their rated capacitance, and used accordingly		P
	Voltage across capacitors in series with a motor winding does not exceed 1,1 times its voltage rating, when the appliance is supplied at 1,1 times rated voltage under minimum load	Voltage across capacitor: 440 V at 253 V; voltage rating of motor capacitor: 425 V; 1,1 x 425 V = 467,5 V	P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
24.6	Working voltage of motors connected to the supply mains and having basic insulation that is inadequate for the rated voltage of the appliance, not exceeding 42 V		N/A
	In addition, the motors comply with the requirements of normative Annex I		N/A
24.7	Not applicable (IEC 60335-2-79:2021)		N/A
24.8	Motor running capacitors in appliances for which 30.2.3 is applicable and that are permanently connected in series with a motor winding, not causing a hazard in event of a failure		N/A
	One or more of the following conditions are to be met:		—
	- the capacitors are of class S2 or S3 according to IEC 60252-1:2010 including IEC 60252-1:2010/AMD1:2013		N/A
	- the capacitors are housed within a metallic or ceramic enclosure		N/A
	- the distance of separation of the outer surface to adjacent non-metallic parts exceeds 50 mm		N/A
	- adjacent non-metallic parts within 50 mm withstand the needle-flame test of normative Annex E		N/A
	- adjacent non-metallic parts within 50 mm classified as at least V-1 according to IEC 60695-11-10		N/A
	For capacitors complying with IEC 60252-1:2010 including IEC 60252-1:2010/AMD1:2013, damp heat test for 5.14 of that standard with severity parameters as specified		N/A
25	SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS		
25.1	Appliance not intended for permanent connection to fixed wiring, means for connection to the supply:		—
	- supply cord fitted with a plug, the current rating and voltage rating of the plug being not less than the corresponding ratings of its associated appliance		P
	- an appliance inlet having at least the same degree of protection against moisture as required for the appliance, or		N/A
	- pins for insertion into socket-outlets		N/A
	Three phase appliances are not required to be provided with a plug (IEC 60335-2-79:2021)		N/A
	IPX7 appliances not provided with an appliance inlet (IEC 60335-2-79:2021)		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Machines classified as IPX4, IPX5 or IPX6 not provided with an appliance inlet (IEC 60335-2-79:2021) unless		P
	both inlet and connector have the same classification as the appliance when coupled or separated (IEC 60335-2-79:2021) or unless		N/A
	inlet and connector can only be separated by the use of a tool and have the same classification as the appliance when coupled (IEC 60335-2-79:2021)		N/A
	Machines provided with appliance inlets also provided with an appropriate cord set (IEC 60335-2-79:2021)		N/A
25.2	Appliance not provided with more than one means of connection to the supply mains		P
	Stationary appliance for multiple supply may be provided with more than one means of connection, provided electric strength test of 1 250 V for 1 min between each means of connection causes no breakdown		N/A
25.3	Appliance intended to be permanently connected to fixed wiring provided with one of the following means for connection to the supply mains:		—
	- cord anchorage and a set of terminals allowing the connection of a flexible cord		N/A
	- a fitted supply cord		N/A
	- a set of supply leads accommodated in a suitable compartment		N/A
	- a set of terminals for the connection of cables of fixed wiring, cross-sectional areas specified in 26.6, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	- a set of terminals and cable entries, conduit entries, knock-outs or glands, allowing connection of appropriate types of cable or conduit, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	For a fixed appliance constructed so that parts can be removed to facilitate easy installation, this requirement is met if it is possible to connect the fixed wiring without difficulty after a part of the appliance has been fixed to its support		N/A
25.4	Cable and conduit entries, rated current of appliance not exceeding 16 A, dimension according to Table 10 (mm)..... :		N/A
	Introduction of conduit or cable does not reduce clearances or creepage distances below values specified in clause 29		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
25.5	Method for assembling the supply cord to the appliance:		—
	- type X attachment		N/A
	- type Y attachment		P
	- type Z attachment, if allowed in relevant part 2		N/A
	Type X attachment, other than those with a specially prepared cord, not used for flat twin tinsel cords		N/A
	For multi-phase appliances supplied with a supply cord and that are intended to be permanently connected to fixed wiring, the supply cord is assembled to the appliance by type Y attachment		N/A
25.6	Plugs fitted with only one flexible cord		P
25.7	Supply cords, other than for class III appliances, being one of the following types:		—
	- rubber sheathed (at least 60245 IEC 53), unless		N/A
	The appliance is intended to be used outdoors or is liable to being exposed to ultraviolet radiation		N/A
	- polychloroprene sheathed (at least 60245 IEC 57),		N/A
	supply cords being allowed to be connected to appliances intended for use in low temperature		N/A
	- polyvinyl chloride sheathed. Not used if they are likely to touch metal parts having a temperature rise exceeding 75 K during the test of clause 11		—
	light polyvinyl chloride sheathed cord (60227 IEC 52), for appliances not exceeding 3 kg		N/A
	ordinary polyvinyl chloride sheathed cord (60227 IEC 53), for other appliances		P
	- heat resistant polyvinyl chloride sheathed. Not used for type X attachment other than specially prepared cords:		—
	heat-resistant light polyvinyl chloride sheathed cord (60227 IEC 56), for appliances not exceeding 3 kg		N/A
	heat-resistant polyvinyl chloride sheathed cord (60227 IEC 57), for other appliances		N/A
	- halogen-free, low smoke, thermoplastic insulated and sheathed:		—
	light duty halogen-free low smoke flexible cable (62821 IEC 101) for circular cable and (62821 IEC 101f) for flat cable		N/A
	Ordinary duty halogen-free low smoke flexible cable (62821 IEC 102) for circular cable and (62821 IEC 102f) for flat cable		N/A
	Supply cords for class III appliances adequately insulated		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Test with 500 V for 2 min for supply cords of class III appliances that contain live parts		N/A
	Supply cords of machines other than stationary machines not less than 5 m in length (IEC 60335-2-79:2021) except that	Stationary machine	N/A
	for hand-held machines and appliances carried on the operator's body the supply cord not less than 15 m (IEC 60335-2-79:2021)		N/A
	Ordinary tough rubber-sheathed flexible cord not used for this type of machine due to attack by cleaning agents. (IEC 60335-2-79:2021)		N/A
	PVC cords are acceptable for temperatures above 0 °C (IEC 60335-2-79:2021)		N/A
	Only polychloroprene-sheathed cords (60245 IEC 57 or higher) are allowed at temperatures below 0 °C (IEC 60335-2-79:2021)		N/A
	For industrial and commercial use, heavy polychloroprene-sheathed flexible cord (60245 IEC 66 or higher) is required. (IEC 60335-2-79:2021)		N/A
25.8	Nominal cross-sectional area of supply cords not less than Table 11; rated current (A); cross-sectional area (mm ²) :	Rated current: 2,1 A, cross-sectional area: 1,5 mm ²	P
25.9	Supply cords not in contact with sharp points or edges		P
25.10	Supply cord of class I appliances have a green/yellow core for earthing		P
	In multi-phase appliances, the colour of the neutral conductor of the supply cord is blue		N/A
	Where additional neutral conductors are provided in the supply cord:		—
	- other colours may be used for these additional neutral conductors;		N/A
	- all of the neutral conductors and line conductors are identified by marking using the alphanumeric notation specified in IEC 60445		N/A
	- the supply cord is fitted to the appliance		N/A
25.11	Conductors of supply cords not consolidated by soldering where they are subject to contact pressure, unless		P
	the contact pressure is provided by spring terminals		N/A
	The requirement does not apply to the soldered tip of a stranded conductor		N/A
25.12	Insulation of the supply cord not damaged when moulding the cord to part of the enclosure		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
25.13	Inlet openings so constructed as to prevent damage to the supply cord		P
	If it is not evident that the supply cord can be introduced without risk of damage, a non-detachable lining or bushing complying with 29.3 for supplementary insulation provided		N/A
	If unsheathed supply cord, a similar additional bushing or lining is required, unless the appliance is:		—
	- a class 0 appliance, or		N/A
	- a class III appliance not containing live parts		N/A
25.14	Supply cords moved while in operation adequately protected against excessive flexing, unless		N/A
	appliance is fitted with automatic cord reels complying with the requirement and test of 22.16		N/A
	Flexing test, as described:		—
	- applied force (N)		N/A
	- number of flexings		N/A
	The test does not result in:		—
	- short-circuit between the conductors, such that the current exceeds a value of twice the rated current		N/A
	- breakage of more than 10 % of the strands of any conductor		N/A
	- separation of the conductor from its terminal		N/A
	- loosening of any cord guard		N/A
	- damage to the cord or the cord guard		N/A
	- broken strands piercing the insulation and becoming accessible		N/A
25.15	For appliances with supply cord and appliances to be permanently connected to fixed wiring by a flexible cord, conductors of the supply cord relieved from strain, twisting and abrasion by use of cord anchorage		P
	The cord cannot be pushed into the appliance to such an extent that the cord or internal parts of the appliance can be damaged		P
	Pull and torque test of supply cord:		—
	- fixed appliances: pull 100 N; torque (not on automatic cord reel) (Nm)		N/A
	- other appliances: values shown in Table 12: mass (kg); pull (N); torque (Nm, not on automatic cord reel)	150 kg; 100 N; 0,35 Nm	P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	The test is also applied to the cord in the cord set for machines classified as IPX4 or higher that are provided with an appliance inlet. (IEC 60335-2-79:2021)		N/A
	The cord set is fitted to the appliance inlet prior to the commencement of the test. (IEC 60335-2-79:2021)		N/A
	Cord not damaged and max. 2 mm displacement of the cord	1,1 mm	P
25.16	Cord anchorages for type X attachments constructed and located so that:		—
	- replacement of the cord is easily possible		N/A
	- it is clear how the relief from strain and the prevention of twisting are obtained		N/A
	- they are suitable for different types of supply cord		N/A
	- cord cannot touch the clamping screws of cord anchorage if these screws are accessible, unless		N/A
	they are separated from accessible metal parts by supplementary insulation		N/A
	- the cord is not clamped by a metal screw which bears directly on the cord		N/A
	- at least one part of the cord anchorage securely fixed to the appliance, unless		N/A
	it is part of a specially prepared cord		N/A
	Not applicable if the cord anchorage comprises one or more clamping members subjected to pressure by means of nuts engaging with securely attached studs, even if removal possible, or if		N/A
	one clamping member is fixed to the appliance or obviously shaped insulating material is used as the surface of the appliance		N/A
	- screws which have to be operated when replacing the cord do not fix any other component, unless		N/A
	the appliance becomes inoperative or incomplete or the parts cannot be removed without a tool		N/A
	- if labyrinths can be bypassed, the test of 25.15 is nevertheless withstood		N/A
	- for class 0, 0I and I appliances, they are of insulating material or are provided with an insulating lining, unless		N/A
	failure of the insulation of the cord does not make accessible metal parts live		N/A
	- for class II appliances, they are of insulating material, or		N/A
	if of metal, they are insulated from accessible metal parts by supplementary insulation		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Compliance checked by inspection and by the test of 25.15 under the following conditions:		—
	- carried out with lightest permissible type of cord of the smallest cross-sectional area specified in Table 13, then with next heavier type cord having the largest cross-sectional area specified, however		N/A
	if the appliance is fitted with a specially prepared cord, test carried out with this cord		N/A
	- conductors placed in the terminals and any terminal screws tightened to prevent the conductors from easily changing their position		N/A
	- clamping screws of the cord anchorage tightened with two-thirds of the torque specified in 28.1		N/A
	- screws of insulating material bearing directly on the cord fastened with two-thirds of the torque specified in column I of Table 14, the length of the slot in the screw head being taken as the nominal diameter of the screw		N/A
	After the test, the conductors have not moved by more than 1 mm in the terminals		N/A
25.17	Adequate cord anchorages for type Y and Z attachment, test with the cord supplied with the appliance		P
25.18	Cord anchorages only accessible with the aid of a tool, or		N/A
	constructed so that the cord can only be fitted with the aid of a tool		P
25.19	Type X attachment, glands not used as cord anchorage in portable appliances		N/A
	Tying the cord into a knot or tying the cord with string not used		N/A
25.20	The conductors of the supply cord for type Y and Z attachment insulated from accessible metal parts		P
25.21	Space for supply cord for type X attachment or for connection of fixed wiring constructed:		—
	- to permit checking of conductors with respect to correct positioning and connection before fitting any cover		N/A
	- so there is no risk of damage to the conductors or their insulation when fitting the cover		N/A
	- for portable appliances, so that the uninsulated end of a conductor, if it becomes free from the terminal, prevented from contact with accessible metal parts		N/A
	2 N test to the conductor for portable appliances; no contact with accessible metal parts		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
25.22	Appliance inlets:		—
	- live parts not accessible during insertion or removal		N/A
	Requirement not applicable to appliance inlets complying with IEC 60320-1		N/A
	- connector can be inserted without difficulty		N/A
	- the appliance is not supported by the connector		N/A
	- not for cold conditions if temp. rise of external metal parts exceeds 75 K during clause 11, unless		N/A
	the flexible cord of the cord set is unlikely to touch such metal parts		N/A
25.23	Interconnection cords comply with the requirements for the supply cord, except that:		—
	- the cross-sectional area of the conductors is determined based on the maximum current during clause 10, and		N/A
	if the current is greater than the rated current, but not exceeding the rated current by more than the current deviation in Table 2, the cross-sectional area does not need to be greater than the one of the conductors in the supply cord		N/A
	- the thickness of the insulation may be reduced		N/A
	- for class I or class II appliance with class III construction, the cross-sectional areas of the conductors need not comply with 25.8 if specified conditions are met		N/A
	If necessary, electric strength test of 16.3		N/A
25.24	Interconnection cords not detachable without the aid of a tool if compliance with this standard is impaired when they are disconnected		N/A
25.25	Dimensions of pins that are inserted into socket-outlets compatible with the dimensions of the relevant socket-outlet		N/A
	Dimensions of pins and engagement face in accordance with the dimensions of the relevant plug in IEC TR 60083		N/A
26	TERMINALS FOR EXTERNAL CONDUCTORS		
26.1	Appliances provided with terminals or equally effective devices, such as male tabs of flat quick-connect terminations (IEC 61210), screw type terminals (IEC 60998-2-1), screwless terminals (IEC 60998-2-2) and clamping units (IEC 60999-1:1999), for connection of external conductors		P
	Terminals only accessible after removal of a non-detachable cover, except		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	for class III appliances that do not contain live parts		N/A
	Earthing terminals and functional earthing terminals may be accessible if a tool is required to make the connections and means are provided to clamp the wire independently from its connection		N/A
26.2	Appliances with type X attachment and appliances for the connection of cables of fixed wiring provided with terminals in which connections are made by means of screws, nuts or similar devices, unless		N/A
	the connections are soldered		N/A
	Screws and nuts not used to fix any other component, except		N/A
	internal conductors, if so arranged that they are unlikely to be displaced when fitting the supply conductors		N/A
	If soldered connections used, the conductor so positioned or fixed that reliance is not placed on soldering alone, unless		N/A
	barriers provided so that neither clearances nor creepage distances between live parts and other metal parts reduced below the values for supplementary insulation if the conductor becomes free at the soldered joint		N/A
26.3	Terminals for type X attachment and for connection of cables of fixed wiring constructed so that the conductor is clamped between metal surfaces with sufficient contact pressure but without damaging the conductor		N/A
	Terminals fixed so that when the clamping means is tightened or loosened:		—
	- the terminal does not become loose		N/A
	- internal wiring is not subjected to stress		N/A
	- neither clearances nor creepage distances are reduced below the values in clause 29		N/A
	Compliance checked by inspection and by the test of subclause 9.6 of IEC 60999-1:1999, the torque applied being equal to two-thirds of the torque specified (Nm)..... :		N/A
	No deep or sharp indentations of the conductors		N/A
26.4	Terminals for type X attachment, except those having a specially prepared cord and those for the connection of cables of fixed wiring, no special preparation of conductors such as by soldering, use of cable lugs, eyelets or similar,		N/A
	Reshaping of the conductor before its introduction into the terminal or twisting a stranded conductor to consolidate the end is not considered special preparation		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Terminals constructed or placed so that conductors prevented from slipping out when clamping screws or nuts are tightened		N/A
26.5	Terminals for type X attachment so located or shielded that if a wire of a stranded conductor escapes, no risk of accidental connection to other parts that result in a hazard		N/A
	Stranded conductor test, 8 mm insulation removed		N/A
	No contact between live parts and accessible metal parts and,		N/A
	for class II constructions, between live parts and metal parts separated from accessible metal parts by supplementary insulation only		N/A
26.6	Terminals for type X attachment and for connection of cables of fixed wiring suitable for connection of conductors with cross-sectional area according to Table 13; rated current (A); nominal cross-sectional area (mm ²) :		N/A
	If a specially prepared cord is used, terminals need only be suitable for that cord		N/A
26.7	Terminals for type X attachment, except in class III appliances not containing live parts, accessible after removal of a cover or part of the enclosure		N/A
26.8	Terminals for the connection of fixed wiring, including the earthing terminal, located close to each other		N/A
26.9	Terminals of the pillar type constructed and located as specified		P
26.10	Terminals with screw clamping and screwless terminals not used for flat twin tinsel cords, unless		P
	ends of conductors fitted with means suitable for screw terminals		N/A
	Pull test of 5 N to the connection		N/A
26.11	For type Y and Z attachment, soldered, welded, crimped or similar connections may be used		P
	For class II appliances, the conductor so positioned or fixed that reliance is not placed on soldering, welding or crimping alone		N/A
	If soldering, welding or crimping alone used, barriers provided so that clearances and creepage distances between live parts and other metal parts are not reduced below the values for supplementary insulation if the conductor becomes free		N/A
27	PROVISION FOR EARTHING		

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
27.1	Accessible metal parts, including metal parts behind a decorative cover that does not withstand the test of 21.1, of class 0I and I appliances permanently and reliably connected to an earthing terminal or earthing contact of the appliance inlet		P
	Earthing terminals and earthing contacts not connected to the neutral terminal		P
	Class 0, II and III appliances have no provision for protective earthing		N/A
	Safety extra-low voltage circuits not earthed, unless		N/A
	protective extra-low voltage circuits		P
27.2	Clamping means of earthing terminals adequately secured against accidental loosening		P
	Terminals for the connection of external equipotential bonding conductors allow connection of conductors of 2,5 mm ² to 6 mm ² , and		N/A
	- do not provide earthing continuity between different parts of the appliance, and		N/A
	- conductors cannot be loosened without the aid of a tool		N/A
27.3	For a detachable part having an earth connection and being plugged into another part of the appliance, the earth connection is made before and separated after current-carrying connections when removing the part		N/A
	For appliances with supply cords, current-carrying conductors become taut before earthing conductor, if the cord slips out of the cord anchorage		P
27.4	No risk of corrosion resulting from contact between parts of the earthing terminal and the copper of the earthing conductor or other metal		P
	Parts providing earthing continuity, other than parts of a metal frame or enclosure, have adequate resistance to corrosion		P
	If of steel, these parts provided with an electroplated coating, thickness of at least 5 µm		N/A
	Adequate protection against rusting of parts of coated or uncoated steel, only intended to provide or transmit contact pressure		P
	In the body of the earthing terminal is a part of a frame or enclosure of aluminium or aluminium alloys, precautions taken to avoid risk of corrosion		N/A
	In case of doubt, thickness of coating measured as described in ISO 2178 or in ISO 1463		N/A
27.5	Low resistance of connection between earthing terminal and earthed metal parts		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	This requirement does not apply to connections providing earthing continuity in the protective extra-low voltage circuit, provided the clearances of basic insulation are based on the rated voltage of the appliance		P
	Resistance not exceeding 0,1 Ω at the specified low-resistance test (Ω)..... :	0,06 Ω	P
27.6	The printed conductors of printed circuit boards not used to provide earthing continuity in hand-held appliances		N/A
	They may be used to provide earthing continuity in other appliances if at least two tracks are used with independent soldering points and the appliance complies with 27.5 for each circuit		N/A
28	SCREWS AND CONNECTIONS		
28.1	Fixings, electrical connections and connections providing earthing continuity withstand mechanical stresses		P
	Screws not of soft metal liable to creep, such as zinc or aluminium		P
	Diameter of screws of insulating material min. 3 mm		N/A
	Screws of insulating material not used for any electrical connections or connections providing earthing continuity		P
	Screws used for electrical connections or connections providing earthing continuity screwed into metal		P
	Screws not of insulating material if their replacement by a metal screw can impair supplementary or reinforced insulation		N/A
	For type X attachment, screws to be removed for replacement of supply cord or for user maintenance, not of insulating material if their replacement by a metal screw impairs basic insulation		N/A
	For screws and nuts; torque-test as specified in Table 14..... :	(See appended table)	P
28.2	Electrical connections and connections providing earthing continuity constructed so that contact pressure is not transmitted through non-ceramic insulating material liable to shrink or distort, unless		P
	there is resiliency in the metallic parts to compensate for shrinkage or distortion of the insulating material		N/A
	This requirement does not apply to electrical connections in circuits of appliances for which:		—

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	- 30.2.2 is applicable and that carry a current not exceeding 0,5 A		N/A
	- 30.2.3 is applicable and that carry a current not exceeding 0,2 A		N/A
28.3	Space-threaded (sheet metal) screws only used for electrical connections if they clamp the parts together		N/A
	Thread-cutting (self-tapping) screws and thread rolling screws only used for electrical connections if they generate a full form standard machine screw thread		N/A
	Thread-cutting (self-tapping) screws not used if they are likely to be operated by the user or installer		N/A
	Thread-cutting, thread rolling and space threaded screws may be used in connections providing earthing continuity provided it is not necessary to disturb the connection:		—
	- in normal use,		N/A
	- during user maintenance,		N/A
	- when replacing a supply cord having a type X attachment, or		N/A
	- during installation		N/A
	At least two screws being used for each connection providing earthing continuity, unless		N/A
	the screw forms a thread having a length of at least half the diameter of the screw		N/A
28.4	Screws and nuts that make mechanical connection secured against loosening by means such as spring washer, lock washers and crown type locks, if they also make electrical connections or connections providing earthing continuity		P
	For screw connections not subjected to torsion, sealing compound that softens on heating allowed to be used to provide security against loosening		P
	This requirement does not apply to screws in the earthing circuit if at least two screws are used, or		P
	if an alternative earthing circuit is provided		P
	Rivets for electrical connections or connections providing earthing continuity secured against loosening if the connections are subjected to torsion		N/A
	If connections subjected to torsion, a rivet having a non-circular shank or an appropriate notch allowed to be used to secure against loosening		N/A
29	CLEARANCES, CREEPAGE DISTANCES AND SOLID INSULATION		

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Clearances, creepage distances and solid insulation withstand electrical stress		P
	For coatings used on printed circuits boards to protect the microenvironment (type 1) or to provide basic insulation (type 2), normative Annex J applies		N/A
	The microenvironment is pollution degree 1 under type 1 protection		N/A
	For type 2 protection, the spacing between the conductors before the protection is applied is not less than the values specified in Table 1 of IEC 60664-3:2016		N/A
	These values apply to functional, basic, supplementary and reinforced insulation.....		N/A
29.1	Clearances not less than the values specified in Table 16, taking into account the rated impulse voltage for the overvoltage categories of Table 15, unless	(See appended table)	P
	for basic insulation and functional insulation, they comply with the impulse voltage test of clause 14		N/A
	For appliances intended for use at altitudes exceeding 2 000 m, the clearances in Table 16 are increased according to the altitude correction factor in Table A.2 of IEC 60664-1:2007		N/A
	However, the impulse voltage test is not applicable if the construction is such that the distances could be affected by any of the following:		—
	- distortion		N/A
	- movement of parts		N/A
	- assembly of parts		N/A
	- wear of basic insulation		N/A
	- wear of functional insulation		N/A
	In this case, the clearances for rated impulse voltages of 1 500 V and above specified in Table 16 are increased by 0,5 mm		N/A
	Impulse voltage test is not applicable:		—
	- when the microenvironment is pollution degree 3, or		N/A
	- for basic insulation of class 0 and class 0I appliances, or		N/A
	- to appliances intended for use at altitudes exceeding 2 000 m		N/A
	Appliances are in overvoltage category II		N/A
	A force of 2 N is applied to bare conductors, other than heating elements		N/A
	A force of 30 N is applied to accessible surfaces		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	The requirement is not applicable to the air gap between the spark electrodes (IEC 60335-2-79:2021)		N/A
	The requirement is not applicable to the distance between high voltage spark electrodes and PE for appliances using galvanic isolated sparking transformers with common earth for generating the sparking voltage. (IEC 60335-2-79:2021)		N/A
	This requirement is not applicable to the air gap between the electrodes. (IEC 60335-2-79:2021)		N/A
29.1.1	Clearances of basic insulation withstand the overvoltages, taking into account the rated impulse voltage		P
	The values of Table 16 or the impulse voltage test of clause 14 are applicable..... :	(See appended table)	P
	Clearance at the terminals of tubular sheathed heating elements may be reduced to 1,0 mm, if the microenvironment is pollution degree 1		N/A
	Lacquered conductors of windings considered to be bare conductors		P
29.1.2	Clearances of supplementary insulation not less than those spec. for basic insulation in Table 16 . :	(See appended table)	P
29.1.3	Clearances of reinforced insulation not less than those specified in Table 16, using the next higher step for rated impulse voltage :	(See appended table)	P
	For double insulation, with no intermediate conductive part between basic and supplementary insulation, clearances are measured between live parts and the accessible surface, and the insulation system is treated as reinforced insulation		N/A
29.1.4	Clearances for functional insulation are the largest values determined from:		—
	- Table 16 based on the rated impulse voltage :	(See appended table)	P
	- Table F.7a in IEC 60664-1:2007, frequency not exceeding 30 kHz		N/A
	- clause 4 of IEC 60664-4:2005, frequency exceeding 30 kHz		N/A
	If values of Table 16 are largest, the impulse voltage test of clause 14 may be applied instead, unless		N/A
	the microenvironment is pollution degree 3, or		N/A
	the distances can be affected by wear, distortion, movement of the parts or during assembly		N/A
	However, clearances are not specified if the appliance complies with clause 19 with the functional insulation short-circuited		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Lacquered conductors of windings considered to be bare conductors		P
	However, clearances at crossover points are not measured		P
	Clearance between surfaces of PTC heating elements may be reduced to 1 mm		N/A
29.1.5	Appliances having higher working voltages than rated voltage, clearances for basic insulation are the largest values determined from:		—
	- Table 16 based on the rated impulse voltage :		N/A
	- Table F.7a in IEC 60664-1:2007, frequency not exceeding 30 kHz		N/A
	- clause 4 of IEC 60664-4:2005, frequency exceeding 30 kHz		N/A
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1:2007 or Clause 4 of IEC 60664-4:2005, the clearances of supplementary insulation are not less than those specified for basic insulation		N/A
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1:2007, the clearances of reinforced insulation dimensioned as specified in Table F.7a are to withstand 160 % of the withstand voltage required for basic insulation		N/A
	If clearances for basic insulation are selected from Clause 4 of IEC 60664-4:2005, the clearances of reinforced insulation are twice the value required for basic insulation		N/A
	If the secondary winding of a step-down transformer is earthed, or if there is an earthed screen between the primary and secondary windings, clearances of basic insulation on the secondary side not less than those specified in Table 16, but using the next lower step for rated impulse voltage		N/A
	Circuits supplied with a voltage lower than rated voltage, clearances of functional insulation are based on the working voltage used as the rated voltage in Table 15		N/A
29.2	Creepage distances not less than those appropriate for the working voltage, taking into account the material group and the pollution degree..... :	(See appended table)	P
	Pollution degree 2 applies, unless		P
	- precautions taken to protect the insulation; pollution degree 1		N/A
	- insulation subjected to conductive pollution; pollution degree 3		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	A force of 2 N is applied to bare conductors, other than heating elements		N/A
	A force of 30 N is applied to accessible surfaces		P
	In a double insulation system, the working voltage for both the basic and supplementary insulation is taken as the working voltage across the complete double insulation system		P
	The microenvironment is pollution degree 3 (IEC 60335-2-79:2021) unless		P
	the insulation is enclosed or located so that it is unlikely to be exposed to pollution due to normal use of the machine. (IEC 60335-2-79:2021)		P
29.2.1	Creepage distances of basic insulation not less than specified in Table 17..... :	(See appended table)	P
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from Table 2 of IEC 60664-4:2005, these values being used if exceeding the values in Table 17 :		N/A
	Except for pollution degree 1, corresponding creepage distance not less than the minimum specified for the clearance in Table 16, if the clearance has been checked according to the test of clause 14 :		N/A
29.2.2	Creepage distances of supplementary insulation at least those specified for basic insulation in Table 17, excluding NOTE 1 and NOTE 2, or :	(See appended table)	P
	Table 2 of IEC 60664-4:2005, as applicable :		N/A
29.2.3	Creepage distances of reinforced insulation at least double those specified for basic insulation in Table 17, excluding NOTE 1 and NOTE 2, or :	(See appended table)	P
	Table 2 of IEC 60664-4:2005, as applicable :		N/A
29.2.4	Creepage distances of functional insulation not less than specified in Table 18..... :	(See appended table)	P
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from Table 2 of IEC 60664-4:2005, these values being used if exceeding the values in Table 18 :		N/A
	Creepage distances may be reduced if the appliance complies with clause 19 with the functional insulation short-circuited		P
29.3	Supplementary and reinforced insulation have adequate thickness, or a sufficient number of layers, to withstand the electrical stresses		P
	Compliance checked:		—
	- by measurement, in accordance with 29.3.1, or		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	- by an electric strength test in accordance with 29.3.2, or		N/A
	- for insulation, other than single layer internal wiring insulation, by an assessment of the thermal quality of the material combined with an electric strength test, in accordance with 29.3.3, and		N/A
	for accessible parts of reinforced insulation consisting of a single layer, by measurement in accordance with 29.3.4, or		N/A
	- by an assessment of the thermal quality of the material according to 29.3.3 combined with an electric strength test in accordance with 23.5, for each single layer internal wiring insulation touching each other, or		N/A
	- as specified in subclause 6.3 of IEC 60664-4:2005 for insulation that is subjected to any periodic voltage having a frequency exceeding 30 kHz		N/A
29.3.1	Supplementary insulation; thickness at least 1 mm		N/A
	Reinforced insulation; thickness of at least 2 mm		P
29.3.2	Each layer of material withstands the electric strength test of 16.3 for supplementary insulation		N/A
	Supplementary insulation consists of at least 2 layers		N/A
	Reinforced insulation consists of at least 3 layers		N/A
29.3.3	The insulation is subjected to the dry heat test Bb of IEC 60068-2-2, followed by		N/A
	the electric strength test of 16.3		N/A
	If the temperature rise during the tests of clause 19 does not exceed the value specified in Table 3, the test of IEC 60068-2-2 is not carried out		N/A
29.3.4	Thickness of accessible parts of reinforced insulation consisting of a single layer not less than specified in Table 19..... :		N/A
30	RESISTANCE TO HEAT AND FIRE		
30.1	External parts of non-metallic material,		P
	parts supporting live parts, and		P
	parts of thermoplastic material providing supplementary or reinforced insulation		P
	sufficiently resistant to heat		P
	This requirement does not apply to:		N/A
	- the insulation or sheath of flexible cords or internal wiring		N/A
	- those parts of coil formers that do not support or retain terminals in position		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	- parts of ceramic material		N/A
	Ball-pressure test according to IEC 60695-10-2		P
	External parts tested at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 75 °C, whichever is the higher; temperature (°C) :	(See appended table 30.1)	P
	Parts supporting live parts tested at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 125 °C, whichever is the higher; temperature (°C)..... :	(See appended table 30.1)	P
	Parts of thermoplastic material providing supplementary or reinforced insulation tested at 25 °C plus the maximum temperature rise determined during clause 19, if higher; temperature (°C) :	(See appended table 30.1)	P
30.2	Parts of non-metallic material resistant to ignition and spread of fire		P
	This requirement does not apply to:		—
	- parts of a mass not exceeding 0,5 g, provided the cumulative effect is unlikely to propagate flames that originate inside the appliance by propagating flames from one part to another, or		P
	- decorative trims, knobs and other parts unlikely to be ignited or to propagate flames that originate inside the appliance		P
	Compliance checked by the test of 30.2.1, and in addition:		P
	- for attended appliances, 30.2.2 applies		P
	- for unattended appliances, 30.2.3 applies		N/A
	For appliances for remote operation, 30.2.3 applies		N/A
	For parts of appliances connected to the supply mains during charging, 30.2.3 applies		N/A
	For base material of printed circuit boards, 30.2.4 applies		P
30.2.1	Parts of non-metallic material subjected to the glow-wire test of IEC 60695-2-11:2014 at 550 °C	(See appended table 30.2)	P
	However, test not carried out if the material is classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 550 °C, or		N/A
	the material is classified at least HB40 according to IEC 60695-11-10		N/A
	Parts for which the glow-wire test cannot be carried out need to meet the requirements in ISO 9772 for material classified HBF		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
30.2.2	Appliances operated while attended, parts of non-metallic material supporting current-carrying connections, such as switch contacts and the like in other components, and		P
	parts of non-metallic material within a distance of 3 mm of such connections,		P
	subjected to the glow-wire test of IEC 60695-2-11:2014 with appropriate severity level:	(See appended table 30.2)	P
	- 750 °C, for connections carrying a current exceeding 0,5 A during normal operation		P
	- 650 °C, for other connections		P
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least:		—
	- 750 °C, for connections carrying a current exceeding 0,5 A during normal operation		N/A
	- 650 °C, for other connections		N/A
	The glow-wire test is also not carried out on small parts. These parts are to:		—
	- comprise material having a glow-wire flammability index of at least 750 °C, or 650 °C as appropriate, or		N/A
	- comply with the needle-flame test of normative Annex E, or	(See appended table 30.2/30.2.4)	N/A
	- comprise material classified as V-0 or V-1 according to IEC 60695-11-10..... :		N/A
	Glow-wire test not applicable to conditions as specified..... :		N/A
30.2.3	Not applicable (IEC 60335-2-79:2021)		N/A
30.2.4	Base material of printed circuit boards subjected to the needle-flame test of normative Annex E	(See appended table 30.2/30.2.4)	N/A
	Test not applicable to conditions as specified :	V-0	P
31	RESISTANCE TO RUSTING		
	Relevant ferrous parts adequately protected against rusting		P
	Tests specified in part 2 when necessary		N/A
32	RADIATION, TOXICITY AND SIMILAR HAZARDS		
32.1	Appliance does not emit harmful radiation or present a toxic or similar hazard due to their operation in normal use		P
	Compliance is checked by the limits or tests specified in part 2, if relevant		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
32.2	Appliance do not present an optical radiation hazard due to their operation in normal use		N/A
	Requirement does not apply to lamps and lamp systems that comply with 24.1.10		N/A
	Compliance checked as follows, appliance supplied at rated voltage:		—
	- Radiation assessment at or recalculated to 200 mm distance or at fixed use distance, measurement as described in IEC 62471:2006		N/A
	- For lamps or lamp systems intended to illuminate objects, tested at the GLS assessment distance producing 500 lux as described in IEC 62471:2006		N/A
	- Appliance complies with exempt group classification requirements of IEC 62471:2006 regarding actinic ultraviolet hazard (E_s) and near-UV hazard (E_{UVA})		N/A
A	ANNEX A (INFORMATIVE) ROUTINE TESTS		
	Description of routine tests to be carried out by the manufacturer		P
B	ANNEX B (NORMATIVE) BATTERY-OPERATED APPLIANCES, SEPARABLE BATTERIES AND DETACHABLE BATTERIES FOR BATTERY-OPERATED APPLIANCES		
	The following modifications to this standard are applicable to:		—
	- battery-operated appliances and remote controls employing non-rechargeable batteries (primary batteries)		N/A
	- battery-operated appliances and remote controls employing rechargeable batteries (secondary batteries)		N/A
	- detachable and separable batteries for battery-operated appliances		N/A
B.3.1.1	Battery-operated appliance operated under the following conditions:		—
	- for appliances operated with detachable or separable batteries disconnected from the appliance for charging, appliance operated to perform its intended function with a fully charged battery, the battery being the model or type reference of the battery provided or indicated in the instructions		N/A
	- for appliances operated with integral or separable batteries not disconnected from the appliance for charging, and that cannot perform their intended function while batteries are being charged, appliance operated to perform its intended function with a fully charged battery		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	- for appliances operated with replaceable batteries, including integral replaceable batteries, or non-rechargeable batteries, appliance operated to perform its intended function with the artificial source described in B5.3, upper limit short circuit current capacity specified in Table B.1		N/A
B.3.6.1	Non-rechargeable battery: battery is supplied in a fully charged state and cannot be recharged after		N/A
5.2	Tests of B.19.1 to B.19.6 may be carried out on separate samples		N/A
5.8.1	This subclause is not applicable		N/A
5.8.2	This subclause is not applicable		N/A
5.8.3	This subclause is not applicable		N/A
5.8.4	This subclause is not applicable		N/A
B.5.1	Before starting a test requiring a fully charged battery, battery fully charged, disconnected from source and allowed to rest between 2 h and 6 h		N/A
B.5.2	Specification of a rated voltage implies the use of a fully charged battery		N/A
	For battery-operated appliances, where the supply terminal connecting the battery have no indication of polarity, the more unfavourably polarity applied, unless		N/A
	such a connection unlikely to occur due to the construction of the appliance		N/A
B.5.3	When specified that a battery provided with or intended for the appliance may be replaced by an artificial source, that source consists of a DC power supply or a specially constructed battery, output of each as described in Table B.1 for the relevant battery type		N/A
6.1	Battery-operated appliances without a supply connection or a functional earth connection not classified with respect to protection against electric shock		N/A
6.2	Battery-operated high pressure cleaners shall be IPX5 (IEC 60335-2-79:2021)		N/A
7.1	Battery-operated appliances and remote controls containing batteries marked with the:		—
	- name, trademark or identification mark of the manufacturer or responsible vendor		N/A
	- model or type reference		N/A
	- IP number according to degree of protection against ingress of water, other than IPX0 :		N/A
	- type reference of the battery, if battery either not recharged in the appliance or non-rechargeable		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances incorporating replaceable batteries marked with:		—
	- battery type reference		N/A
	- battery voltage (V) :		N/A
	- polarity of the terminals, unless		N/A
	incorrect insertion of battery by the user unlikely to occur due to the construction of the appliance		N/A
	If more than one battery type can be used with the appliance, except for machines with hardwired battery sets, appliance marked with the type reference of at least one of the battery types that can be used, together with: (IEC 60335-2-79:2021)		—
	- symbol ISO 7000-0790 (2004-01), or		N/A
	- the substance of the following:		—
	See instruction manual for additional battery types.		N/A
	If appliances use more than one battery, appliance marked to indicate correct polarity connection of the batteries		N/A
	If relevant, positive terminal indicated by symbol IEC 60417-5005 (2002-10), and		N/A
	negative terminal indicated by symbol IEC 60417-5006 (2002-10)		N/A
	Detachable and separable batteries marked with:		—
	- name, trade mark or identification mark of the manufacturer or responsible vendor		N/A
	- model or type reference		N/A
	- IP number according to degree of protection against ingress of water, other than IPX0 :		N/A
	Detachable and separable batteries disconnected from the appliance for charging the battery marked with:		—
	- symbol ISO 7000-0790 (2004-01)		N/A
	- symbol IEC 60417-6413 (2019-05)		N/A
	- model or type reference of the battery charger, or the substance of the following:		N/A
	Use only with <model or type reference> battery charger..... :		N/A
	If more than one battery charger can be used to charge a detachable and separable battery disconnected from the appliance for charging, battery marked with the type reference of at least one of the battery charges that can be used, together with		N/A
	either symbol ISO 7000-0790 (2004-01), or the substance of the following:		N/A
	See instruction manual for additional battery chargers.		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Batteries that are user replaceable, other than general purpose batteries, marked with the:		—
	- name, trademark or identification mark of the manufacturer or responsible vendor		N/A
	- model or type reference		N/A
	- nominal voltage (V) :		N/A
7.6	Additional symbols		N/A
7.12	Instructions provided with the appliance		N/A
	For appliances intended for use at altitudes exceeding 2 000 m, maximum altitude stated		N/A
	If necessary, appropriate details on precautions during user maintenance stated		N/A
	The instructions state the substance of the following:		—
	This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.		N/A
	For appliances incorporating batteries intended to be removed for charging or intended to be replaced by the user and that can be contained in the small parts cylinder, the instructions state the substance of the following:		—
	WARNING: Keep out of reach of children. Swallowing can lead to chemical burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion. Seek medical attention immediately.		N/A
	For appliances intended for use with batteries that use metal-ion chemistries, the instructions state the normal temperature range for charging		N/A
	For battery-operated appliances, the instructions contain the following information, as applicable:		—
	- battery type		N/A
	- details regarding safe disposal of used batteries		N/A
	- how to deal with leaking batteries		N/A
	For battery-operated appliances, the instructions contain the substance of the following:		—
	- do not expose the appliance or battery to excessive temperatures		N/A
	- be aware of the risk of terminals of the battery-operated appliance or battery being short-circuited by metal objects		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	For battery-operated appliances containing non-rechargeable batteries, the instructions state the substance of the following:		—
	This appliance contains non-rechargeable batteries, these batteries are not to be recharged.		N/A
	For battery-operated appliances containing non-user-replaceable batteries, the instructions state the substance of the following:		—
	This appliance contains batteries that are only replaceable by skilled persons.		N/A
	For battery-operated appliances containing non-replaceable batteries, the instructions state the substance of the following:		—
	This appliance contains batteries that are non-replaceable. When the battery is at end of life, the appliance shall be properly disposed of.		N/A
	For battery-operated appliances incorporating batteries intended to be removed for charging or replaced by the user, the instructions include, as applicable, the substance of the following:		—
	- rechargeable batteries are to be removed from the appliance before being charged		N/A
	- different types of batteries or new and used batteries are not to be mixed		N/A
	- exhausted batteries are to be removed from the appliance and safely disposed of		N/A
	- if the appliance is to be stored unused for a long period, the batteries should be removed		N/A
	- do not use non-rechargeable batteries in place of rechargeable batteries		N/A
	- do not use modified or damaged batteries		N/A
	For battery-operated appliances incorporating batteries intended to be removed for charging or replaced by the user, the instructions include, as applicable, the following information:		—
	- battery type reference		N/A
	- orientation of the battery with regard to polarity		N/A
	- method of replacing batteries including maintaining correct polarity		N/A
	For battery-operated appliances incorporating batteries intended to be removed prior to disposal of the appliance, the instructions include details regarding their safe removal and disposal		N/A
	For battery-operated appliances that use detachable and separable batteries disconnected from the appliance for charging, the instructions include the model or type reference of the battery charger to be used, along with the substance of the following:		N/A
	WARNING: Use only with <model or type reference> battery charger.		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	If the symbol for battery charger is used, its meaning is explained		N/A
7.15	Markings specified for batteries intended to be replaced by the user are in or adjacent to the battery compartment		N/A
	Marking to indicate correct polarity connection of the batteries specified for appliances using more than one general purpose battery is in or adjacent to the battery compartment		N/A
	Type reference of battery charger placed next to symbol IEC 60417-6413 (2019-05)		N/A
8	This clause is not applicable to the appliance functional part of a battery-operated appliance and its batteries, providing the battery circuits do not have an earth or mains connection		N/A
10.1	This subclause is not applicable		N/A
10.2	This subclause is not applicable		N/A
11.1	N/A Battery operated appliances, their surroundings, and batteries not attaining excessive temperatures in normal use		N/A
	Compliance tested under the conditions specified in B.11.1, 11.2, 11.3, 11.7 and 11.8		N/A
11.4	This subclause is not applicable		N/A
11.5	This subclause is not applicable		N/A
11.6	This subclause is not applicable		N/A
B.11.1	Battery-operated appliances tested under the conditions of normal operation		N/A
	For appliances operated with detachable or separable batteries disconnected for charging, appliance operated until depletion of battery and test repeated with fully charged battery until it depletes or until temperature rises have stabilized as specified, whichever occurs first		N/A
	For appliances incorporating integral or separable batteries not disconnected for charging, and that cannot perform while batteries are being charged, appliance operated until depletion of batteries		N/A
	For appliances operated with replaceable or non-rechargeable batteries, appliance operated until the minimum capacity of the battery as specified in Table B.1 has been delivered or until steady conditions are established, whichever occurs first		N/A
19.1	For battery-operated appliances, instead of the tests specified, tests of 19.2, 19.4, 19.7, 19.9, 19.11, 19.12, 19.14, 19.15, B.19.1 to B.19.5		N/A
	Detachable and separable batteries also subjected to the test of B.19.6		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	For battery-operated appliances, tests carried out under normal operation		N/A
19.2	Appliances with heating elements tested under the conditions specified in Clause 11 but with restricted heat dissipation		N/A
B.19.2	This subclause is not applicable for machines with hardwired battery sets (IEC 60335-2-79:2021)		N/A
19.7	Battery-operated appliance switched on and operated under stalled conditions by:		—
	- locking the rotor of appliances for which the locked rotor torque is smaller than the full load torque		N/A
	- locking moving parts of other appliances		N/A
	If an appliance has more than one motor, test carried out for each motor separately		N/A
	Test conducted at both I_{sc} (high) and I_{sc} (low), if testing with the artificial source described in B.5.3		N/A
	Test conducted:		—
	- until the test sample achieves a steady condition, including returning to room temperature, or		N/A
	- until at a time period of at least 3 h has elapsed		N/A
19.11	Electronic circuits checked by evaluation of the fault conditions specified in 19.11.2 for all circuits or parts of circuits, unless they comply with the conditions specified in 19.11.1		N/A
	Appliances having a device with an off position obtained by electronic disconnection, or a device that can place the appliance in a stand-by mode, subjected to the tests of 19.11.4		N/A
	If the safety of the appliance under any of the fault conditions depends on the operation of a miniature fuse-link complying with IEC 60127, test of 19.12 carried out, and		N/A
	the appliance complies with the conditions specified in 19.13		N/A
	If a conductor of a printed circuit board becomes open-circuited, the appliance is considered to have withstood the particular test, provided that the base material of the printed circuit board withstands the test of normative Annex E		N/A
19.11.2	When any of the fault conditions simulated, duration of test until steady conditions		N/A
19.11.4	Appliances having a device with an off position obtained by electronic disconnection, or a device that can be placed in the stand-by mode, subjected to the tests of 19.11.4.1 and 19.11.4.2		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Tests carried out with the appliance supplied by a fully charged battery, the device being set in the off position or in the stand-by mode		N/A
	Appliances incorporating a protective electronic circuit subjected to the tests of 19.11.4.1 and 19.11.4.2		N/A
	Tests carried out after the protective electronic circuit has operated during the relevant tests of Clause 19 except 19.2 and 19.11.3		N/A
19.11.4.8	Battery operated appliances are supplied with a fully charged battery, operated under normal operation for 60 s, and then subjected to a 60 s interruption of the battery current		N/A
	When battery current restored, the appliance:		—
	- continues to operate normally from the same operation cycle point reached before the battery supply was interrupted, or		N/A
	- does not continue operating without requiring manual intervention to restart from the same operating cycle point reached before the battery supply was interrupted, or		N/A
	- does not continue operating without requiring manual intervention to restart from the part of the cycle selected by the user		N/A
19.13	During tests, no flames, molten metal or poisonous or ignitable gas in hazardous amounts and temperature rises not exceeding the values shown in Table 9		N/A
	No explosion or ignition of the battery during or after the test		N/A
	Venting of cells permitted through their vents		N/A
	After the tests, and when the appliance has cooled to room temperature, compliance with B.22.3 and B.22.5 not impaired and the appliance complies with 20.2 and Clause 29, if still operable		N/A
	For appliances immersed in or filled with conducting liquid in normal use, appliance immersed in or filled with water for 24 h before the test of B.22.5		N/A
	No dangerous malfunction and no failure of protective electronic circuits, if still operable		N/A
	Appliances tested with an electronic switch in the off position:		—
	- do not become operational, or		N/A
	- do not result in a dangerous malfunction during or after the tests of 19.11.4, if they become operational		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	In an appliance containing lids or doors controlled by one or more interlocks, one of the interlocks may be released if both of the following conditions are fulfilled:		—
	- no movement to an open position when released		N/A
	- no restart after the cycle in which it was released		N/A
19.15	For battery-operated appliances incorporating a manual voltage selector switch intended to select battery voltage, switch set to lowest voltage position and highest voltage applied		N/A
B.19.1	Supply terminals of a battery-operated appliance having an indication of polarity connected to the battery terminals of opposite polarity, unless		N/A
	connection by the user unlikely to occur		N/A
B.19.2	For battery-operated appliances with provision for multiple batteries, one or more of the batteries reversed and appliance operated, if reversal by the user of battery polarity allowed by the construction		N/A
B.19.3	For battery-operated appliances with motor(s), terminals of each motor short circuited one at a time, where the resistance of the short-circuit does not exceed 10 m Ω and while operated under the conditions of Clause 11		N/A
	Test conducted until steady conditions are achieved, including returning to room temperature or until a time period of at least 3 h		N/A
B.19.4	Test conducted with all the cells of the battery fully charged and, for batteries consisting of more than one cell, one cell fully discharged on a detachable or separable battery connected to the appliance or on an appliance containing an integral battery		N/A
	Main discharge connections of the battery shorted with a resistance not to exceed 10 m Ω , conducted until a non-self-resetting protection device operates or an intentionally weak part becomes permanently open-circuited or until the test sample returns to room temperature		N/A
B.19.5	Battery-operated appliance and any cords except supply cords, as appropriate, tested with the battery connected, under the following fault conditions applied one at a time:		—
	- any cord provided between the battery-operated appliance and a separable battery is short-circuited at the point along its length likely to produce the most adverse effects		N/A
	- for appliances having replaceable batteries that are replaceable and that can be removed without the aid of a tool, and having terminals that can be short-circuited by a thin straight bar, the terminals of the battery are short-circuited		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	- charging terminals of the battery-operated appliance that are simultaneously accessible with the test probe 13 of IEC 61032 are short circuited so as to produce the most unfavourable result		N/A
	Battery-operated appliance switched on and no additional mechanical load applied		N/A
	Tests conducted until the test sample achieves a steady condition, including returning to room temperature or, until a time period of at least 3 h		N/A
	Resistance of short circuit not exceeding 10 m Ω		N/A
B.19.6	For detachable and separable batteries, combinations of terminals simultaneously accessible by applying the test probe 13 of IEC 61032 short circuited so as to produce the most unfavourable result		N/A
B.20.1	The enclosure of a battery-operated appliance incorporating an integral battery that uses metal-ion chemistry withstands the pressure generated when a cell vents during failure		N/A
	Compliance checked by inspection after the tests of Clause 19 for batteries with a capacity less than 0,2 Ah, and measurement or test as specified		N/A
B.20.2	The enclosure of detachable and separable batteries that use metal-ion chemistries withstands the pressure generated when a cell vents during failure; tests as specified		N/A
	Compliance checked by inspection after the tests of Clause 19 for batteries with a capacity less than 0,2 Ah, and measurement or test as specified		N/A
21.1	Battery-operated appliances have adequate mechanical strength and are constructed to withstand rough handling expected in normal use		N/A
	Appliance fitted with fully charged batteries and rigidly supported subjected to test Ehb of IEC 60068-2-75, three blows of 0,5 J applied to every point of the appliance enclosure likely to be weak		N/A
	If necessary, blows also applied to handles, levers, knobs and similar parts and to signal lamps and their covers, but only if the lamps or covers protrude from the enclosure by more than 10 mm or if their surface area exceeds 4 cm ²		N/A
	Lamps within the appliance and their covers only tested if likely to be damaged in normal use		N/A
	When applying the release cone to the guard of a visibly glowing heating element, the hammer head passing through the guard does not strike the heating element		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	In case of doubt, defect neglected and the group of three blows applied to the same place on a new sample which then withstands the test		N/A
	Hand-held battery-operated appliances also subjected to test free-fall - procedure 1, of IEC 60068-2-31, under the specified conditions		N/A
	Free-fall test does not cause the appliance to catch fire, leak fluid visible from the outside or explode and meets the requirements of Clause 20, Clause 29, B.22.3 and B.22.5 where short circuit of functional insulation will impair compliance with this standard		N/A
B.21.1	Separable and detachable batteries, when not connected to the appliance, have adequate mechanical strength and are constructed to withstand rough handling expected in normal use		N/A
	Fully charged battery, rigidly supported, subject to test Ehb of IEC 60068-2-75, three blows of 0,5 J applied to every point of the battery enclosure likely to be weak		N/A
	In case of doubt, defect neglected and the group of three blows applied to the same place on a new sample which then withstands the test		N/A
	Detachable and separable batteries subjected to the test free-fall - procedure 1, of IEC 60068-2-31, under the conditions as specified		N/A
	Free-fall test does not damage the battery or cause it to catch fire, leak fluid visible from the outside or explode and meets the requirements of Clause 20, Clause 29, B.22.4 and B.22.5 where short circuit of functional insulation will impair compliance with this standard		N/A
	For batteries using metal-ion chemistry:		—
	- open circuit voltage of the battery 24 h after the tests not less than 90 % of the voltage measured immediately prior to the tests		N/A
	- cells only vented through their vents		N/A
22.11	Non-detachable parts that protect against electric shock, moisture or contact with moving parts reliably are fixed and withstand the mechanical stress occurring during normal use		N/A
	Snap-in devices used for fixing such parts have an obvious locked position		N/A
	Fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing reliable		N/A
22.20	Direct contact between current carrying parts and thermal insulation that would impair compliance with this standard effectively prevented, unless		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	such material is noncorrosive, non-hygroscopic and non-combustible		N/A
	Not applicable to glass-wool thermal insulation		N/A
22.24	Not applicable to battery-operated appliances that do not contain parts requiring protection against simultaneous contact according to B.22.3		N/A
22.25	Not applicable to battery-operated appliances that do not contain parts requiring protection against simultaneous contact according to B.22.3		N/A
22.26	This subclause is not applicable		N/A
22.27	This subclause is not applicable		N/A
22.28	This subclause is not applicable		N/A
22.29	This subclause is not applicable		N/A
22.30	This subclause is not applicable		N/A
22.31	This subclause is not applicable		N/A
22.32	This subclause is not applicable		N/A
22.33	Conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with accessible metal parts are not in direct contact with current carrying parts or unearthed metal parts that are separated from current carrying parts by basic insulation only or with other current carrying parts such that compliance with B.22.3 and B.22.4 would be impaired		N/A
22.34	This subclause is not applicable		N/A
22.35	This subclause is not applicable		N/A
22.36	This subclause is not applicable		N/A
22.37	This subclause is not applicable		N/A
B.22.1	User accessible interfaces between elements of a battery system (not mains connections) do not employ appliance couplers according to IEC 60320 (all parts) or IEC 60309-2		N/A
	User accessible interfaces between elements of a battery system (not mains connections) do not employ connectors of the following types unless the battery system is adequately protected against the use of an incorrect supply:		—
	- barrel connectors with outside diameters of 6,5 mm or less		N/A
	- concentric connectors with a diameter of 3,5 mm or less according to IEC 60603-11		N/A
	Compliance checked by inspection, measurement and for determining adequacy of protection against use of an incorrect supply, by the test as specified		N/A
	Source selected such that its current capability does not limit the charging of the battery		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	During the application of incremental voltages, the appliance is either operating normally or, if not, does not emit flames, molten metal, or poisonous or ignitable gas in hazardous amounts and temperature rises do not exceed the values shown in Table 9		N/A
	No explosion or ignition of the battery during or after the test		N/A
	Venting of cells permitted through their vents		N/A
B.22.2	External surfaces of detachable and separable batteries protected against excessive heat from heat sources (directly or via heated discharge air) present during operation of the appliance		N/A
B.22.3	Battery-operated appliances so constructed and enclosed that there is adequate protection against simultaneous contact with two or more conductive parts where the:		—
	- voltage between them exceeds 42,4 V		N/A
	- current between the conductive parts exceeds 2 mA for DC or 0,7 mA peak for when ripple exceeds 10 %		N/A
	Compliance checked with test probe B and test probe 18 of IEC 61032 as described		N/A
	Detachable parts except lamps behind a detachable cover removed during the tests with test probe B, however		N/A
	during insertion or removal of lamps located behind a detachable cover, protection against simultaneous contact with parts having a voltage between them exceeding 42,4 V ensured		N/A
	During the tests with test probe 18, appliance fully assembled as in normal use, no parts removed		N/A
	However, test probe 18 not applied to appliances for commercial use, unless		N/A
	intended to be installed in an area open to the public		N/A
	Not possible to touch two or more conductive parts of opposite polarity with the probes if the voltage between them exceeds 42,4 V and the current between them exceeds 2 mA for DC or 0,7 mA peak for when ripple exceeds 10 %		N/A
	Current measured using the circuit in Figure 4 of IEC 60990:2016		N/A
B.22.4	Separable and detachable batteries so constructed and enclosed that there is adequate protection against simultaneous contact with two or more conductive parts where the:		—
	- voltage between them exceeds 42,4 V		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	- current between the conductive parts exceeds 2 mA		N/A
	Compliance checked with test probe B and test probe 18 of IEC 61032 as described		N/A
	During the tests with:		—
	- test probe B, all detachable parts removed		N/A
	- test probe 18, no parts removed		N/A
	However, test probe 18 not applied to appliances for commercial use, unless		N/A
	intended to be installed in an area open to the public		N/A
	Not possible to touch two or more conductive parts of opposite polarity with the probes if the voltage between them exceeds 42,4 V and the current between them exceeds 2 mA		N/A
	Current measured using the circuit in Figure 4 of IEC 60990:2016		N/A
B.22.5	Insulating materials providing protection against simultaneous contact with two or more conductive parts are adequate when:		—
	- they are within 1,0 mm of the conductive parts		N/A
	- the voltage between the conductive parts exceeds 42,4 V peak		N/A
	- the current between the conductive parts exceeds 2 mA for DC or 0,7 mA peak for when ripple exceeds 10 %		N/A
	Insulating material subjected to voltage test as specified at 750 V or 1,2 times the working voltage plus 700 V, whichever greater, in accordance with IEC 61180 (V)		N/A
	No breakdown during the test		N/A
	Current measured using the circuit in Figure 4 of IEC 60990:2016		N/A
B.22.6	Vents of cells not obstructed such that their operation is defeated if venting is relied upon compliance with this standard		N/A
23.3	Instead of the electric strength test of 16.3, battery-operated appliances comply with B.22.3		N/A
23.5	For battery-operated appliances compliance is checked by the test of B.22.5		N/A
24.1	Batteries are not required to comply with IEC 62133-1:2017 or IEC 62133-2:2017, they are tested as part of the appliance according to this standard		N/A
24.1.1	This subclause is not applicable		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
24.1.3	Switches in battery-operated appliances have adequate breaking capacity and withstand, without excessive wear or other harmful effect, the mechanical, electrical, and thermal stresses occurring in the battery-operated appliance		N/A
	Tests as described and according to the relevant standard for switches, IEC 61058-1-1:2016 for mechanical switches and IEC 61058-1-2:2016 for electronic switches		N/A
	Required cycles of operation completed, no electrical or mechanical failure		N/A
	At the end of the tests:		—
	- switch contacts operating properly in the "on" and "off" positions		N/A
	- temperature rise of the switch terminals not increased by more than 30 K above the temperature rise measured in Clause 11		N/A
B.24.1	The relevant standards for non-acid based electrolyte cells employed in batteries are IEC 62133-1:2017 for nickel systems and IEC 62133-2:2017 for lithium systems		N/A
	A battery that uses metal-ion chemistry is additionally subjected to the tests of subclauses 7.3.8.1 (vibration) and 7.3.8.2 (mechanical shock) of IEC 62133-2:2017		N/A
25.9	The requirement also applies to interconnection cords of battery-operated appliances		N/A
25.14	The requirement also applies to interconnection cords of battery-operated appliances		N/A
25.15	The requirement also applies to interconnection cords of battery-operated appliances		N/A
B.25.1	Insulated conductors of interconnection cords of battery-operated appliances comply with the requirements for internal wiring and are provided with at least 0,5 mm thick outer sheath made of insulating material equivalent to that of supply cords described in 25.7		N/A
B.26.1	Terminal devices in an appliance for the connection of the flexible leads or flexible cord connecting a separable battery so located or shielded that there is no risk of incorrect connection		N/A
27.1	The battery-operated appliance does not have a provision for a protective earth but may incorporate a functional earth.		N/A
29.1	Clearances not less than the values specified in Table 16, taking into account the rated impulse voltage		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	For battery-operated appliances, the rated impulse voltage is 500 V for working voltages less than 50 V and 1 500 V for all other working voltages		N/A
	However, if the construction, including between parts of opposite polarity for connecting the battery, is such that the distances could be affected by wear, by distortion, by movement of the parts or during assembly, the clearances for rated impulse voltages of 1 500 V are increased by 0,5 mm and the impulse voltage test is not applicable		N/A
B.29.1.1	For parts requiring protection against simultaneous contact according to B.22.3 and B.22.4, the sum total of the clearances between each of these parts and their nearest accessible surface is not less than two times the Table 16 clearance taking into account the rated impulse voltage		N/A
	For the purpose of this determination, at least one of the clearances is not less than 1,0 mm.		N/A
B.29.2.1	For parts requiring protection against simultaneous contact according to B.22.3 and B.22.4, the sum total of the creepage distances between each of these parts and their nearest accessible surface is not less than two times the Table 17 creepage distances.		N/A
	For the purpose of this determination, at least one of the creepage distances is not less than 1,0 mm		N/A
30.1	External parts of non-metallic material, the deterioration of which might cause the battery-operated appliance, separable battery or detachable battery to fail to comply with this annex, are sufficiently resistant to heat		N/A
C	ANNEX C (NORMATIVE) AGEING TEST ON MOTORS		
	Tests, as described, carried out when doubt with regard to the temperature classification of the insulation of a motor winding		N/A
	Test conditions as specified		N/A
D	ANNEX D (NORMATIVE) THERMAL MOTOR PROTECTORS		
	Applicable to appliances having motors that incorporate thermal motor protectors necessary for compliance with the standard		N/A
	Test conditions as specified		N/A
E	ANNEX E (NORMATIVE) NEEDLE-FLAME TEST		
	Needle-flame test carried out in accordance with IEC 60695-11-5:2016, with the following modifications:		—
7	Flame application times		—

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	The duration of application of the test flame is $30\text{ s} \pm 1\text{ s}$		N/A
9	Test procedure		—
9.2	The specimen so arranged that the flame can be applied to a vertical or horizontal edge as shown in the examples of Figure 2		N/A
9.3	The first paragraph does not apply		N/A
	If possible, the flame is applied at least 10 mm from a corner		N/A
9.4	The test is carried out on one specimen		N/A
	If the specimen does not withstand the test, the test may be repeated on two additional specimens, both withstanding the test		N/A
11	Evaluation of test results		—
	The duration of burning not exceeding 30 s		N/A
	However, for printed circuit boards, the duration of burning not exceeding 15 s		N/A
F	ANNEX F (NORMATIVE) CAPACITORS		
	Capacitors likely to be permanently subjected to the supply voltage, and used for radio interference suppression or voltage dividing, comply with the following clauses of IEC 60384-14:2013 including IEC 60384-14:2013/AMD1:2016, with the following modifications:		—
1.5	Terms and definitions		—
1.5.3	Class X capacitors tested according to subclass X2		N/A
1.5.4	Class Y capacitors tested according to subclass Y2		N/A
1.6	Marking		—
	Items a) and b) are applicable		N/A
3.4	Approval testing		—
3.4.3.2	Table 3 is applicable as described		N/A
4.1	Visual examination and check of dimensions		—
	This subclause is applicable		N/A
4.2	Electrical tests		—
4.2.1	This subclause is applicable		N/A
4.2.5	This subclause is applicable		N/A
4.2.5.2	Only Table 11 is applicable		N/A
	Values for test A apply		N/A
	However, for capacitors in heating appliances the values for test B or C apply		N/A
4.12	Damp heat, steady state		—
	This subclause is applicable		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Only insulation resistance and voltage proof are checked		N/A
4.13	Impulse voltage		—
	This subclause is applicable		N/A
4.14	Endurance		—
	Subclauses 4.14.1, 4.14.3, 4.14.4 and 4.14.7 are applicable		N/A
4.14.7	Only insulation resistance and voltage proof are checked		N/A
	No visible damage		N/A
4.17	Passive flammability test		—
	This subclause is applicable		N/A
4.18	Active flammability test		—
	This subclause is applicable		N/A
G	ANNEX G (NORMATIVE) SAFETY ISOLATING TRANSFORMERS		
	The following modifications to this standard are applicable for safety isolating transformers:		—
7	Marking and instructions		—
7.1	Transformers for specific use marked with the:		—
	- name, trademark or identification mark of the manufacturer or responsible vendor..... :		N/A
	- model or type reference :		N/A
17	Overload protection of transformers and associated circuits		—
	Fail-safe transformers comply with subclause 15.5 of IEC 61558-1:2017		N/A
22	Construction		—
	Subclauses 19.1 and 19.1.2 of IEC 61558-2-6:2009 are applicable		N/A
29	Clearances, creepage distances and solid insulation		—
29.1, 29.2, 29.3	The distances specified in Table 20, Table 21 and Table 22 of IEC 61558-1:2017 apply		N/A
	For insulated winding wires complying with subclause 19.12.3 of IEC 61558-1:2017 there are no requirements for clearances or creepage distances		N/A
	For windings providing reinforced insulation, the distances specified in Table 20 and Table 21 of IEC 61558-1:2017 are not assessed		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	For safety isolating transformers subjected to periodic voltages with a frequency exceeding 30 kHz, the clearances, creepage distances and solid insulation values specified in IEC 60664-4:2005 are applicable, if greater than the values specified in Table 20, Table 21 and Table 22 of IEC 61558-1:2017		N/A
H	ANNEX H (NORMATIVE) SWITCHES		
	Switches comply with the following clauses of IEC 61058-1:2016 and IEC 61058-1-1:2016, as modified below:		—
	The tests carried out under the conditions occurring in the appliance		P
	Before being tested, switches are operated 20 times without load		P
8	Marking and documentation		—
	Switches are not required to be marked		P
	However, a switch that can be tested separately from the appliance marked with the manufacturer's name or trademark and the type reference		P
13	Mechanism		—
	The tests can be carried out on a separate sample		P
15	Insulation resistance and dielectric strength		—
15.1	Not applicable		N/A
15.2	Not applicable		N/A
15.3	Applicable for full disconnection and micro-disconnection, test carried out immediately after the humidity test of subclause 15.3 of IEC 60335-1		P
17	Endurance		—
	Compliance is checked on three separate appliances or switches		P
	For 17.5.4 of IEC 61058-1-1:2016, the number of cycles of actuation declared according to 7.4 is 10 000, unless		P
	otherwise specified in 24.1.3 of IEC 60335-1 :		N/A
	Switches for operation under no load and which can be operated only by a tool, and		N/A
	switches operated by hand that are interlocked so that they cannot be operated under load,		N/A
	are not subjected to the tests		N/A
	However, switches without this interlock are subjected to the test of 17.5.4 of IEC 61058-1-1:2016 for 100 cycles of operation		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Subclauses 17.3 and 17.6.2 of IEC 61058-1-1:2016 not applicable		N/A
	The ambient temperature during the test is that occurring in the appliance during the test of Clause 11 in IEC 60335-1		P
	The temperature rise of the terminals not more than 30 K above the temperature rise measured in clause 11 of IEC 60335-1 (K) :	8,0	P
20	Clearances, creepage distances, solid insulation and coatings of rigid printed board assemblies		—
	Clause 20 of IEC 61058-1:2016 is applicable to clearances across full disconnection and micro-disconnection		P
	It is also applicable to creepage distances for functional insulation, across full disconnection and micro-disconnection, as stated in Table 14		P
I	ANNEX I (NORMATIVE) MOTORS HAVING BASIC INSULATION THAT IS INADEQUATE FOR THE RATED VOLTAGE OF THE APPLIANCE		
	The following modifications to this standard are applicable for motors having basic insulation that is inadequate for the rated voltage of the appliance:		—
8	Protection against access to live parts		—
8.1	Metal parts of the motor are considered to be bare live parts		N/A
11	Heating		—
11.3	The temperature rise of the body of the motor is determined instead of the temperature rise of the windings		N/A
11.8	The temperature rise of the body of the motor, where in contact with insulating material, not exceeding values in Table 3 for the relevant insulating material		N/A
16	Leakage current and electric strength		—
16.3	Insulation between live parts of the motor and its other metal parts is not subjected to the test		N/A
19	Abnormal operation		—
19.1	The tests of 19.7 to 19.9 are not carried out		N/A
I.19.1	Appliance operated at rated voltage with each of the following fault conditions:		—
	- short circuit of the terminals of the motor, including any capacitor incorporated in the motor circuit		N/A
	- short circuit of each diode of the rectifier		N/A
	- open circuit of the supply to the motor		N/A
	- open circuit of any parallel resistor, the motor being in operation		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Only one fault simulated at a time, the tests carried out consecutively		N/A
22	Construction		—
1.22.1	For class I appliances incorporating a motor supplied by a rectifier circuit, the DC circuit being insulated from accessible parts of the appliance by double or reinforced insulation		N/A
	Compliance checked by the tests specified for double and reinforced insulation		N/A
J	ANNEX J (NORMATIVE) COATED PRINTED CIRCUIT BOARDS		
	Protective coatings of printed circuit boards comply with IEC 60664-3:2016 with the following modifications:		—
5.1	General		—
	When production samples are used, three samples of the printed circuit board are tested		N/A
5.7.2	Cold conditioning		—
	The test is carried out at -25 °C		N/A
5.7.4	Rapid change of temperature		—
	Severity 1 is specified, the number of cycles is 5		N/A
5.7.5.2	Additional conditioning with respect to electromigration		—
	The test duration is 10 days		N/A
5.9	Additional tests		—
	This subclause is not applicable		N/A
K	ANNEX K (INFORMATIVE) OVERVOLTAGE CATEGORIES		
	The information on overvoltage categories is extracted from IEC 60664-1:2007		P
	Overvoltage category is a numeral defining a transient overvoltage condition		P
	Equipment of overvoltage category IV is for use at the origin of the installation		N/A
	Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements		N/A
	Equipment of overvoltage category II is energy consuming equipment to be supplied from the fixed installation		P
	If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	Equipment of overvoltage category I is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriately low level		N/A
L	ANNEX L (INFORMATIVE) GUIDANCE FOR THE MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES		
	Information for the determination of clearances and creepage distances		P
M	ANNEX M (INFORMATIVE) POLLUTION DEGREE		
	The information on pollution degrees is extracted from IEC 60664-1:2007		P
	Pollution		-
	The microenvironment determines the effect of pollution on the insulation, taking into account the macroenvironment		P
	Means may be provided to reduce pollution at the insulation by effective enclosures or similar		P
	Minimum clearances specified where pollution may be present in the microenvironment		P
	Degrees of pollution in the microenvironment		—
	For evaluating creepage distances, the following degrees of pollution in the microenvironment are established:		—
	- pollution degree 1: no pollution or only dry, non-conductive pollution occurs. The pollution has no influence		P
	- pollution degree 2: only non-conductive pollution occurs, except that occasionally a temporary conductivity caused by condensation is to be expected		P
	- pollution degree 3: conductive pollution occurs or dry non-conductive pollution occurs that becomes conductive due to condensation that is to be expected		P
	- pollution degree 4: the pollution generates persistent conductivity caused by conductive dust or by rain or snow		P
N	ANNEX N (NORMATIVE) PROOF TRACKING TEST		
	The proof tracking test is carried out in accordance with IEC 60112:2003 including IEC 60112:2003/AMD1:2009 with the following modifications:		—
7	Test apparatus		—
7.3	Test solutions		—
	Test solution A is used		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
10	Determination of proof tracking index (PTI)		—
10.1	Procedure		—
	Proof voltage of 100 V, 175 V, 400 V or 600 V :		P
	The test is carried out on five specimens		P
	In case of doubt, additional test with proof voltage reduced by 25 V, the number of drops increased to 100		N/A
10.2	Report		—
	The report states if the PTI value was based on a test using 100 drops with a test voltage of (PTI-25) V		N/A
O	ANNEX O (INFORMATIVE) SELECTION AND SEQUENCE OF THE TESTS OF CLAUSE 30		
	Description of tests for determination of resistance to heat and fire		—
P	ANNEX P (INFORMATIVE) GUIDANCE FOR THE APPLICATION OF THIS STANDARD TO APPLIANCES USED IN TROPICAL CLIMATES		
	Modifications applicable for class 0 and 0I appliances having a rated voltage exceeding 150 V, intended to be used in countries having a tropical climate and that are marked with symbol IEC 60417-6332 (2015-06)		—
	Modifications may also be applied to class I appliances having a rated voltage exceeding 150 V, intended to be used in countries having a tropical climate and that are marked with symbol IEC 60417-6332 (2015-06), if liable to be connected to a supply mains that excludes the protective earthing conductor		—
5.7	The ambient temperature for the tests of clauses 11 and 13 is 40 +3/0 °C		N/A
7.1	The appliance marked with symbol IEC 60417-6332 (2015-06)		N/A
7.6	Symbol IEC 60417-6332 (2015-06)		N/A
7.12	The instructions state that the appliance is to be supplied through a residual current device (RCD) having a rated residual operating current not exceeding 30 mA		N/A
	The instructions state that the appliance is considered to be suitable for use in countries having a tropical climate, but may also be used in other countries		N/A
	If symbol IEC 60417-6332 (2015-06) is used, its meaning is explained		N/A
11.8	The values of Table 3 are reduced by 15 K		N/A
13.2	The leakage current for class I appliances not exceeding 0,5 mA		N/A
15.3	The value of t is 37 °C		N/A
16.2	The leakage current for class I appliances not exceeding 0,5 mA (mA) :		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
19.13	The leakage current test of 16.2 is applied in addition to the electric strength test of 16.3		N/A
Q	ANNEX Q (INFORMATIVE) SEQUENCE OF TESTS FOR THE EVALUATION OF ELECTRONIC CIRCUITS		
	Description of tests for appliances incorporating electronic circuits		—
R	ANNEX R (NORMATIVE) SOFTWARE EVALUATION		
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2 validated in accordance with the requirements of this annex		N/A
R.1	Programmable electronic circuits using software		—
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2 constructed so that the software does not impair compliance with the requirements of this standard		N/A
R.2	Requirements for the architecture		—
R.2.1	General		—
R.2.1.1	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2 use measures to control and avoid software-related faults/errors in safety-related data and safety-related segments of the software		N/A
R.2.1.2	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in Table R.2 have one of the following structures:		N/A
	- single channel with periodic self-test and monitoring		N/A
	- dual channel (homogenous) with comparison		N/A
	- dual channel (diverse) with comparison		N/A
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in Table R.1 have one of the following structures:		—
	- single channel with functional test		N/A
	- single channel with periodic self-test		N/A
	- dual channel without comparison		N/A
R.2.2	Measures to control faults/errors		—
R.2.2.1	When redundant memory with comparison is provided on two areas of the same component, the data in one area is stored in a different format from that in the other area		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
R.2.2.2	Programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in Table R.2 and that use dual channel structures with comparison, have additional fault/error detection means for any fault/errors not detected by the comparison		N/A
R.2.2.3	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2, means are provided for the recognition and control of errors in transmissions to external safety-related data paths		N/A
R.2.2.4	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2, the programmable electronic circuits incorporate measures to address the fault/errors in safety-related segments and data indicated in Table R.1 and R.2 as appropriate		N/A
R.2.2.5	For programmable electronic circuits with functions N/A requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2, detection of a fault/error occurs before compliance with clause 19 is impaired		N/A
	For appliances intended for remote communication through public networks, where normative Annex U is applicable as determined by 22.62, detection of a fault/error occurs before compliance with normative Annex U is impaired		N/A
R.2.2.6	The software is referenced to relevant parts of the operating sequence and the associated hardware functions		N/A
R.2.2.7	Labels used for memory locations are unique		N/A
R.2.2.8	The software is protected from user alteration of safety-related segments and data		N/A
R.2.2.9	Software and safety-related hardware under its control is initialized and terminates before compliance with clause 19 is impaired		N/A
	For appliances intended for remote communication through public networks where normative Annex U is applicable as determined by 22.62, the software and safety-related hardware under its control is initialized and terminates before compliance with normative Annex U is impaired		N/A
R.3	Measures to avoid errors		—
R.3.1	General		—

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2, the following measures to avoid systematic faults in the software are applied		N/A
	Software that incorporates measures used to control the fault/error conditions specified in Table R.2 is inherently acceptable for software required to control the fault/error conditions specified in Table R.1		N/A
R.3.2	Specification		—
R.3.2.1	Software safety requirements:	Software Id:	N/A
	The specification of the software safety requirements includes the descriptions listed		N/A
R.3.2.2	Software architecture		—
R.3.2.2.1	The specification of the software architecture includes the aspects listed - techniques and measures to control software faults/errors (refer to R.2.2); - interactions between hardware and software; - partitioning into modules and their allocation to the specified safety functions; - hierarchy and call structure of the modules (control flow); - interrupt handling; - data flow and restrictions on data access; - architecture and storage of data; - time-based dependencies of sequences and data	Document ref. No:	N/A
R.3.2.2.2	The architecture specification is validated against the specification of the software safety requirements by static analysis		N/A
R.3.2.3	Module design and coding		—
R.3.2.3.1	Based on the architecture design, software is suitably refined into modules		N/A
	Software module design and coding is implemented in a way that is traceable to the software architecture and requirements		N/A
	The module design specifies:		—
	- function(s)		N/A
	- interfaces to other modules		N/A
	- data		N/A
R.3.2.3.2	Software code is structured		N/A
R.3.2.3.3	Coded software is validated against the module specification by static analysis		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	The module specification is validated against the architecture specification by static analysis		N/A
R.3.3	Software validation		—
	The software is validated with reference to the requirements of the software safety requirements specification		N/A
	Compliance is checked by simulation of:		—
	- input signals present during normal operation		N/A
	- anticipated occurrences		N/A
	- undesired conditions requiring system action		N/A
R.3.4	Management items		N/A
R.3.4.1	Management of software versions		N/A
	A software version management system at the module level is put in place		N/A
R.3.4.2	Software modification		N/A
R.3.4.2.1	Software modifications are based on a modification request which details the following:		—
	- the hazards which may be affected		N/A
	- the proposed change		N/A
	- the reasons for change		N/A
R.3.4.2.2	An analysis is carried out to determine the impact of the proposed modification on functional safety		N/A
R.3.4.2.3	A detailed specification for the modification is generated including the necessary activities for verification and validation, such as a definition of suitable test cases		N/A
R.3.4.2.4	The modification is carried out as planned		N/A
R.3.4.2.5	The assessment of the modification is carried out based on the specified verification and validation activities, which may include:		—
	- a reverification of changed software modules		N/A
	- a reverification of affected software modules		N/A
	- a revalidation of the complete system		N/A
R.3.4.2.6	All details of modification activities are documented		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict

TABLE R.1 – GENERAL FAULT/ERROR CONDITIONS						
Component ^a	Fault/error	Acceptable measures ^{b, c}	Definitions	Document reference for applied measure	Document reference for applied test	Verdict
1 CPU 1.1 Registers	Stuck at	Functional test, or periodic self-test using either: – static memory test, or – word protection with single bit redundancy	H.2.16.5 H.2.16.6 H.2.19.6 H.2.19.8.2			N/A
1.2 VOID						N/A
1.3 Programme counter	Stuck at	Functional test, or periodic self-test, or independent time-slot monitoring, or logical monitoring of the programme sequence	H.2.16.5 H.2.16.6 H.2.18.10.4 H.2.18.10.2			N/A
2 Interrupt handling and execution	No interrupt or too frequent interrupt	Functional test, or time-slot monitoring	H.2.16.5 H.2.18.10.4			N/A
3 Clock	Wrong frequency (for quartz synchronized clock: harmonics/ sub-harmonics only)	Frequency monitoring, or time slot monitoring	H.2.18.10.1 H.2.18.10.4			N/A
4 Memory 4.1 Invariable memory	All single bit faults	Periodic modified checksum, or multiple checksum, or word protection with single bit redundancy	H.2.19.3.1 H.2.19.3.2 H.2.19.8.2			N/A

IEC 60335-2-79						
Clause	Requirement + Test			Result - Remark		Verdict
4.2 Variable memory	DC fault	Periodic static memory test, or Word protection with single bit redundancy	H.2.19.6 H.2.19.8.2			N/A
4.3 Addressing (relevant to variable and invariable memory)	Stuck at	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A
5 Internal data path	Stuck at	Word protection with single bit redundancy	H.2.19.8.2			N/A
5.1 VOID						N/A
5.2 Addressing	Wrong address	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A
6 External communication 6.1 Data	Data corruption of up to Hamming distance 3	Word protection with multi-bit redundancy, or CRC – single word, or transfer redundancy, or protocol test	H.2.19.8.1 H.2.19.4.1 H.2.18.2.2 H.2.18.14			N/A
6.2 Addressing	Wrong address	Word protection with multi-bit redundancy including the address, or CRC – single word including the address, or transfer redundancy, or protocol test	H.2.19.8.1 H.2.19.4.1 H.2.18.2.2 H.2.18.14			N/A

IEC 60335-2-79						
Clause	Requirement + Test			Result - Remark		Verdict
6.3 Timing	Wrong point in time	Time-slot monitoring, or scheduled transmission	H.2.18.10.4 H.2.18.18			N/A
	Wrong sequence	Logical monitoring, or time-slot monitoring, or scheduled transmission	H.2.18.10.2 H.2.18.10.4 H.2.18.18			
7 Input/output periphery	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			N/A
7.1 VOID						N/A
7.2 Analog I/O						N/A
7.2.1 A/D and D/A converter	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			N/A
7.2.2 Analog multiplexer	Wrong addressing	Plausibility check	H.2.18.13			N/A
8 VOID						N/A
9 Custom chips ^d e.g. ASIC, GAL, gate array	Any output outside the static and dynamic functional specification	Periodic self-test	H.2.16.6			N/A
NOTE A Stuck-at fault model denotes a fault model representing an open circuit or a non-varying signal level. A DC fault model denotes a stuck-at fault model incorporating short circuits between signal lines.						
^a For fault/error assessment, some components are divided into their sub-functions. ^b For each sub-function in the table, the Table R.2 measure will cover the software fault/error. ^c Where more than one measure is given for a sub-function, these are alternatives. ^d To be divided as necessary by the manufacturer into sub-functions.						

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict

TABLE R.2 – SPECIFIC FAULT/ERROR CONDITIONS						
Component ^a	Fault/error	Acceptable measures ^{b, c}	Definitions	Document reference for applied measure	Document reference for applied test	Ver-dict N/A
1 CPU 1.1 Registers	DC fault	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or internal error detection, or redundant memory with comparison, or periodic self-tests using either – walkpat memory test – Abraham test – Transparent GALPAT test; or word protection with multi-bit redundancy, or static memory test and word protection with single bit redundancy	H.2.18.15 H.2.18.3 H.2.18.9 H.2.19.5 H.2.19.7 H.2.19.1 H.2.19.2.1 H.2.19.8.1 H.2.19.6 H.2.19.8.2			N/A
1.2 Instruction decoding and execution	Wrong decoding and execution	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or internal error detection, or periodic self-test using equivalence class test	H.2.18.15 H.2.18.3 H.2.18.9 H.2.18.5			N/A

IEC 60335-2-79						
Clause	Requirement + Test			Result - Remark		Verdict
1.3 Programme counter	DC fault	Periodic self-test and monitoring using either: – independent time-slot and logical monitoring – internal error detection, or comparison of redundant functional channels by either: – reciprocal comparison – independent hardware comparator	H.2.16.7 H.2.18.10.3 H.2.18.9 H.2.18.15 H.2.18.3			N/A
1.4 Addressing	DC fault	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator; or internal error detection; or periodic self-test using – a testing pattern of the address lines; or – a full bus redundancy – a multi bus parity including the address	H.2.18.15 H.2.18.3 H.2.18.9 H.2.16.7 H.2.18.22 H.2.18.1.1 H.2.18.1.2			N/A
1.5 Data paths instruction decoding	DC fault and execution	Comparison of redundant CPUs by either: – reciprocal comparison, or – independent hardware comparator, or – internal error detection, or – periodic self-test using a testing pattern, or – data redundancy, or – multi-bit bus parity	H.2.18.15 H.2.18.3 H.2.18.9 H.2.16.7 H.2.18.2.1 H.2.18.1.2			N/A

IEC 60335-2-79						
Clause	Requirement + Test			Result - Remark		Verdict
2 Interrupt handling and execution	No interrupt or too frequent interrupt related to different sources	Comparison of redundant functional channels by either – reciprocal comparison, – independent hardware comparator, or – independent time-slot and logical monitoring	H.2.18.15 H.2.18.3 H.2.18.10.3			N/A
3 Clock	Wrong frequency (for quartz synchronized clock: harmonics/ sub-harmonics only)	Frequency monitoring, or time-slot monitoring, or comparison of redundant functional channels by either: – reciprocal comparison – independent hardware comparator	H.2.18.10.1 H.2.18.10.4 H.2.18.15 H.2.18.3			N/A
4 Memory 4.1 Invariable memory	99,6 % coverage of all information errors	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or redundant memory with comparison, or periodic cyclic redundancy check, either – single word – double word, or word protection with multi-bit redundancy	H.2.18.15 H.2.18.3 H.2.19.5 H.2.19.4.1 H.2.19.4.2 H.2.19.8.1			N/A

IEC 60335-2-79						
Clause	Requirement + Test			Result - Remark		Verdict
4.2 Variable memory	DC fault and dynamic cross links	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or redundant memory with comparison, or periodic self-tests using either: – walkpat memory test – Abraham test – transparent GALPAT test, or word protection with multi-bit redundancy	H.2.18.15 H.2.18.3 H.2.19.5 H.2.19.7 H.2.19.1 H.2.19.2.1 H.2.19.8.1			N/A
4.3 Addressing (relevant to variable and invariable memory)	DC fault	Comparison of redundant CPUs by either: – reciprocal comparison, or – independent hardware comparator, or full bus redundancy testing pattern, or periodic cyclic redundancy check, either: – single word – double word, or word protection with multi-bit redundancy including the address	H.2.18.15 H.2.18.3 H.2.18.1.1 H.2.18.22 H.2.19.4.1 H.2.19.4.2 H.2.19.8.1			N/A

IEC 60335-2-79						
Clause	Requirement + Test			Result - Remark		Verdict
5 Internal data path 5.1 Data	DC fault	Comparison of redundant CPUs by either – reciprocal comparison – independent hardware comparator, or word protection with multi-bit redundancy including the address, or data redundancy, or testing pattern, or protocol test	H.2.18.15 H.2.18.3 H.2.19.8.1 H.2.18.2.1 H.2.18.22 H.2.18.14			N/A
5.2 Addressing	Wrong address and multiple addressing	Comparison of redundant CPUs by: – reciprocal comparison – independent hardware comparator, or word protection with multi-bit redundancy, including the address, or full bus redundancy; or testing pattern including the address	H.2.18.15 H.2.18.3 H.2.19.8.1 H.2.18.1.1 H.2.18.22			N/A
6 External communication 6.1 Data	Data corruption of up to Hamming distance 4	CRC – double word, or data redundancy or comparison of redundant functional channels by either – reciprocal comparison; or – independent hardware comparator	H.2.19.4.2 H.2.18.2.1 H.2.18.15 H.2.18.3			N/A

IEC 60335-2-79						
Clause	Requirement + Test			Result - Remark		Verdict
6.2 Addressing	Wrong address and multiple addressing	CRC – double word, including the address, or full bus redundancy of data and address, or comparison of redundant communication channels by either: – reciprocal comparison; or – independent hardware comparator	H.2.19.4.2 H.2.18.1.1 H.2.18.15 H.2.18.3			N/A
6.3 Timing	Wrong point in time Wrong sequence	Time-slot and logical monitoring, or comparison of redundant communication channels by either: – reciprocal comparison; or – independent hardware comparator Time-slot and logical monitoring, or comparison of redundant communication channels by either: – reciprocal comparison; or – independent hardware comparator	H.2.18.10.3 H.2.18.15 H.2.18.3 H.2.18.10.3 H.2.18.15 H.2.18.3			N/A
7 Input/output periphery 7.1 Digital I/O	Fault conditions specified in 19.11.2	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or input comparison, or multiple parallel outputs, or output verification, or testing pattern, or code safety	H.2.18.15 H.2.18.3 H.2.18.8 H.2.18.11 H.2.18.12 H.2.18.22 H.2.18.2			N/A

IEC 60335-2-79						
Clause	Requirement + Test			Result - Remark		Verdict
7.2 Analog I/O 7.2.1 A/D and D/A converter	Fault conditions in 19.11.2	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or input comparison, or multiple parallel outputs, or output verification, or testing pattern	H.2.18.15 H.2.18.3 H.2.18.8 H.2.18.11 H.2.18.12 H.2.18.22			N/A
7.2.2 Analog multiplexer	Wrong addressing	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or input comparison or testing pattern	H.2.18.15 H.2.18.3 H.2.18.8 H.2.18.22			N/A
8 Monitoring devices and comparators	Any output outside the static and dynamic functional specification	Tested monitoring, or redundant monitoring and comparison, or error recognizing means	H.2.18.21 H.2.18.17 H.2.18.6			N/A
9 Custom chips ^d e.g. ASIC, GAL, gate array	Any output outside the static and dynamic functional specification	Periodic self-test and monitoring, dual channel (diverse) with comparison, or error recognizing means	H.2.16.7 H.2.16.2 H.2.18.6			N/A
NOTE A DC fault model denotes a stuck-at fault model incorporating short circuits between signal lines.						
^a For fault/error assessment, some components are divided into their sub-functions. ^b For each sub-function in the table, the software measure will cover the Table R.1 fault/error. ^c Where more than one measure is given for a sub-function, these are alternatives. ^d To be divided as necessary by the manufacturer into sub-functions.						

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict

S	ANNEX S (INFORMATIVE) GUIDANCE FOR THE APPLICATION OF THIS STANDARD ON MEASUREMENT OF POWER INPUT AND CURRENT BASED ON THE REQUIREMENTS OF 10.1 AND 10.2 CONCERNING THE REPRESENTATIVE PERIOD		
	Flowchart giving guidance on measurement of power input and current concerning the representative period		—
T	ANNEX T (NORMATIVE) UV-C RADIATION EFFECT ON NON-METALLIC MATERIALS		
	This annex provides requirements for non-metallic materials subject to direct or reflected UV-C radiation (100 nm to 280 nm) exposure and whose mechanical and electrical properties are relied upon for compliance with this standard		N/A
	This annex does not apply to glass, ceramic and similar materials		N/A
	The conditioning and tests are carried out on non-metallic material specimens prepared according to the relevant standard for the test method		N/A
	The conditioning apparatus and test procedure are as specified in ISO 4892-1 and ISO 4892-2		N/A
	Modifications to the clauses of ISO 4892-1:2016:		—
5.1	Irradiance		N/A
5.1.1	The UV-C emitter is a low pressure mercury lamp with a quartz envelope having a continuous spectral irradiance of 10 W/m ² at 254 nm		N/A
5.2	Temperature		—
5.2.5	The black-panel temperature is 63 °C ± 3 °C		N/A
5.3	Humidity and wetting		—
5.3.1	Humidification of the chamber air is specified in part 2 when necessary		N/A
9	Test report		—
	This clause is not applicable		N/A
	Modifications to the clauses of ISO 4892-2:2013:		—
7	Procedure		—
7.1	General		—
	At least three test specimens of each non-metallic material providing mechanical support or impact resistance are exposed in each run		N/A
	Ten samples of the insulated internal wiring are exposed in each run		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	When the internal wiring is provided in more than one colour, the colour having the heaviest organic pigment loading is used		N/A
7.2	Mounting the test specimens		—
	The specimens are attached to the specimen holders such that they are not subject to any applied stress		N/A
7.3	Exposure		—
	Before placing the specimens in the test chamber, the apparatus is operating under the specified exposure conditions and programmed to operate continuously, conditions are maintained throughout the exposure		N/A
	The test specimens and, if used, the irradiance-measuring instrument are exposed for 1 000 h		N/A
7.4	Measurement of radiant exposure		—
	If used, a radiometer is mounted and calibrated such that it measures the irradiance at the exposed surface of the test specimen		N/A
7.5	Determination of changes in properties after exposure		—
	The non-metallic material properties and test methods for parts providing mechanical support or impact resistance are specified in Table T.1		N/A
	The non-metallic material properties and test method for electrical insulation of internal wiring are specified in Table T.2		N/A
8	Exposure report		—
	This clause is not applicable		N/A
U	ANNEX U (NORMATIVE) APPLIANCES INTENDED FOR REMOTE COMMUNICATION THROUGH PUBLIC NETWORKS		
	The measures given in this annex are intended to avoid unauthorized access and the effects of transmission failures via remote communication through public networks, where compliance with this standard could be impaired		N/A
	However, in general, it does not cover aspects concerning confidentiality of data and consumer privacy		N/A
U.1	Terms and definitions		—
U.1.1	Definitions relating to remote functionality		—
	Definitions used in this appendix as described		N/A
U.2	Marking and instructions		—

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
U.2.1	If there is provision for software download, instructions are provided on how or where to obtain the unique name or code given by the manufacturer, that identifies the current version of the software running in the appliance		N/A
	The instructions also include the necessary steps the user must follow for the software update procedure		N/A
U.3	Construction		—
U.3.1	Software enabling communication with a public network is partitioned into modules separate from software which is necessary to comply with the other requirements of this standard		N/A
U.3.2	Remote communication is established, implemented and terminated by the appliance via software that provides:		—
	- data integrity protection concerning:		N/A
	•data corruption		N/A
	•address corruption		N/A
	•wrong timing or sequence		N/A
	•permanent "auto-sending" or repetition		N/A
	•interruption of data transfer		N/A
	- means to detect and respond to communication in which, for any reason, a message being communicated is incomplete, truncated, contains errors or has the correct format but delivers information that is outside the range expected for that type of message		N/A
	- measures to control the fault/error conditions specified in Table R.1		N/A
U.3.3	Measures provided to protect against hazards arising from the reception of messages from several sources simultaneously or sequentially		N/A
U.3.4	Remote communication is not enabled prior to authorization		N/A
	Authorization is based on authentication using cryptographic techniques to ensure the identity of both parties		N/A
	For the purposes of this requirement, communication between two entities for preparation of the authentication and authorization process is not considered remote communication		N/A
U.3.5	Measures are taken to prevent unauthorized access and to detect transmission faults/errors in the remote communication		N/A

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
U.3.6	The safe operation of an appliance does not depend on remote communication		N/A
	In case of doubt, remote communication rendered inoperative for the relevant tests of this standard		N/A
U.3.7	Cryptographic techniques are implemented to provide data integrity protection once authorization for remote communication is established		N/A
	Cryptographic techniques employed are part of the appliance including its accessories, do not rely upon part of the router or similar data transmission device, and are performed prior to transmission		N/A
U.3.8	Provisions are taken to ensure that software updates provided by the manufacturer and transmitted to the appliance via remote communication are verified prior to its installation:		—
	- against corruption through communication		N/A
	- that the software version is compatible with the appliance for which the software version was designed		N/A
	The software which performs the above-mentioned checks contains measures to control the fault/error conditions specified in Table R.1		N/A
U.3.9	Permission for each installation of software in the appliance is given by the person responsible for the appliance		N/A
	User activation of a mode that enables automatic software updates is permitted		N/A
U.3.10	The installation of software does not impair compliance with the requirements of this standard during or after installation		N/A
AA	ANNEX AA (NORMATIVE) REQUIREMENTS TO AVOID BACKSIPHONAGE (IEC 60335-2-79:2021)		
	The requirements of IEC 61770 are applicable except as follows:		—
4	General requirements		—
4.2	Backflow prevention devices incorporated in, or fixed to, the appliance or to the water supply system and constructed so that:		—
	- their functional characteristics cannot be changed, even intentionally		N/V
	- their selection of the necessary safety level is in compliance with Annex BB		N/V
4.3	Not applicable		N/V
4.4	Not applicable		N/V

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
5	General conditions for the tests		—
5.4	Tests, except the functional and endurance tests on airgaps and backflow preventers with reduced pressure zone, are made on the appliance, unless		N/V
	this is impracticable. The compliance is then checked by the tests according to Annex A of IEC 61770:2008.		N/V
7	This clause of IEC 61770 is not applicable		N/V
8	This clause of IEC 61770 is not applicable		N/V
9	This clause of IEC 61770 is not applicable		N/V
10	Backflow preventer with reduced pressure zone		—
10.1	General requirements		—
	The settings of the action and difference pressure of the device fixed and not adjustable.		N/V
	Only the pressure of the water of the supply network can operate the control of the internal components of the device		N/V
	Possible additional control devices (electric, pneumatic) not adversely affect the backflow protection function		N/V
	When installed according to the instructions for use, the drain of the backflow preventer with reduced pressure zone point downwards		N/v
	The design of the relief valve operation such that when the differential pressure over the upstream check valve is less than 14 kPa (140 mbar), the relief valve open to ensure positive safety.		N/V
	Any water retention not possible within the reduced pressure zone		N/V
	The cross-sections of the passage orifices and of the pilot tube for operation of the relief device equal to or greater than 12,5 mm ² , no dimension for the calculation of the cross-section less than 4 mm.		N/V
	An air break to drain exist between any waste drain and any means of collecting the discharged water		N/V
	The backflow preventer with reduced pressure zone, with an air break to drain fitted, evacuate the full relief flow rate without spilling to the outside.		N/V
	This air break to drain directly incorporated into the backflow preventer with reduced pressure zone.		N/V
	The relief orifice of the device permit neither the fitting of a standardized threaded pipe nor the connection of a standardized pipe or shape, be it by glue, welding or interlocking		N/V

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
10.2	Verification of the pressure difference between the upstream and the reduced pressure zones		—
	Test ports have to be provided on the type test sample:		—
	- upstream of the first anti-pollution check valve;		N/V
	- in the reduced pressure zone;		N/V
	- downstream of the second anti-pollution check valve.		N/V
10.3	Verification of the tightness of the downstream check valve (in the closing direction)		—
	No leakage, no permanent deformation or deterioration of the downstream anti-pollution check valve after the test		N/V
10.4	Verification of the tightness of the upstream check valve at low pressure		—
	No sagging of the water level in the tube at any stage of the test		N/V
10.5	Verification of opening start of the relief valve and of its closing		—
	The pressure difference between upstream and reduced pressure zone is greater than 14 kPa		N/V
	After this test, the pressure is increased to its initial value.		N/V
	The device closes in an absolutely tight manner at the end of the test		N/V
10.6	Durability test		—
	The complete device is conditioned for 72 h in an environment at a temperature of $(65 \pm 5) ^\circ\text{C}$, and at a relative humidity of $(50 \pm 5) \%$.		N/V
	No distortion of any part of the device to such an extent that compliance with the standard is impaired		N/V
	Without replacement of any component, the device is capable of fulfilling the requirements of 10.2 to 10.5.		N/V
	Compliance is checked as described		N/V
BB	ANNEX BB (NORMATIVE) ANALYSIS METHOD FOR DETERMINING THE NECESSARY SAFETY DEVICE TO PREVENT BACKSIPHONAGE (IEC 60335-2-79:2021)		
BB.1	Overview		—
	The method for determining the necessary safety device to prevent backsiphonage consists of the following steps.		—
	– Ascertain which fluid categories are used in the appliance in accordance with Clause BB.2.		N/V
	– Ascertain which are the installation characteristics for the safety device to be taken into account in accordance with Clause BB.3.		N/V

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
	– Determine the maximum water level. The result determines if the situation at the point of protection is $p = \text{atm}$ or $p > \text{atm}$.		N/V
	– Consider which are the safety devices to be used, by referring to the protection matrix according to Clause BB.4.		N/V
	– Verify if the drainage systems are fitted with an air break to drain in accordance with Clause BB.5.		N/V
BB.2	Determination of fluid categories which are or might be in contact with potable water		—
BB.2.1	In normal use, fluids which are or may be in contact with potable water are classified in five categories as defined below.		N/V
	In cases where insignificant concentrations or substantial amounts of substances are present, it may be appropriate to redefine the safety measurement.		N/V
	High pressure cleaners and steam cleaners according to IEC 60335-2-79 are classified as fluid category 4		N/V
BB.2.2	Category 1		—
	Water to be used for human consumption coming directly from a potable water distribution system.		N/V
BB.2.3	Category 2		—
	Fluid presenting no human health hazard.		N/V
	Fluid recognised as being fit for human consumption, including water taken from a potable water distribution system, which may have undergone a change in taste, odour, colour or a temperature change (heating or cooling).		N/V
BB.2.4	Category 3		—
	Fluid representing some human health hazard due to the presence of one or more harmful substances.		N/V
BB.2.5	Category 4		—
	Fluid presenting a human health hazard due to the presence of one or more toxic or very toxic substances or one or more radioactive, mutagenic or carcinogenic substances		N/V
BB.2.6	Category 5		—
	Fluid presenting a human health hazard due to the presence of microbiological or viral elements.		N/V

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
BB.3	Determination of installation characteristics – Pressure		—
	For each hydraulic circuit present in the appliance, locate the desired or existing protection point(s) to be protected, or, failing this, the point of connection of the appliance to the potable water main		N/V
	Determine the maximum water level		N/V
	Define whether the protection point or, failing this, the point of connection of the appliance to the potable water mains is subjected to atmospheric pressure ($p = \text{atm}$) or to a pressure exceeding atmospheric pressure ($p > \text{atm}$)		N/V
	– $p = \text{atm}$ applies if the protection point or, failing this point, the point of connection of the appliance to the potable water main is located above the maximum water level;		N/V
	– $p > \text{atm}$ applies if the protection point or, failing this point, the point of connection of the appliance to the potable water main is located below this maximum water level.		N/V
BB.4	Matrix of the safety devices appropriate to fluid categories		—
	The suitability of each safety device is indicated in Table BB.1.		N/V
BB.5	Air break to drain		—
	All appliances connected to a potable water mains and including a water draining device have to be provided with an air-break before their discharge to the drainage system.		N/V
	This air gap complies with the above described requirements. Otherwise, the fluid in the apparatus has to be considered as fluid category 5.		N/V
	The air breaks to drain are realised by a full disconnection or by air inlets.		N/V

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict

10.1	TABLE: Power input deviation				P
Input deviation of/at:	P rated (W)	P measured (W)	ΔP	Required ΔP	Remark
230 V; 50 or 60 Hz	650	337	-313 W; -48,2 %	+32,5 W,+5 %; -65 W;-10 %	P
Supplementary information:					

10.2	TABLE: Current deviation				N/A
Current deviation of/at:	I rated (A)	I measured (A)	ΔI	Required ΔI	Remark
Supplementary information:					

10.101	TABLE: Pressure deviation				P
Pressure deviation of/at:	p rated (MPa)	p measured (MPa)	Δp (%)	Required Δp (%)	Remark
FORTADOR Pro at 230 V, 50 or 60 Hz	1,6	1,6	0	-0,16 MPa, -10%; +0,16 MPa, +10%	P
Supplementary information:					

11.8	TABLE: Heating Test			P
	Test voltage (V).....:	243,8		—
	Ambient (°C).....:	25,0		—
Thermocouple locations		Max. temperature rise measured, ΔT (K)	Max. temperature rise limit, ΔT (K)	
Detergent pump (body) (cl. 155)		34,2	115	
Liquid pump (body) (cl. 155)		34,2	115	
Water refilling pump (body) (cl. 180)		26,5	140	
RFI filter (body) on burner unit		24,0	75	
Ignition transformer (body) (cl. 130)		15,2	85	
Fuel burner (body)		18,3	35	
Flue gases		165,5	375	
Fuel pump solenoid		46,8	See cl. 30	
Refilling pump connector		18,5	For ref.	
Display		16,8	60	
Fuel pump motor metallic surface (cl. 155)		37,9	115	
Fuel pump motor capacitor (surface)		22,1	60	
Burner unit main terminals		11,7	See cl. 30	

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
Fuel pump main body	22,1	For ref.	
Plastic enclosure of burner unit	20,7	For ref.	
PCB transformer (cl. 130)	27,1	85	
Capillary self resetting thermal cut-out (body)	14,7	100	
Detergent pump relay on printed board	19,5	45	
Wet spray pump relay on printed board	17,1	45	
Refilling pump relay on printed board	21,5	45	
Burner unit supply relay on printed board	22,4	45	
Main supply relay on printed board	18,1	45	
Motor fan (cl. 105)	20,1	65	
Core separation of supply cord	17,9	50	
Main RFI filter	19,9	75	
Metal surface over flue gases	94,4	For ref.	
Pressure transducer	38,7	For ref.	
Water mains solenoid valve	10,5	65	
Emergency stop switch	20,1	35	
Plastic handle	8,1	60	
Test corner	1,0	60	
Interlock switch	8,0	55	
Supplementary information: worst condition between 50 or 60 Hz			

11.8	TABLE: Heating test, resistance method					P
	Test voltage (V).....:	243,8				—
	Ambient, t₁ (°C).....:	25				—
	Ambient, t₂ (°C).....:	25				—
Temperature rise of winding	R₁ (Ω)	R₂ (Ω)	ΔT (K)	Max. ΔT (K)	Insulation class	
Primary of ignition transformer	322100	344400	18,0	95	130	
Secondary of ignition transformer	1715	1834	18,0	95	130	
Detergent pump	167,1	189,1	34,2	115	155	
Liquid pump	167,1	189,1	34,2	115	155	
Water refilling pump	39,9	44,0	26,7	140	180	
Start winding of fuel motor pump	98,8	113,2	37,8	115	155	
Run winding of fuel motor pump	50,1	57,4	37,8	115	155	
Primary of PCB transformer	197,5	218,1	27,1	95	130	
Secondary of PCB transformer	2,2	2,4	23,6	95	130	
Supplementary information: worst condition between 50 or 60 Hz						

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict

12	TABLE: Charging of metal-ion batteries						N/A
Battery type	Imbalance	T _{meas} (°C)	T _{cell} (°C)	T _{amb(max)} (°C)	T _{amb(min)} (°C)	T _{amb(test)} (°C)	
Supplementary information:							
T _{meas}	Cell surface temperature measured during the test						
T _{cell}	Cell surface temperature specified by the cell manufacturer						
T _{amb(max)}	Maximum ambient temperature for charging specified by the manufacturer						
T _{amb(min)}	Minimum ambient temperature for charging specified by the manufacturer						
T _{amb(test)}	Ambient temperature of the test room during the test						

13.2	TABLE: Leakage current		P
	Heating appliances: 1,15 x rated input (W)		—
	Motor-operated and combined appliances: 1,06 x rated voltage (V)	243,8	—
Leakage current between:		I (mA)	Max. allowed I (mA)
Line or neutral and metallic enclosure (basic insulation)		0,11	3,5
Line or neutral to non-metallic accessible parts (reinforced insulation)		0,08	0,35 peak
Supplementary information: worst condition between 50 or 60 Hz			

13.3	TABLE: Dielectric Strength		P
Test voltage applied between:		Test potential applied (V)	Breakdown / flashover (Yes/No)
Live parts and earthed metal enclosure (basic insulation)		1228	No
Live parts and plastic enclosure (reinforced insulation)		3000	No
Supplementary information: worst condition between 50 or 60 Hz			

14	TABLE: Transient overvoltages					N/A
Clearance between:	CI (mm)	Required CI (mm)	Rated impulse voltage (V)	Impulse test voltage (V)	Flashover (Yes/No)	
Supplementary information:						

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
16.2	TABLE: Leakage current		P
	Single phase appliances: 1,06 x rated voltage (V)	243,8 V	—
	Three phase appliances: 1,06 x rated voltage divided by $\sqrt{3}$ (V)		—
Leakage current between:		I (mA)	Max. allowed I (mA)
Live parts and earthed metal parts (basic insulation)		6,51 (*)	7 (*)
Live parts and earthed metal parts (basic insulation)		0,1 (**)	3,5 (**)
Live parts and non-metallic accessible parts (reinforced insulation)		0,08	0,5
Supplementary information: (*) tested with RFI filters connected; (**) tested with RFI filters disconnected; no need to double the limit for reinforced insulation even if tested with RFI filters connected. Worst condition between 50 or 60 Hz			

16.3	TABLE: Dielectric Strength		P
Test voltage applied between:		Test potential applied (V)	Breakdown / flashover (Yes/No)
Live parts and earthed metal enclosure		1478	No
Live parts and plastic enclosure (reinforced insulation)		3000	No
Supplementary information: worst condition between 50 or 60 Hz			

17	TABLE: Overload protection		P
	Test voltage (V)		—
	Ambient (°C)		—
Thermocouple locations		Max. temperature rise measured, ΔT (K)	Max. temperature rise limit, ΔT (K)
Ignition transformer		55	175
Supplementary information: Secondary output of printed board transformer protected by a delay fuse (rated current: 0,8 A). No possible overheating. Worst condition between 50 or 60 Hz			

17	TABLE: Overload protection, resistance method					N/A
	Test voltage (V)					—
	Ambient, t_1 (°C)					—
	Ambient, t_2 (°C)					—
Temperature of winding		R_1 (Ω)	R_2 (Ω)	ΔT (K)	T (°C)	Max. T (°C)
Supplementary information:						

IEC 60335-2-79							
Clause	Requirement + Test			Result - Remark			Verdict
19	TABLE: Abnormal operation conditions						P
Operational characteristics			YES/NO	Operational conditions			
Are there electronic circuits to control the appliance operation?			Yes	Normal operation			
Are there “off” or “stand-by” position?			Yes	Stand-by position. No dangerous malfunction if appliance becomes operational.			
The unintended operation of the appliance results in dangerous malfunction?			No				
Sub-clause	Operating conditions description	Test results description	PEC description	EMP 19.11.4	Software type required	19.11.3 PEC	Final result
19.2	Air pre-heater supplied at 0,85 times rated power (0,85 x 110 W = 93,5 W)	Air pre-heater cycles. No dangerous malfunction	N/A	N/A	N/A	N/A	P
19.3	Air pre-heater supplied at 1,24 times rated power (1,24 x 110 W = 136,4 W)	Air pre-heater cycles. No dangerous malfunction	N/A	N/A	N/A	N/A	P
19.4	Thermostat of air pre-heater short circuited	Air pre-heater works until steady conditions are reached. No dangerous malfunction	N/A	N/A	N/A	N/A	P
19.4	Pressure transducer rendered inoperative	Pressure relief device opens at 1,8 MPa. No dangerous malfunction	N/A	N/A	N/A	N/A	P
19.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.7	Vibration pumps dry function for 5 minutes	Temperature doesn't exceed limit	N/A	N/A	N/A	N/A	P

IEC 60335-2-79							
Clause	Requirement + Test			Result - Remark			Verdict
19.7	Locked rotor of fuel motor pump for 5 minutes	Temperature doesn't exceed limit	N/A	N/A	N/A	N/A	P
19.7	Short circuit / open circuit of fuel motor pump capacitor for 5 minutes	Temperature doesn't exceed limit	N/A	N/A	N/A	N/A	P
19.8	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.10	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.11.2	N/V	N/V	N/A	N/A	N/A	N/A	N/V
19.11.4.8	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.10X	N/V	N/V	N/A	N/A	N/A	N/A	N/V
Supplementary information: Motor fans separately approved (not tested). Tests of clause 19.11 were not verified as electric schemes for printed board were not provided, according to the manufacturer. Tests of clauses 19.101, 19.102 and 19.103 were not verified according to the manufacturer. A fault of refilling system was also performed to verify compliance with cl. 20.102 (output signal from microcontroller activating refilling pump always OFF; this is the only test of cl. 19.11.2 performed). Water boiler was emptied. Self resetting thermal cut-out opens disconnecting burner unit supply circuit. Maximum temperature registered on boiler was 237,8 °C. Considered factory setting regulation for self resetting thermal cut-out.							

19.7	TABLE: Abnormal operation, locked rotor/moving parts						P
	Test voltage (V).....:			230 V			—
	Ambient, t₁ (°C).....:			23,3			—
	Ambient, t₂ (°C).....:			23,3			—
Temperature rise of winding			R₁ (Ω)	R₂ (Ω)	ΔT (K)	T (°C)	Max. T (°C)
Water refilling pump (*) cl. 180			39,9	47,4	48,4	71,8	260
Detergent pump (*) cl. 155			167,1	212,6	70,2	93,5	240
Liquid pump (*) cl. 155			167,1	212,6	70,2	93,5	240
Start winding of fuel motor pump cl. 130 (**)			98,8	160,0	159,7	189,0	225
Run winding of fuel motor pump cl. 130 (**)			50,1	84,2	175,5	198,8	225
Supplementary information: (*) dry function for 5 minutes; (**) worst case between locked rotor, capacitor short circuited and capacitor open circuited for 5 minutes. Worst condition between 50 or 60 Hz							

IEC 60335-2-79						
Clause	Requirement + Test			Result - Remark		Verdict
19.9	TABLE: Abnormal operation, running overload					N/A
	Test voltage (V)..... :					—
	Ambient, t ₁ (°C)..... :					—
	Ambient, t ₂ (°C)..... :					—
Temperature rise of winding		R ₁ (Ω)	R ₂ (Ω)	ΔT (K)	T (°C)	Max. T (°C)
Supplementary information:						

19.13	TABLE: Abnormal operation, temperature rises			P
Thermocouple locations		Max. temperature rise measured, ΔT (K)	Max. temperature rise limit, ΔT (K)	
Power supply cord		17,9	150	
Test corner		1	150	
Supplementary information: worst case assumed				

21.1	TABLE: Impact resistance			P
Impacts per surface		Surface tested	Impact energy (Nm)	Comments
Three blows		Enclosure external	1,0	No deformation
Three blows		User area	1,0	No deformation
Supplementary information:				

24.1	TABLE: Critical components information					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾	
Power cord	Plastrol	H05VV-F	3G1,5 mm ² , 300 V	60227 IEC 53	KEMA KEUR	
Plug	Plastrol	CEE7/7(E/F)	16A, 250V, 50Hz IP44,	IEC 60884-1	KEMA KEUR	
Circuit breaker	LCTEC	EBS9RN2P	230 V, 50/60 Hz, 25 A, -30 / +50 °C, 8000 cycles	IEC/EN 60947-1	TUV Rheinland	
Emergency switch	AUSPICIOUS	LEB22-1-C	240 V, 3 A, -20/+60 °C, 1E6 cycles	IEC/EN 61058-1	TUV, CSA, CE	
Interlock switch	HIGHLY	ED-1-1-21	240 V 3A 80 °C 150000 cycles	IEC/EN 60947-1	TUV Rh	
Burner with:	LAMBORGHINI CAROLECLIMA	ECO 3R LMO	230 V, 240 W, 50/60 Hz	IEC/EN 60335-1 IEC/EN 60335-2- 79	Checked in the appliance	
Air pre-heater	DANFOSS	FPHE 5 030N5050	230 V, 50/60 Hz 30/110 W	IEC/EN 60335-1 IEC/EN 60335-2- 79	Checked in the appliance	

IEC 60335-2-79					
Clause	Requirement + Test		Result - Remark		Verdict
RFI filter	D.E.M.	FC72122F	0,1 uF (X2) + 2,2 MΩ 2x27 nF (Y2)	IEC/EN 60384-14	IMQ
Ignition transformer	F.I.D.A.	MOD.26/40 33% ITD	PRI: 230/240 V 0,20 A SEC: 26 kV peak (8 kV eff.) 40 mA E.D. 33% in 3'	IEC/EN 60335-1 IEC/EN 60335-2-79	Checked in the appliance
Ignition board unit with:	SIEMENS	LMO14.111C2	230 V 50/60 Hz	IEC/EN 60335-1 IEC/EN 60335-2-79	Checked in the appliance
Printed board (manufacturer code: 0483 3c100)	VASTBRIGHT TECHNOLOGY CO. LTD	VT-8	130 °C; V-0	UL 94	UL
RFI capacitor	TDK	MKT/SH	0,47 uF 305 V~ X2 40/105/56/B	IEC/EN 60384-14	ENEC 10
Relay K24, K34	Panasonic	ALA2PF24 E02	Coil: 24 V DC Contact: 250 V~ 5A	IEC/EN 61810-1	VDE
Relay K14	Panasonic	JS1F-B-24V-FT-H193 AJS12121FT E01	Coil: 24 V DC Contact: 250 V 10 A resistive	IEC/EN 61810-1	VDE
Pressure relief device	CASTEL PESSANO-MI	3060/45C180 18,0 bar	Pressure setting: 18,0 bar	IEC/EN 60335-1 IEC/EN 60335-2-79	Checked in the appliance
Main RFI filter	EPCOS	SIFI B84112G 0000B060	250 V, 10 A, 50/60 Hz, T amb = 40 °C, 25/100/21	IEC/EN 60939-1	ENEC 10
Oil pump with:	DANFOSS	BFP21R3071 N0167	-	IEC/EN 60335-1 IEC/EN 60335-2-79	Checked in the appliance
Solenoid valve	DANFOSS	071N0808	220/230 V 50/60 Hz 0,06 A IP40 T85	IEC/EN 60730-1 IEC/EN 60730-2-8	SEMKO
Motor	SIMEL	ZD 87/2072-32	240 V, 50/60 Hz, 0,8/1,1 A, 100 W Class 155	IEC/EN 60335-1 IEC/EN 60335-2-79	Checked in the appliance
Motor run capacitor	DUCATI ENERGIA	416.17.41...	6,3 uF ± 10 % 475 V~ Class B -25/85/21	IEC/EN 60252-1	VDE, IMQ
Self resetting thermal cut-out	FOSHAN BEST ELECTRICAL	WKB-300 WKB-6	250 V, 16A, 50÷300 °C, 100000 cycles	IEC 60730-1 IEC 60730-2-9	TUV, CQC
Motor fan (2x)	SUNON	EE50101S2-1000U-99	0,6 A, 12 V DC	IEC/EN 60335-1 IEC/EN 60335-2-79	TUV Rh
Water mains solenoid valve	ELBI	TYPE 329 T max fluid: 60 °C 0,2-10 bar (code C-423/21-A15 33290155)	Coil: 220 – 240 V 50 / 60 Hz 100% ED T max 90 °C	IEC/EN 60730-1 IEC/EN 60730-2-8	IMQ

IEC 60335-2-79					
Clause	Requirement + Test		Result - Remark		Verdict
Water refilling pump	CEME	ET3000	110 W, 0,5 A, 230 V, 50/60 Hz, Cl.155	IEC/EN 60335-1	VDE
Liquid pump With:	ULKA	EP5	230 V 50 Hz 48 W 2/1 min Cl. 155	IEC/EN 60335-1	VDE
Self resetting thermal cut out	BOCHEN	BH-B2D	250V, 5A, 80°C, 10000 cycles	IEC/EN 60730-1 IEC/EN 60730-2-9	TUV, CQC
Detergent pump With:	ULKA	EP5	230 V 50 Hz 48 W 2/1 min Cl. 155	IEC/EN 60335-1	VDE
Self resetting thermal cut out	BOCHEN	BH-B2D	250 V, 5 A, 80 °C, 10000 cycles	IEC/EN 60730-1 IEC/EN 60730-2-9	TUV, CQC
Pressure transducer	WIKA	O-10(5)	0-16 bar 4-20 mA 8-30 V	IEC/EN 60335-1 IEC/EN 60335-2-79	Checked in the appliance
Printed board with:	ELEKTROINVEST	STMPV2	UL 94 V-0	IEC/EN 60335-1 IEC/EN 60335-2-79	Checked in the appliance
Gas discharge tube (interposed between GND and varistor versus line and varistor versus neutral)	Interchangeable	Interchangeable	3600 V DC	IEC/EN 60335-1 IEC/EN 60335-2-79 UL 497B	Checked in the appliance UL or equivalent
Transformer	HAHN	BVUI3840087	Input: 2x115 V, Output: 2x12 V 0,75 A, 18 W Insulation class	IEC/EN 61558-1 IEC/EN 61558-2-16	ENEC 05
Relay (x8)	HONGFA	HF3FF1012-1ZST	Coil: 12 V Contact: 250 V, 10 A	IEC/EN 61810-1	VDE
X2 capacitor (x8)	VISHAY	MKP	310 V~, 0,1 uF, X2 55/110/56/B	IEC/EN 60384-14	VDE
Fuse (B1)	SIBA	5 x 20 mm	T 250 V, 0,8 A	IEC/EN 60127-1 IEC/EN 60127-2-1	VDE
Fuse (B2)	SIBA	5 x 20 mm	T 250 V, 0,8 A	IEC/EN 60127-1 IEC/EN 60127-2-1	VDE
Fuse (B3) before varistor between line and neutral	SIBA	5 x 20 mm	T 250 V, 10 A	IEC/EN 60127-1 IEC/EN 60127-2-1	VDE
Display board	DWIN TECHNOLOGIES	K600+ DMT80480T070	5-15 V, 0,3 A	IEC 60335-1 IEC 60335-2-79	Checked in the appliance
Supplementary information: 1) Provided evidence ensures the agreed level of compliance. See OD-2039 License available upon request					

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict

28.1	TABLE: Threaded part torque test			P
Threaded part identification		Diameter of thread (mm)	Column number (I, II, or III)	Applied torque (Nm)
Earthing, enclosure		4,0	II	1,2
Supplementary information:				

29	TABLE: Clearance and creepage distance measurements					P
Clearance cl and creepage distance dcr at/of:	Up (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required dcr (mm)	dcr (mm)
Basic insulation (across printed board tracks)	325,2	230	1,5	2,7	2,5	2,7
Basic insulation (slot liner of oil pump motor)	622,2	440	1,5	2,0	1,5	2,0
Reinforced insulation (across printed board tracks)	325,2	230	2,0	6,0	5,0	6,0
Functional insulation	325,2	230	1,5	1,5	2,5	2,5
Supplementary information: Clearances and creepage distances of functional insulation short circuited as required in cl. 19.11.2 not considered according to the manufacturer as electric schemes were not provided. For lacquered conductors in windings, considered that creepage distances for basic insulation need not be greater than the associated clearance specified in Table 16 (see NOTE 1 of table 17).						

30.1	TABLE: Ball pressure test of thermoplastics			P
Allowed impression diameter (mm).....:			2,0	—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Circuit breaker	See cl. 24.1	125	0,5	
Emergency switch	See cl. 24.1	125	1,1	
Interlock switch	See cl. 24.1	125	1,0	
Air pre-heater (plastic supporting connection)	See cl. 24.1	125	1,0	
Burner unit RFI filter	See cl. 24.1	125	1,0	
Ignition transformer	See cl. 24.1	125	0,8	
Ignition board unit (plastic supporting connection)	See cl. 24.1	125	1,1	
RFI capacitor on ignition board unit PCB	See cl. 24.1	125	1,2	
Relay K24, K34 on ignition board unit PCB	See cl. 24.1	125	0,9	
Relay K14 on ignition board unit PCB	See cl. 24.1	125	0,9	
Oil pump solenoid valve	See cl. 24.1	125	0,8	
Motor run capacitor	See cl. 24.1	125	1,2	
Water mains solenoid valve	See cl. 24.1	125	1,0	
Water refilling pump	See cl. 24.1	125	0,6	

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict
Main RFI filter (plastic supporting connection)	See cl. 24.1	125	1,3
Liquid / detergent pump	See cl. 24.1	125	1,0
PCB transformer	See cl. 24.1	125	0,4
PCB relay	See cl. 24.1	125	1,2
PCB capacitor X2	See cl. 24.1	125	1,3
Fuse holder	n.d.	125	0,5
Male / female burning unit connector (brown)	n.d.	125	1,0
Male / female ignition board connector (black)	n.d.	125	1,0
Male / female oil pump connector	n.d.	125	0,8
External plastic screen	See cl. 24.1	75	0,6
PCB connectors (supporting live parts) (*)	n.d.	125	1,0
Supplementary information: (*) worst case			

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict

30.2	TABLE: Resistance to heat and fire - Glow wire tests							P
Object/ Part No./ Material	Manufacturer/ trademark	Glow wire test (GWT); (°C)						Verdict
		550	650		750		850 *	
			te (s)	ti (s)	te (s)	ti (s)		
Circuit breaker	See cl. 24.1				32,6	4,0		P
Emergency switch	See cl. 24.1				34,9	2,1		P
Interlock switch	See cl. 24.1				n.i.	n.i.		P
Air pre-heater (plastic supporting connection)	See cl. 24.1		n.i.	n.i.				P
Burner unit RFI filter	See cl. 24.1		n.i.	n.i.				P
Ignition transformer	See cl. 24.1		n.i.	n.i.				P
Ignition transformer connector	n.d.		n.i.	n.i.				P
Ignition board unit (plastic supporting connection)	See cl. 24.1				n.i.	n.i.		P
RFI capacitor on ignition board unit PCB	See cl. 24.1		n.i.	n.i.				P
Relay K24, K34 on ignition board unit PCB	See cl. 24.1				n.i.	n.i.		P
Relay K14 on ignition board unit PCB	See cl. 24.1				n.i.	n.i.		P
Oil pump solenoid valve	See cl. 24.1		n.i.	n.i.				P
Oil pump solenoid valve connector	n.d.		n.i.	n.i.				P
Motor run capacitor	See cl. 24.1				n.i.	n.i.		P
Water mains solenoid valve	See cl. 24.1		n.i.	n.i.				P
Water refilling pump	See cl. 24.1				n.i.	n.i.		P
Main RFI filter (plastic supporting connection)	See cl. 24.1		n.i.	n.i.				P
Liquid / detergent pump	See cl. 24.1				n.i.	n.i.		P
PCB transformer	See cl. 24.1				n.i.	n.i.		P
PCB relay	See cl. 24.1				n.i.	n.i.		P
PCB capacitor X2	See cl. 24.1		n.i.	n.i.				P
Fuse holder	n.d.				n.i.	n.i.		P
Male / female burning unit connector (brown)	n.d.				6,4	0,8		P
External plastic screen	See cl. 24.1	P						P
PCB connectors (worst case)	n.d.				n.i.	n.i.		P

IEC 60335-2-79			
Clause	Requirement + Test	Result - Remark	Verdict

Object/ Part No./ Material	Manufacturer/ trademark	Glow-wire flammability index (GWFI), °C				GW ignition temp. (GWIT), °C		Verdict
		550	650	750	850 *	675	775	
The test specimen passed the glow wire test (GWT) with no ignition [(te – ti) ≤ 2s] (Yes/No) :								YES
If no, then surrounding parts passed the needle-flame test of annex E (Yes/No)..... :								NO
The test specimen passed the test by virtue of most of the flaming material being withdrawn with the glow-wire (Yes/No)?..... :								YES
Ignition of the specified layer placed underneath the test specimen (Yes/No)..... :								NO
Supplementary information:								
* Tests acc. to cl 30.2.3 are not applicable (IEC 60335-2-79:2021)								
550 °C GWT not relevant (or applicable) to parts of material classified at least HB40 or if relevant HBF								
The GWIT pre-selection option, the 850 °C GWFI pre-selection option, and the 850 °C GWT are not relevant (or applicable) for attended appliances.								

30.2/30.2.4	TABLE: Needle-flame test (NFT)					N/A
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict	
Supplementary information: NFT not relevant (or applicable) for Parts of material classified as V-0 or V-1 NFT not relevant (or applicable) for Base material of PCBs classified as V-0 or if relevant VTM-0						

List of test equipment used:

A completed list of used test equipment shall be provided in the Test Reports when a Customer's Testing Facility according to CTF stage 1 or CTF stage 2 procedure has been used.

Note: This page may be removed when CTF stage 1 or CTF stage 2 are not used. See also clause 4.8 in OD 2020 for more details.

Clause	Measurement / testing	Testing / measuring equipment / material used, (Equipment ID)	Range used	Last Calibration date	Calibration due date
		List of used instruments is kept on file folder and available for review.			

Statement of Measurement Uncertainty

The Test Report shall include a statement concerning the uncertainty of the measurement systems used for the tests conducted when it is required by the standard, client or other authorities.

In such cases, the table below is to be used for reporting U of M.

This page may be removed from the final Test Report when not required. See also clause 4.8 in OD 2020 for more details.

Clause #	Parameter/ Measurement / test method	Requirement % or k	Calculated U of M*

*Note: Calculations leading to the reported value are on file with the NCB

ATTACHMENT TO TEST REPORT IEC 60335-2-79 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES Safety of household and similar electrical appliances – Part 2-79: Particular requirements for high pressure cleaners and steam cleaners, for industrial and commercial use	
Differences according to:	EN 60335-1:2012 EN 60335-2-79:2012 EN 50366:2003 + A1:2006 or EN 62233:2008
Attachment Form No.:	EU_GD_IEC60335_2_79E
Attachment Originator:	SLG Pruef- und Zertifizierungs GmbH
Master Attachment:	2012-11
Copyright © 2012 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.	

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	CENELEC COMMON MODIFICATIONS		
6.1	Delete “class 0” and “class 01”	noted	P
7.1	Single-phase appliances to be connected to the supply mains: 230 V covered		P
	Multi-phase appliances to be connected to the supply mains: 400 V covered		N/A
7.10	Devices used to start/stop operational functions of the appliance distinguished from other manual devices by means of shape, size, surface texture, position, etc.		P
	An indication that the device has been operated is given by:		—
	• a tactile feedback, or		N/A
	• an audible and visual feedback		P
7.12	The instructions include the substance of the following:		—
	Machines shall not be used by children. Children should be supervised to ensure that they do not play with the machine (EN 60335-2-79:2012)	Substance given	P
	The instructions for machines intended for commercial use include the substance of the following: (EN 60335-2-79:2012)		—
	This machine is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge (EN 60335-2-79:2012)		P
	The instructions for machines not intended for commercial use include the substance of the following: (EN 60335-2-79:2012)		—
	This machine can be used by people with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the machine in a safe way and understand the hazards involved. (EN 60335-2-79:2012)		P
	- children shall not play with the appliance		P
	- cleaning and user maintenance shall not be made by children without supervision		P
7.12.Z1	The specific instructions related to the safe operation of this appliance is collated together in the front section of the user instructions		P
	The height of the characters, measured on the capital letters, is at least 3 mm		P
	These instructions are also available in an alternative format, e.g. on a website		P

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
7.12.102	The instructions provide information on airborne noise emission as indicated in CC.2.7 (EN 60335-2-79:2012)		P
7.12.103	The instructions provide information on vibration emission as indicated in DD.2 (EN 60335-2-79:2012)		P
8.1.1	Test probe B of EN 61032 is applied with a force not exceeding 1 N (EN 60335-2-79:2012)		P
	the appliance being in every possible position except that appliances normally used on the floor and having a mass exceeding 40 kg are not tilted (EN 60335-2-79:2012)		P
	Through openings, the test probe is applied to any depth that the probe will permit and is rotated or angled before, during and after insertion to any position (EN 60335-2-79:2012)	No entry of test probe	N/A
	If the opening does not allow the entry of the probe, the force on the probe in the straight position is increased to 20 N (EN 60335-2-79:2012)		P
	If the probe then enters the opening, the test is repeated with the probe in the angled position.		N/A
8.2	Compliance is checked by applying the test probe B of EN 61032 (EN 60335-2-79:2012)		P
	For built-in appliances and fixed appliances, the test probe B of EN 61032 is applied only after installation (EN 60335-2-79:2012)		N/A
11.8	Footnotes to "External enclosure of motor-operated appliances" to be taken into account		P
15.1.2	Appliances with an automatic cord reel tested with the cord in the most unfavourable position so that the reeling of the wet cord may affect electrical insulation during operation, the cord not being dried before reeling		N/A
20.2	Compliance is checked by inspection, by the test of 21.1 and by applying a force not exceeding 5 N by means of a test probe that is similar to test probe B of EN 61032 but having a circular stop face with a diameter of 50 mm, instead of the non-circular face." (EN 60335-2-79:2012)		P
	Test probe 18 applied with a force of 2,5N on the appliance fully assembled		P
24.1	Components comply with the safety requirements specified in the relevant standards as far as they reasonably apply		P

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	The requirements of Clause 29 of this standard apply between live parts of components and accessible parts of the appliance.		P
	The requirements of 30.2 of this standard apply to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections inside components		P
	Components that have not been previously tested or do not comply with the standard for the relevant component are tested according to the requirements of 30.2		P
	Components that have been previously tested and shown to comply with the resistance to fire requirements in the standard for the relevant component need not be retested provided that:		—
	- the severity specified in the component standard is not less than the severity specified in 30.2, and		P
	- the test report for the component states whether it complied with the standard for the relevant component with or without flame, flames not exceeding 2 s during the test are ignored		P
	Unless components have been previously tested and found to comply with the relevant standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		P
	For components mentioned in 24.1.1 to 24.1.9, no additional tests specified in the relevant standard for the component are necessary other than those specified in 24.1.1 to 24.1.9		P
	Components that have not been separately tested and found to comply with the relevant standard, and		P
	components that are not marked or not used in accordance with their marking,		P
	are tested in accordance with the conditions occurring in the appliance, the number of samples being that required by the relevant standard		P
	Lamp holders and starter holders that have not been previously tested and found to comply with the relevant standard are tested as a part of the appliance and additionally comply with the gauging and interchangeability requirements of the relevant standard under the conditions occurring in the appliance		N/A
	Where the relevant standard specifies these gauging and interchangeability requirements at elevated temperatures, the temperatures measured during the tests of Clause 11 are used		N/A

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	Plugs and socket-outlets and other connecting devices of interconnection cords are not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1, or		N/A
	with connectors and appliance inlets complying with the standard sheets of IEC 60320-1,		N/A
	if direct supply to these parts from the supply mains gives rise to a hazard		N/A
24.1.7	If the remote operation of the appliance is via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is EN 41003		N/A
	Compliance with Clause 8 of this standard is not impaired by connecting the appliance to a device covered by EN 41003		N/A
24.21	For motor running capacitors (IEC 60252-1 type P2) with a metallic enclosure having an overpressure fuse the flame testing of internal plastic parts supporting current carrying connections as required in 30.2.2 and 30.2.3.1 is not necessary	Capacitor with non-metallic enclosure	N/A
25.6	Supply cords of single-phase portable appliances having a rated current not exceeding 16 A, fitted with a plug complying with the following standard sheets of IEC/TR 60083:		—
	- for Class I appliances: standard sheet C2b, C3b or C4	C4 type	P
	- for Class II appliances: standard sheet C5 or C6		N/A
25.7	Rubber sheathed cords (60245 IEC 53) are not suitable for appliances intended to be used outdoors or when they are liable to be exposed to significant amount of ultraviolet radiation	Noted	P
	Halogen-free thermoplastic compound sheathed supply cords have properties at least those of:		—
	halogen-free thermoplastic compound sheathed cords (H03Z1Z1H2-F or H03Z1Z1-F), for appliances having a mass not exceeding 3 kg		N/A
	halogen-free thermoplastic compound sheathed cords (H05Z1Z1H2-F or H05Z1Z1-F), for other appliances		N/A
	Cross-linked halogen-free compound sheathed supply cords have properties at least those of cross-linked halogen-free compound sheathed cords (H07ZZ-F)		N/A

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
26.11	Conductors connected by soldering are not considered to be positioned or fixed so that reliance is not placed upon the soldering alone to maintain them in position unless they are held in place near the terminals independently of the solder	Conductors not connected by soldering	N/A
29.3.Z1	Appliance constructed so that if there is a possibility of damaging the insulation during installation, the insulation withstands the scratch and penetration test of 21.2		N/A
32	Compliance regarding electromagnetic fields is checked according to EN 50366 or EN 62233		P
Annex I, 19.1.101	The appliance is supplied at rated voltage and operated under normal operation with each of the fault conditions specified		N/A
	The duration of the test is as specified in 19.7		N/A

CC	Annex CC (NORMATIVE) Emission of acoustical noise (IEC 60335-2-79:2012:02)		—
CC.2	Noise test code		—
CC.2.1	Emission sound pressure level determination		P
	The emission sound pressure level is determined in accordance with ISO 11203, applying the method described in 6.2.3 d) with the measurement distance $d = 1 \text{ m}$		P
CC.2.2	Sound power level determination		—
	The sound power level is measured in accordance with ISO 3744, or with ISO 3743-1 if a suitable hard-walled test room is available		P
CC.2.3	Operating and mounting conditions		—
	The operating conditions are identical for the determination for both sound power and emission sound pressure level at the specified positions		P
	In addition to normal operation in accordance with 3.1.9, the following requirements taken into account		P
	The high pressure cleaner is installed on the reflecting plane; skid-mounted machines placed on a support 0,40 m high, unless otherwise required by the manufacturer's conditions of installation		P
	The high pressure cleaner is operated under normal operation. Immediate before each series of measurement, the machine is operated for at least 10 min		P

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	The noise emitted by the nozzle and the emission of the water jet hitting any surfaces is excluded from measurement		P
	The period of observation is at least 15 s		P
CC.2.4	Measurement uncertainties		—
	A standard deviation of reproducibility σ_{RO} of less than 1,5 dB is expected for both the A weighted emission sound pressure level according to ISO 11203 and the A-weighted sound power level determined according to ISO 3744 or ISO 3743-1		P
CC.2.5	Information to be recorded		—
	The information to be recorded covers all of the technical requirements of this noise test code		P
	Any deviations from this noise test code or from the basic standards upon which it is based are to be recorded together with the technical justification for such deviations		P
CC.2.6	Information to be reported		—
	The information to be included in the test report is at least that which the manufacturer requires for a noise emission declaration or the user requires to verify the declared values		P
CC.2.7	Declaration and verification of noise emission values		—
	The declaration of the emission sound pressure level is made as a dual-number noise emission declaration according to ISO 4871, where it exceeds 70 dB(A)		P
	Where the emission sound pressure level does not exceed 70 dB(A), this fact may be stated in place of the emission value and uncertainty, e.g. by declaring $L_{pA} \leq 70$ dB(A)		N/A
	It declares the noise emission value L_{pA} and separately the respective uncertainty K_{pA}		P
	The sound power level given as a single value declaration according to ISO 4871 declaring the sum of LWA and the respective uncertainty KWA, where the emission sound pressure level exceeds 80 dB(A).		P
	The noise declaration states that the noise emission values have been obtained according to this noise test code		P
	If this statement is not applicable, the noise declaration indicates clearly what the deviations from this standard, and from the basic standards, are		N/A

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict

	If undertaken, verification is conducted according to ISO 4871 by using the same mounting, installation and operating conditions as those used for the initial determination of the noise emission values		N/A
--	---	--	-----

DD	Annex DD (NORMATIVE) Emission of vibration (IEC 60335-2-79:2012:02)		—
DD.4	Information on vibration emission		—
	The instructions give the following information:		—
	– the vibration total value to which the hand-arm system is subjected, measured in accordance with this document, if the vibration total value exceeds 2,5 m/s		N/A
	– Where this value does not exceed 2,5 m/s ² , this fact may be stated in place of the emission value and uncertainty, e.g. by declaring $a_h \leq 2,5 \text{ m/s}^2$;		P
	– the uncertainty surrounding this value in accordance with this document		N/A
	These values are either those actually measured for the machine in question or those established on the basis of measurements taken for a technically comparable machine which is representative of the machine being produced		N/A
	Regarding operating conditions during measurement and the methods used for measurement, the reference of the standard applied (IEC 60335-2-79) is specified		N/A
DD.6	Instrumentation requirements as given in clause DD.6.1 to DD.6.5		N/A
DD.7	Testing and operating conditions of the machinery		—
DD.7.1	General		—
	Measurements carried out on technically impeccable and properly serviced machines		N/A
	During testing, the machine equipped and held in a manner similar to that when performing a normal work task. A reasonable warming-up period is undertaken prior to the start of the test		N/A
DD.7.2	Operating conditions		—
	During testing, the machine is operated at rated voltage, and used in accordance with normal operation as defined in this standard and with the manufacturer's specifications, as far as not otherwise specified in this clause		N/A
	The operation is stable and smooth		N/A

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	In particular, the following conditions apply:		—
	– tests carried out at normal operation		N/A
	– spraying device held without tension, with a downwards angle of $45^{\circ} \pm 5^{\circ}$, spraying the water jet to the atmosphere without working towards any barrier (see Figure DD.5). Gloves not used unless required as PPE due to manufacturer's instructions.		N/A
	– pulsation dampener not used, as far as possible. If a pulsation dampener is unchangeably fixed to the machine, this fact has to be reported		N/A
	– length of the hose line not more than 10 m. If the standard length according to the manufacturer's instructions is more than 10 m, the standard hose may be used; in this case the length has to be reported. The type of the hose line is to be reported		N/A
	– nominal diameter not more than DN 12. If the standard nominal diameter according to the manufacturer's instructions is more than DN 12, the standard hose may be used; in this case the nominal diameter has to be reported		N/A
	– during measurement, the hose lies without interference and in particular without touching the operator		N/A
DD.7.3	Operators		—
	Three different operators operate the machine during testing		N/A
	The vibration of the machine is influenced by the operators, operators therefore skilled enough to be able to hold and operate the machine correctly		N/A
DD.8	Measurement procedure and validity		—
DD.8.1	Reported vibration values		—
	Three series of five consecutive tests carried out on each machine tested, using a different operator for each series		N/A
	Values reported as in Annex EE		N/A
	Test carried out for the machine as described in Clause DD.7 and reported for a standard nozzle		N/A
	If it is necessary to report alternative vibration values, the tests carried out as described in DD.8.2		N/A
	For nozzles which cause significantly higher vibration values, these values reported also. If only one value is to be reported, this is the higher one		N/A

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
DD.8.2	Declaration and verification of the vibration emission value		—
	The ahv value for each operator calculated as the arithmetic mean of ahv values for the five test runs		N/A
	For each hand position, the result from the three operators combined into one value, ah , using the arithmetic mean of the three ahv values		N/A
	For tests using only one machine, the declared value, ahd , is the highest of the ah values reported for the two hand positions		N/A
	For tests using three or more machines, ah values for each hand position calculated as the arithmetic mean of the ah values for the different machines on that hand position		N/A
	The declared value, ahd , is the highest of the ah values reported for the two hand positions		N/A
DD.9	Measurement report		—
	The following information given in the test report:		—
	– reference to this document;		N/A
	– name of the measuring laboratory;		N/A
	– date of measurement and name of the person responsible for the test;		N/A
	– specification of the hand-held machine (manufacturer, type, serial number, etc.);		N/A
	– declared emission value ahd and uncertainty K;		N/A
	– type of nozzle, trigger gun, hose;		N/A
	– energy supply (input voltage etc., as applicable);		N/A
	– instrumentation (accelerometer, recording system, hardware, software, etc.);		N/A
	– position and fastening of transducers, measuring directions and individual vibration values;		N/A
	– operating conditions, and other quantities to be specified according to Clause DD.7;		N/A
	– detailed results of the test (see Annex EE)		N/A
	If transducer positions or measurements other than those specified in this document are used, they are clearly defined and an explanation of the reason for the change in the position of the transducer inserted in the test report		N/A
DD.10	Determination of uncertainty as given in clauses DD.10.1 to DD.10.3		N/A

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict

ZA	ANNEX ZA (NORMATIVE) SPECIAL NATIONAL CONDITIONS		—
	Norway		—
19.5	The test is also applicable to appliances intended to be permanently connected to fixed wiring		N/A
	Norway		—
22.2	The second paragraph of this subclause, dealing with single-phase, permanently connected class I appliances having heating elements, is not applicable due to the supply system		N/A
	All CENELEC countries		—
25.6 and 25.25	Information concerning National plug and socket-outlets is available from the CENELEC website. Normative national requirements concerning plug and socket-outlets are shown in the relevant National standard		P
	Ireland and United Kingdom		—
25.8	In the table, the lines for 10 A and 16 A are replaced by:		—
	> 10 and ≤ 13 1,25		N/A
	> 13 and ≤ 16 1,5		N/A

ZB	ANNEX ZB (INFORMATIVE) A-DEVIATIONS		—
	Ireland		N/A
25.6	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs complying with I.S. 401:1997, or equivalent, to be fitted to domestic appliances		N/A
	United Kingdom		—
25.6	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs to BS 1363 to be fitted to domestic appliances. It also allows plugs to BS 4573 and EN 50075 to be fitted to shavers and toothbrushes		N/A

ZC	ANNEX ZC (NORMATIVE) NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS		—
	A list of referenced documents in this standard		P

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict

ZD	ANNEX ZD (INFORMATIVE) IEC and CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS		—
	A table with IEC and CENELEC code designations for flexible cords		P

ZE	ANNEX ZE (INFORMATIVE) SPECIFIC ADDITIONAL REQUIREMENTS FOR APPLIANCES AND MACHINES INTENDED FOR COMMERCIAL USE		—
7.1	Business name and full address of the manufacturer and, where applicable, his authorized representative.....:	Fortador K.A. Traczyńscy Sp. Komandytowo-Akcyjna Ul.Aleja Krakowska 108 05-090 Sękocin Stary, Poland	P
	Model or type reference.....:	Pro	P
	Serial number, if any.....:	B010280	P
	Production year	2022	P
	Designation of the appliance	See note 101	P
7.12	Instructions provided with the appliance so that the appliance can be used safely		P
	The instructions contain at least the following information:		—
	- the business name and full address of the manufacturer and, where applicable, his authorized representative		P
	- model or type reference of the appliance as marked on the appliance itself, except for the serial number		P
	- the designation of the appliance together with its explanation in case it is given by a combination of letters and/or numbers		P
	- the general description of the appliance, when needed due to the complexity of the appliance		P
	- specific precautions if required during installation, operation, adjusting, user maintenance, cleaning, repairing or moving		P
	- when needed drawings, diagrams, descriptions and explanations necessary for the safe use and user maintenance of the appliance		P
	- the possible reasonably foreseeable misuse and, whenever relevant, a warning against the effects it may have on the safe use of the appliance		P
	The words "Original instructions" appear on the language version(s) verified by the manufacturer or by the authorized representative		P

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	When a translation of the original instructions has been provided by a person introducing the appliance on the market; the meaning of the sentence "Translation of the original instructions" appear in the relevant instructions delivered with the appliance		P
	The instructions for maintenance/service to be done by specialized personnel, mandated by the manufacturer or the authorized representative may be supplied in only one Community language which the specialized personnel understand		P
	The instructions indicate the type and frequency of inspections and maintenance required for safe operation including the preventive maintenance measures		P
7.12.ZE1	If needed for specific appliances, the following information to be given:		—
	on use, transportation, assembly, dismantling when out of service, testing or foreseeable breakdowns, if these operations have consequences on stability of the appliance in order to avoid overturning, falling or uncontrolled movements of the appliance or of its component parts		P
	on how to maintain adequate mechanical stability when in use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance		P
	on the protective measures to be taken by the user, including, where appropriate, the personal protective equipment to be provided		P
	on the operating method to be followed in the event of accident or breakdown; if a blockage is likely to occur the operating method to safely unblock the appliance		P
	on the specifications on the spare parts to be used, when these affect the health and safety of the operator		P
	on airborne noise emissions, determined and declared in accordance with the relevant Part 2, which includes:		—
	- the A-weighted emission sound pressure level at workstations, where this exceeds 70 dB(A)	77 dB(A)	P
	- where this level does not exceed 70 dB(A), this fact is indicated		N/A

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	- the peak C-weighted instantaneous sound pressure value at workstations, where this exceeds 63 Pa (130 dB in relation to 20 µPa)		N/A
	- the A-weighted sound power level emitted by the machinery, where the A-weighted emission sound pressure level at workstations exceeds 80 dB(A).....		N/A
7.12.ZE2	The instructions includes a warning to disconnect the appliance from its power source during service and when replacing parts		P
	If the removal of the plug is foreseen, it is clearly indicated that the removal of the plug has to be such that an operator can check from any of the points to which he has access that the plug remains removed		P
	If this is not possible, due to the construction of the appliance or its installation, a disconnection with a locking system in the isolated position is provided		N/A
19.11.4.8	The appliance continues to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage fluctuation occurred, or		N/A
	a manual operation is required to restart it		N/A
20.1	Appliances and their components and fittings have adequate mechanical stability during transportation, assembly, dismantling and any other action involving the appliance		P
20.2	Dangerous moving transmission parts safeguarded either by design or guards	No moving parts	N/A
	When guards are used, they are fixed guards, interlocking movable guards or protective devices		N/A
	Moving parts directly involved in the function of the appliance which cannot be made completely inaccessible fitted with:		—
	- fixed guards or interlocking movable guards preventing access to those sections of the parts that are not used in the work, and		N/A
	- adjustable guards restricting access to those sections of the moving parts where access is necessary		N/A
	Interlocking movable guards used where frequent access is required		N/A

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
21.1	Appliances and their components and fittings have adequate mechanical strength and is constructed to withstand such rough handling that may be expected in normal use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance		P
22.ZE.1	For appliances provided with a seat, the seat gives adequate stability		N/A
	The distance between the seat and the control devices capable of being adapted to the operator		N/A
22.ZE.2	For appliances provided with separate devices for the start and the stop functions, the stop function is unambiguously identifiable and does always override the start function		N/A
	For appliances provided with one device performing the start and the stop function, the stop function is unambiguously identifiable and does always override the start function		P
22.ZE.3	Appliances designed in such a way that incorrect mounting is avoided, if this can lead to an unsafe situation		N/A
	If this is not possible, information on the correct mounting is given directly on the part and/or the enclosure		N/A
22.ZE.4	Where the weight, size or shape prevents appliances from being moved manually, they are fitted with attachments for lifting gear, or		N/A
	so designed that they can be fitted with such attachments, or		N/A
	be shaped in such a way that standard lifting gear can easily be used		N/A
	Appliances to be moved manually are constructed or equipped so that they can be moved easily and safely		P
22.ZE.5	The fixing systems of fixed guards which prevent access to dangerous moving transmission parts only removable with the use of tools		N/A
	If such guards have to be removed by the user for routine cleaning or maintenance their fixing systems remain attached to the fixed guards or to the machine after removal		N/A
	Where possible, guards are incapable of remaining in place without their fixings		N/A
	This does not apply if, after removal of the screws, or if the component is incorrectly repositioned, the appliance becomes inoperative		N/A

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	Movable guards are interlocked		N/A
	The interlocking devices prevent the start of hazardous appliance functions until the guards are fixed in their position, and give a stop command whenever they are no longer closed		N/A
	Where it is possible for an operator to reach the danger zone before the risk due to hazardous appliance functions has ceased, movable guards associated with a guard locking device in addition to an interlocking device that:		—
	- prevents the start of hazardous appliance functions until the guard is closed and locked, and		N/A
	- keeps the guard closed and locked until the risk of injury from the hazardous appliance functions has ceased		N/A
	Interlocking movable guards remain attached to the appliance when open, and		N/A
	they are designed and constructed in such a way that they can be adjusted only by means of an intentional action		N/A
22.ZE.6	Interlocking movable guards designed in such a way that the absence or failure of one of their components prevents starting or stops the hazardous appliance functions		N/A
	The guard is opened to the extent needed to cause the interlocking to operate and is then closed, the number of operations being defined in the specific Part 2		N/A
	After this test any defect that may be expected in normal use is applied to the interlock system, including interruption of the supply, only one defect being simulated at a time		N/A
	After these tests the interlock system is fit for further use		N/A
22.ZE.7	Adjustable guards restricting access to areas of the moving parts strictly necessary for the work are:		—
	- adjustable manually or automatically, depending on the type of work involved, and		N/A
	- readily adjustable without the use of tools		N/A
22.ZE.8	In case of interruption, re-establishment after an interruption or fluctuation in whatever manner of the power supply, the appliance does not restart		N/A
	However, automatic restarting of the operation is allowed if the appliance may continue to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage interruption or fluctuation occurred		P

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
22.ZE.9	Appliances fitted with means to isolate them from all energy sources		P
	Such isolators are clearly identified, and		P
	they are capable of being locked if reconnection endanger persons	Reconnection does not endanger persons	N/A
	After the energy source is disconnected, it is possible to dissipate any energy remaining or stored in the circuits of the appliance without risk to persons		P
ZF	ANNEX ZF (INFORMATIVE) CRITERIA APPLIED FOR THE ALLOCATION OF PRODUCTS COVERED BY STANDARDS IN THE EN 60335 SERIES UNDER LVD OR MD		—
	List of standards under CENELEC/TC61 with the allocation under the LVD (Low Voltage Directive) or the MD (Machinery Directive)	2006/42/EC	P
ZG	ANNEX ZG (NORMATIVE) UV APPLIANCES		—
	The following modifications to this standard apply to appliances having UV emitters		N/A
	This annex is not applicable to appliances covered by the scopes of IEC 60335-2-27, IEC 60335-2-59 or IEC 60335-2-109		N/A
7.12.ZG	The instructions for appliances incorporating UVC emitters include the substance of the following: WARNING — This appliance contains a UV emitter. Do not stare at the light source		N/A
32	For appliances incorporating UV emitters the manufacturer delivers a declaration providing evidence that the plastic material exposed to the radiation is UV resistant		N/A
ZZ	ANNEX ZZ (INFORMATIVE) COVERAGE OF ESSENTIAL REQUIREMENTS OF EC DIRECTIVES		—
	Description of the relation between this European standard and the LVD (Low Voltage Directive, 2006/95/EC) and the MD (Machinery Directive, 2006/42/EC)		P

IEC60335_2_79E – ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict

Annex EN 62233:2008			
Clause	Requirement + Test	Result - Remark	Verdict
EMF- ELECTROMAGNETICS FIELDS			
	The tested product also complies with the requirements of EN 62233:2008		-
	Limit 100%	Measured max.: 3,18%	P
Supplementary information:			

PICTURES



Front view



Right view

PICTURES



Left view




Rear view

PICTURES



External connection / drain

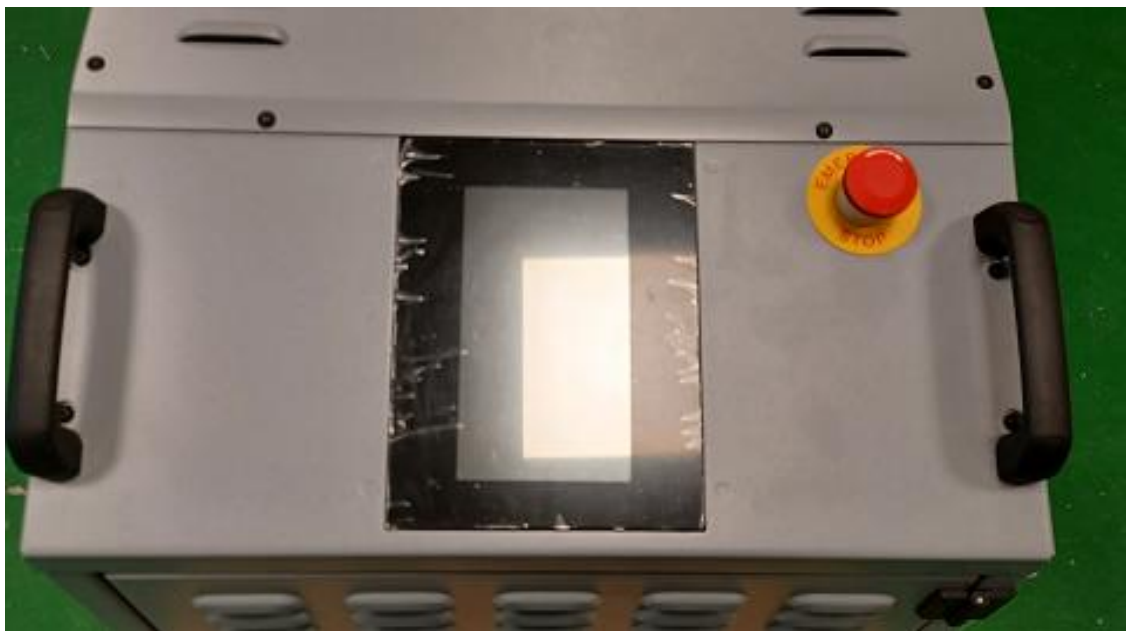


Panel board

PICTURES



Reservoir taps

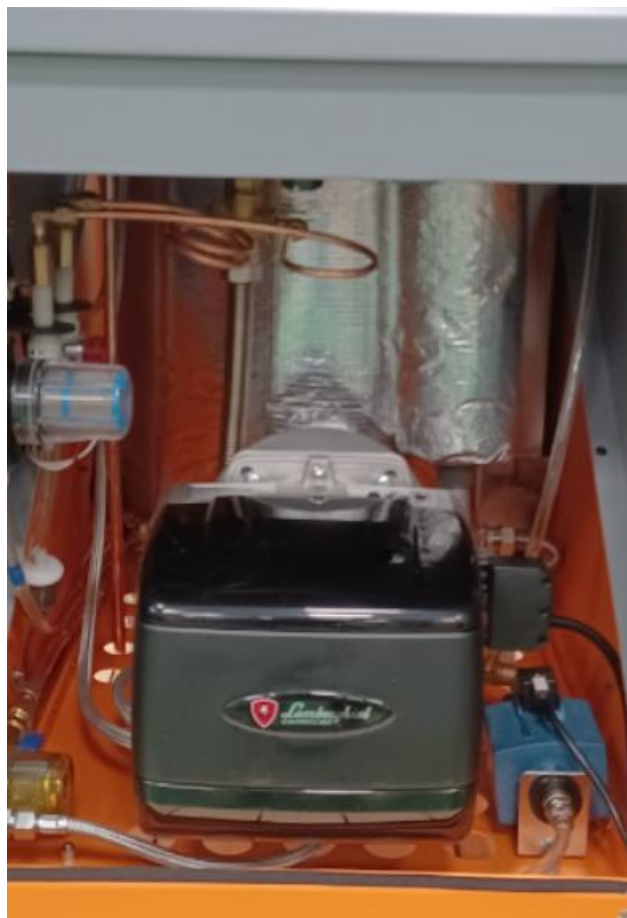

Internal view with hinged door opened

PICTURES



Internal view without burner unit cover



Rear without cover

PICTURES



Water refilling pump markings




Pressure transducer markings

PICTURES




Emergency switch markings

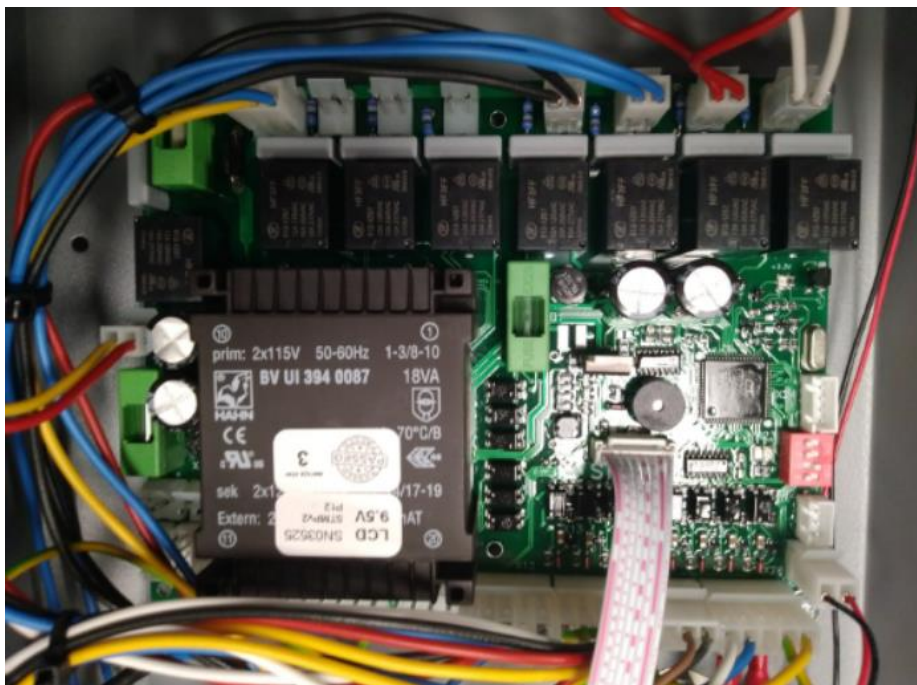

Main printed board (front)

PICTURES

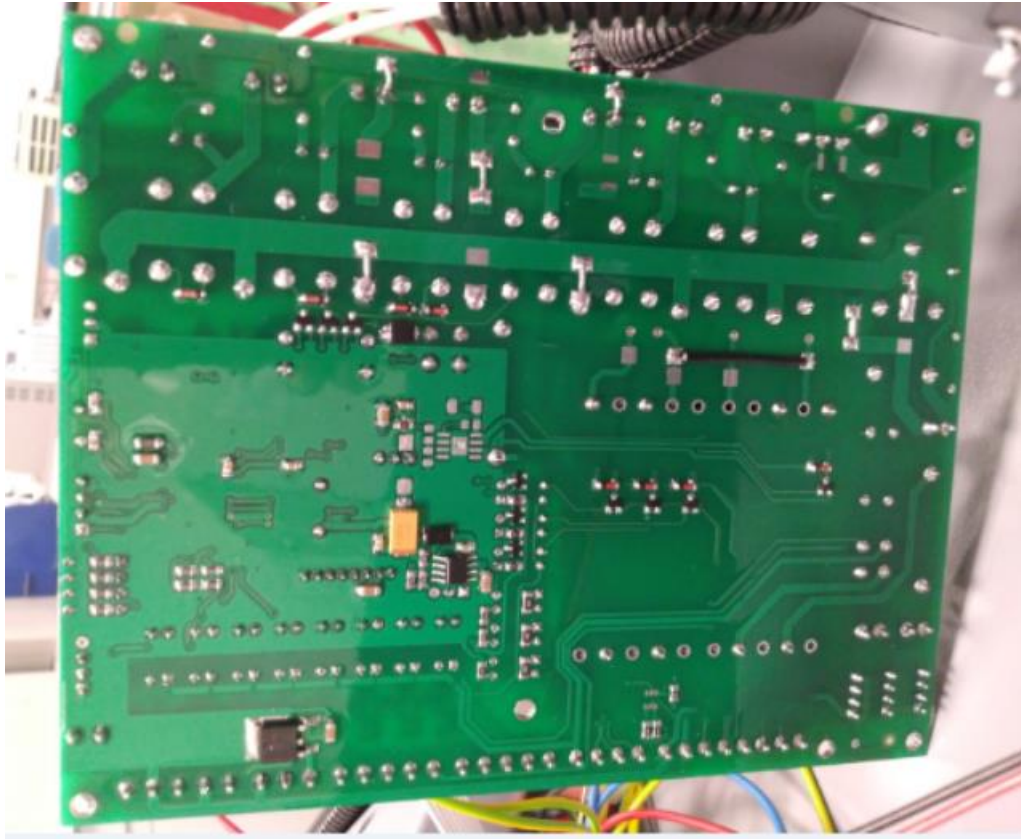

Main printed board (rear)




Markings of RFI capacitor on main board

PICTURES



Oil pump

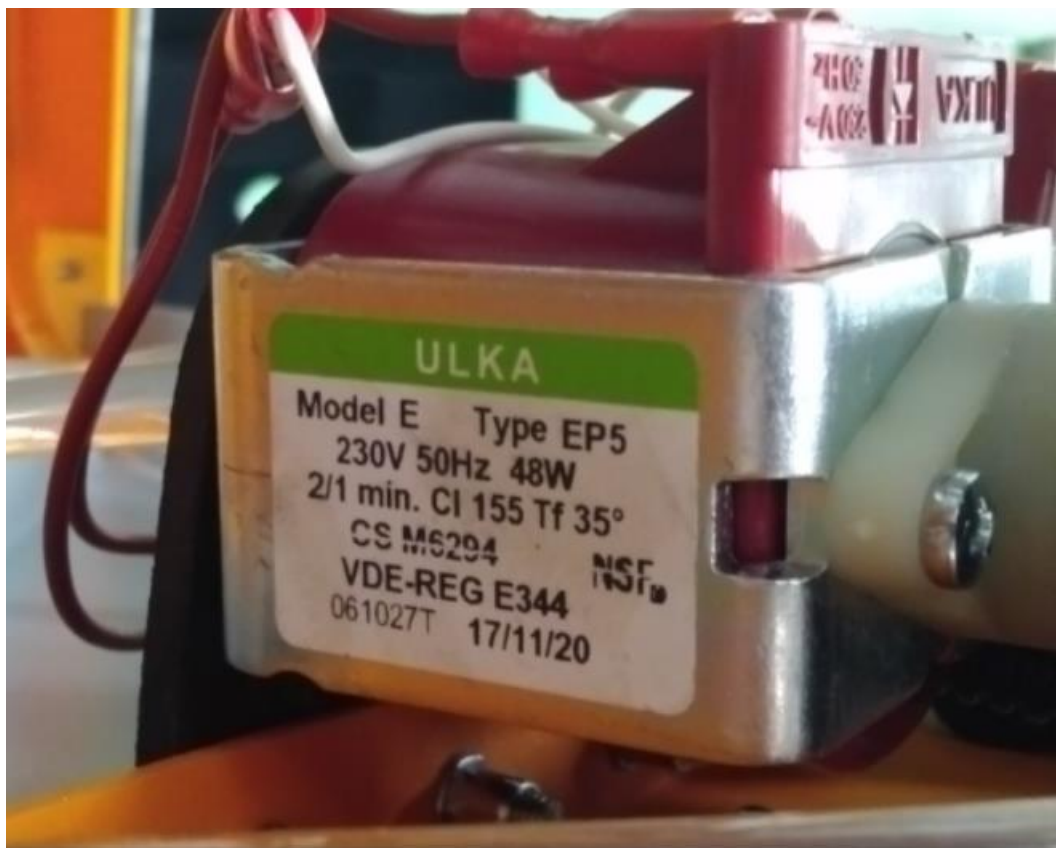

Vibrating pump markings

PICTURES



Motor fan




Display board

PICTURES



Pressure relief device

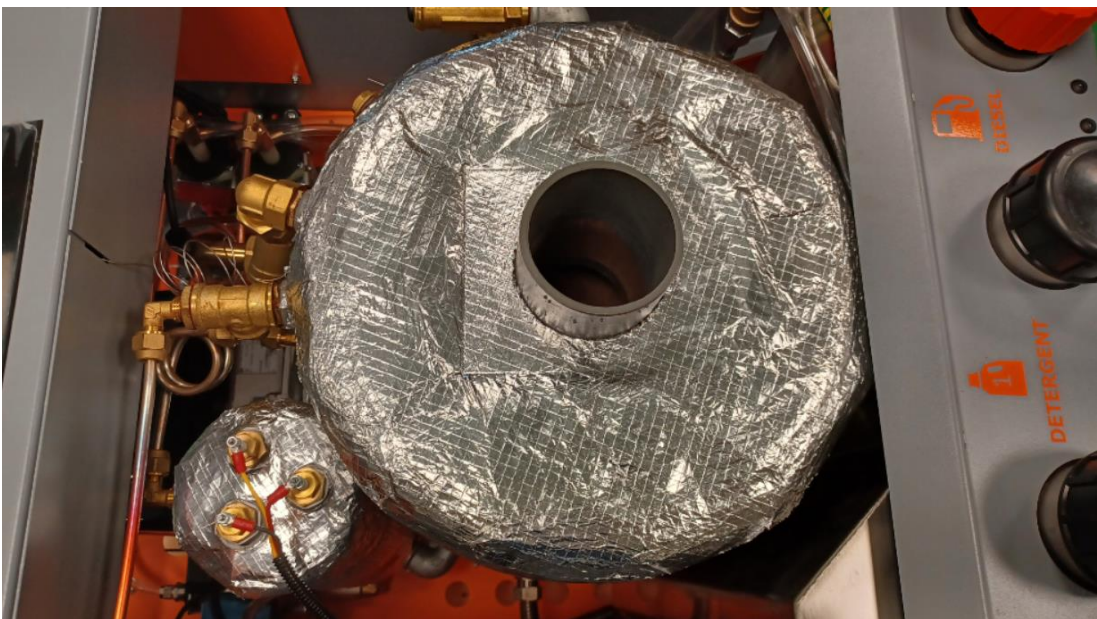


Upper view without cover

PICTURES




Burner unit markings

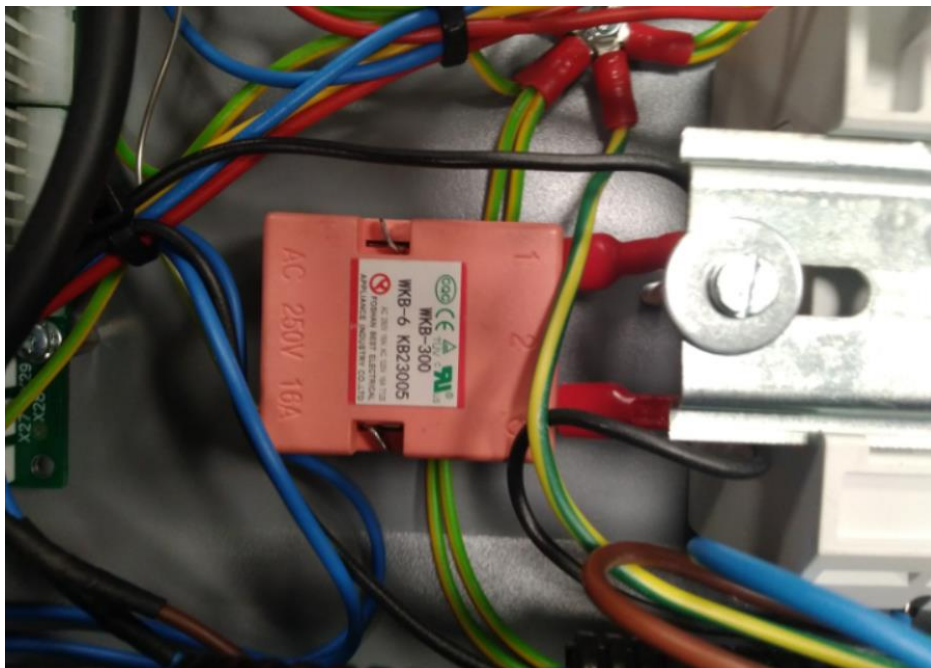


Capillary self resetting thermal cut-out

PICTURES

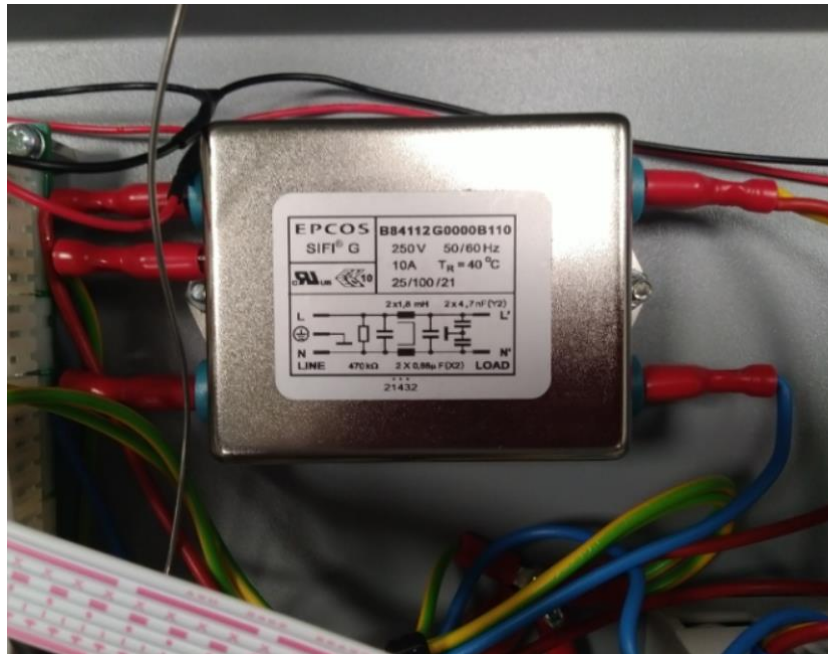

Main radio interference filter

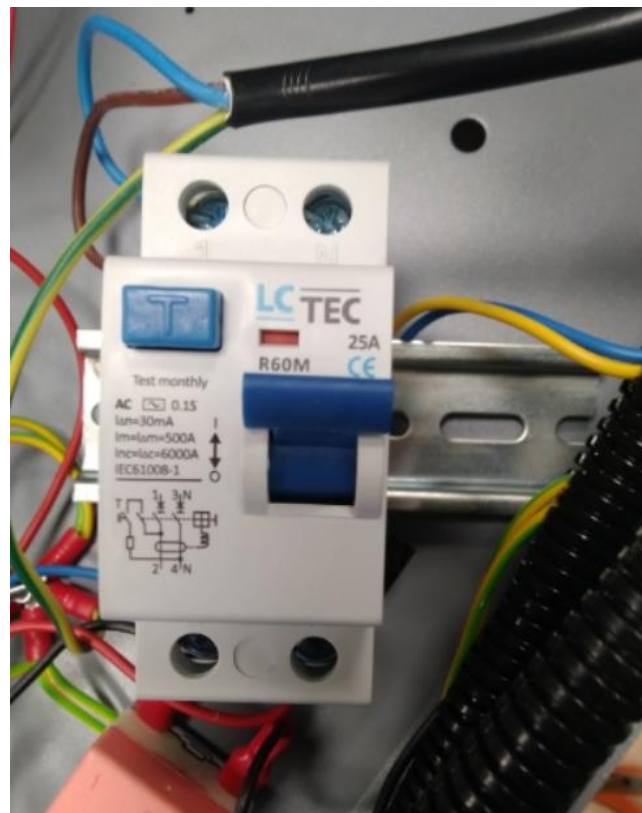

Residual current device

PICTURES



Ignition board unit



Earthing connection on hinged door

PICTURES



Burning unit radio interference filter



Earthing terminal (to be added symbol)

PICTURES




Ignition board unit PCB (rear)



Ignition board unit PCB (front)

PICTURES

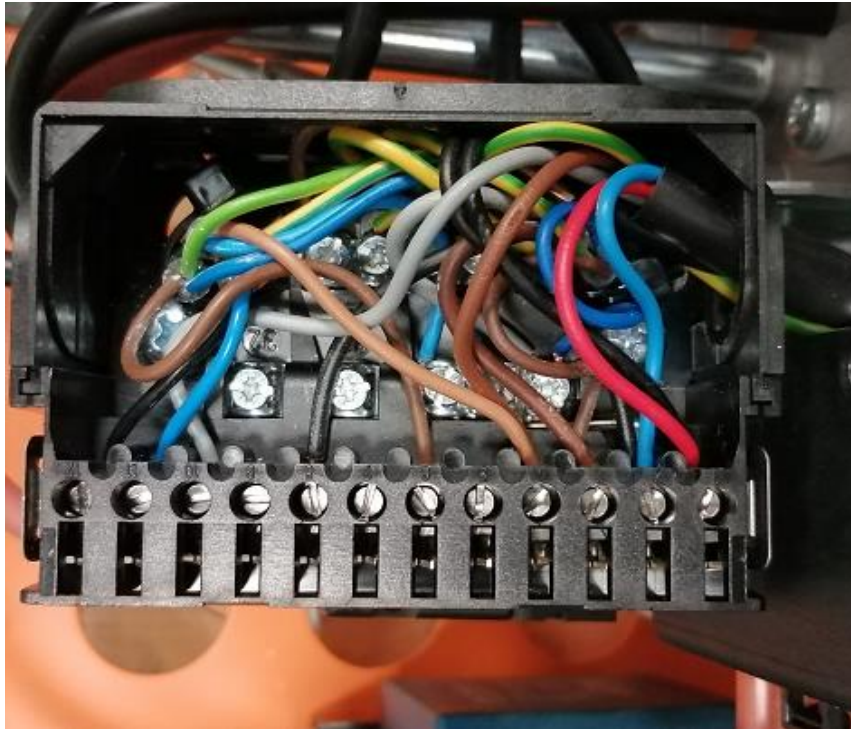

Ignition board unit connection



Oil pump motor capacitor

PICTURES



Ignition transformer



Oil motor pump markings

PICTURES



Water mains solenoid valve




Trigger gun

PICTURES



Trigger gun opened

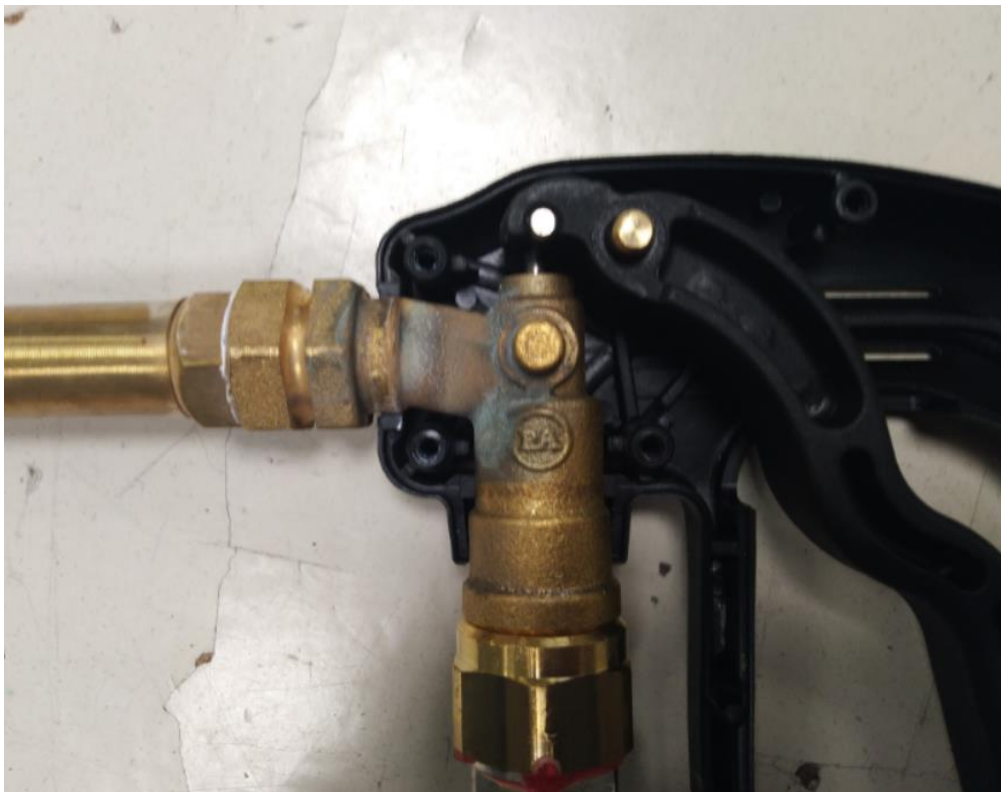

Detail of trigger gun mechanism

PICTURES



Markings on right side of trigger gun




Markings on left side of trigger gun

PICTURES



Interlock switch

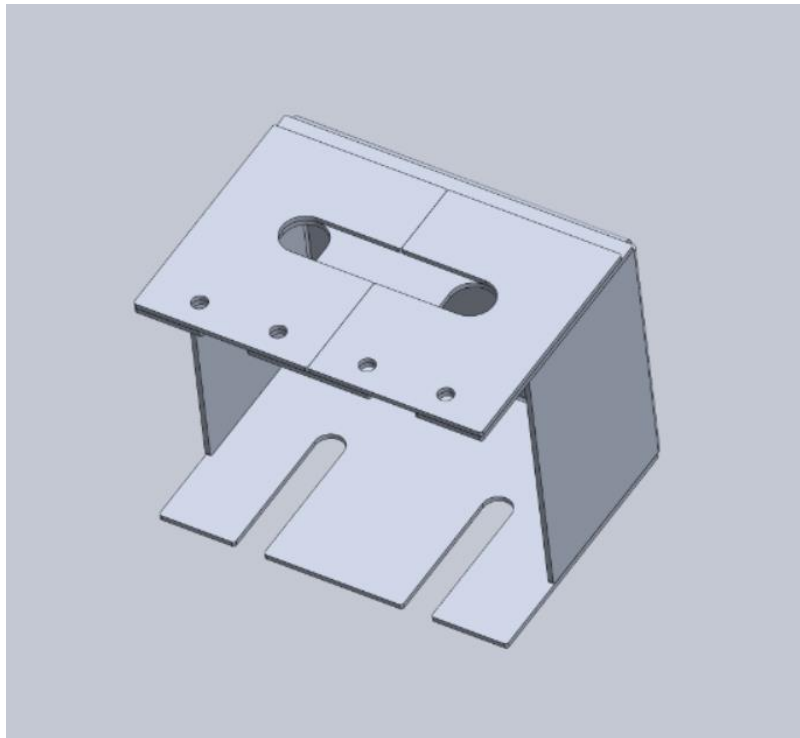

Metallic cover on vibrating pumps